






特点 () :

- * : F20/23*23*19.5mm
- Appearance dimension: F20/23*23*19.5mm
- * : /
- Luminous color and colloid: Red /Red colloid
- * ROHS
- Environmental protection products meet ROHS requirements
- * MSL :2
- *
- *
- *
- *



应用领域 () :


- * ;
- Home appliances, digital, communication
- *
- Automotive Electronics
- *
- Lighting decoration
- *
- electronic toy
- *
- electronic clock
- *
- Traffic instructions
- *
- Medical beauty instruments
- *
- Electronic teaching equipment
- *
- Urban lighting

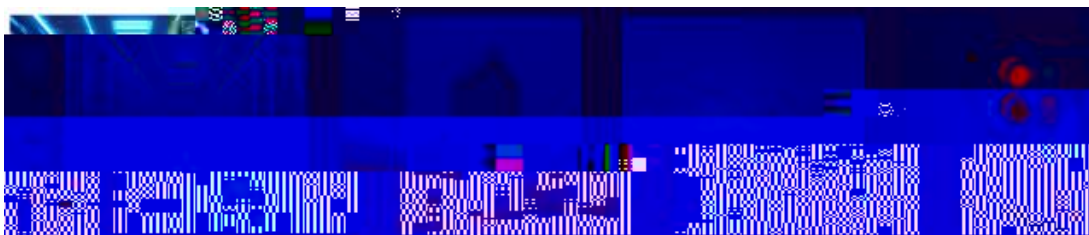



目录

Catalogue




自性参数



bw m 6

6

3





亮度分档


:

 	最小值	最大值	单位	测试条件
---	-----	-----	----	------



电压分档

:

波长分档



典型特性曲线

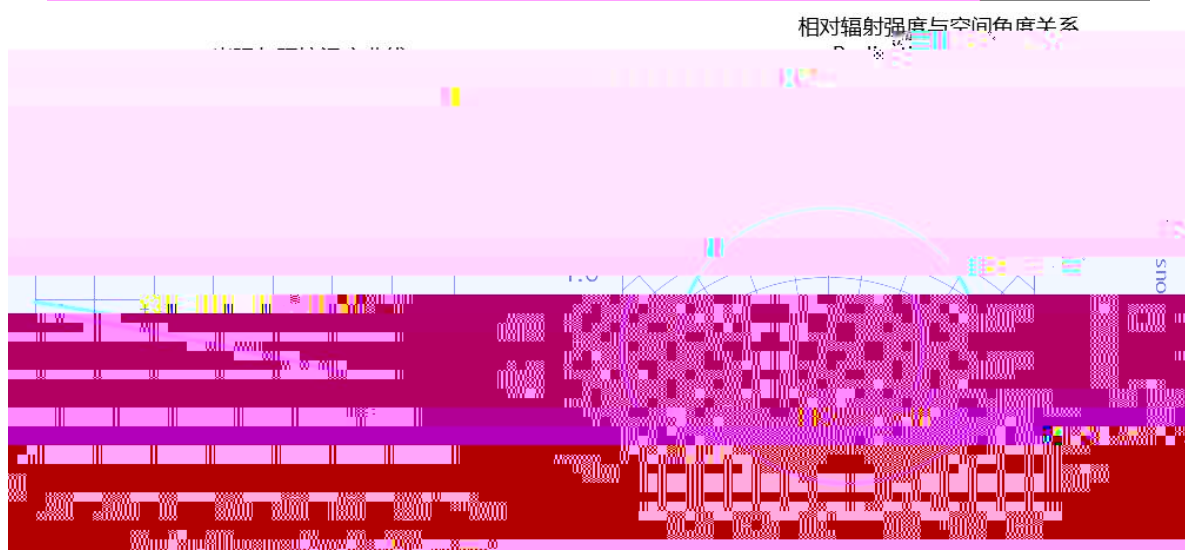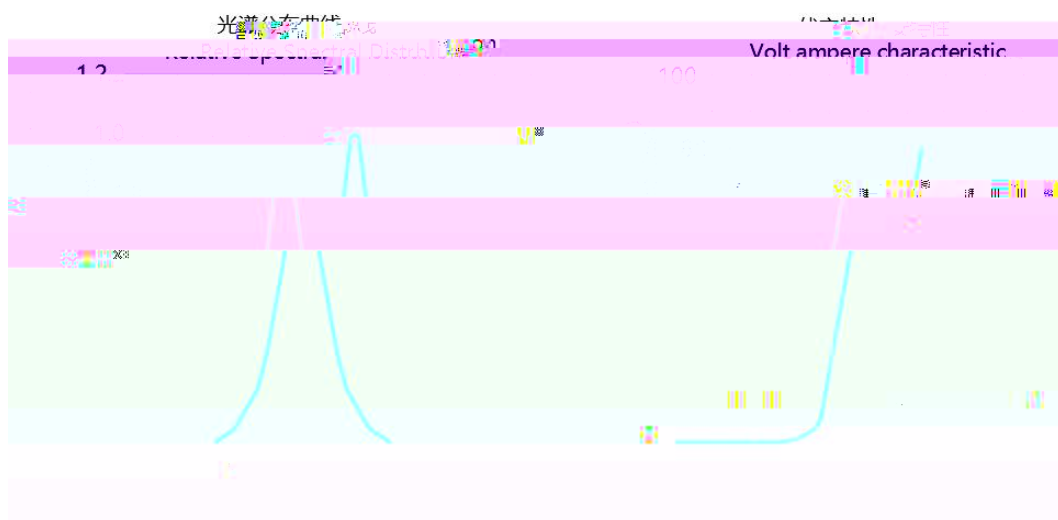


可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	Ta=25 ± 5 , IF=25mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ± 5 -40 ± 5 30mins 5mins 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ± 5 -45 ± 5 5mins 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0 ° ~ 90 ° ~ 0 °	3times	22 PCS	0/1




外形尺寸

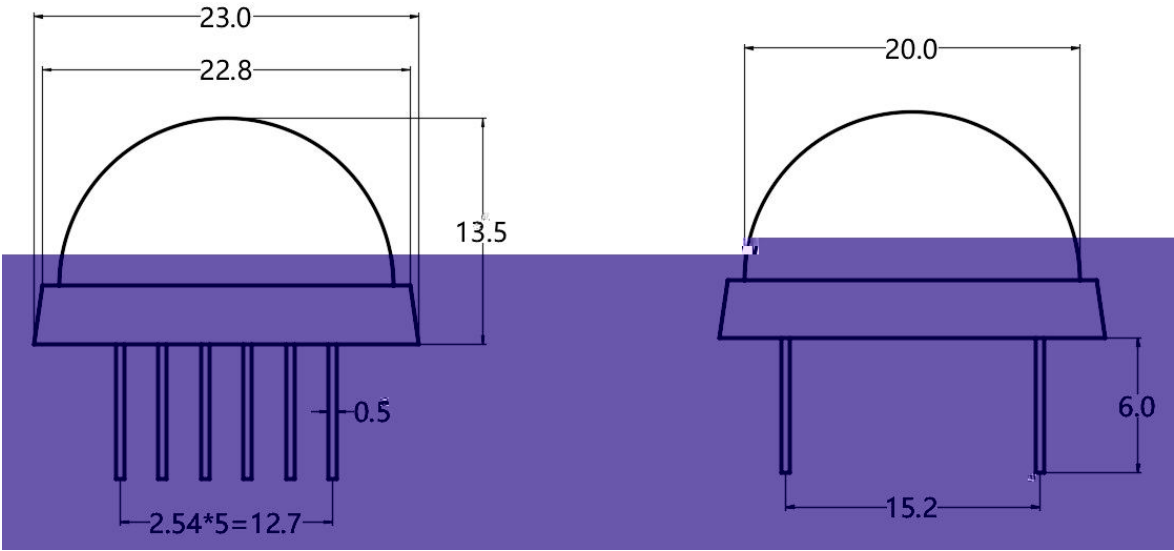


1.

2. mm .





包装

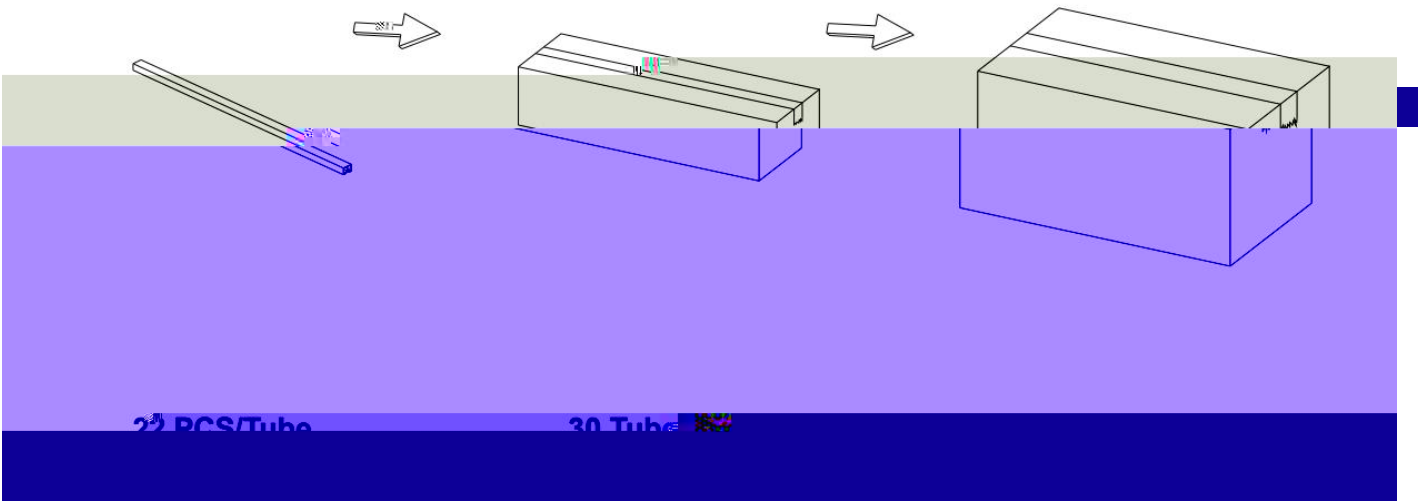

◇ 标签说明：Label Explantion

MPN: 型号	VF: 电压代码
WL: 波长代码	W: 亮度代码
ORIGIN: 产地	QTY: 数量

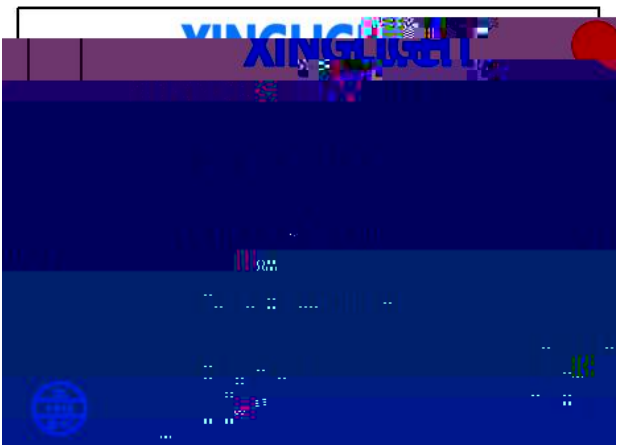



使用注意事項 ()

LED


LED 30 70% LED

3

LED

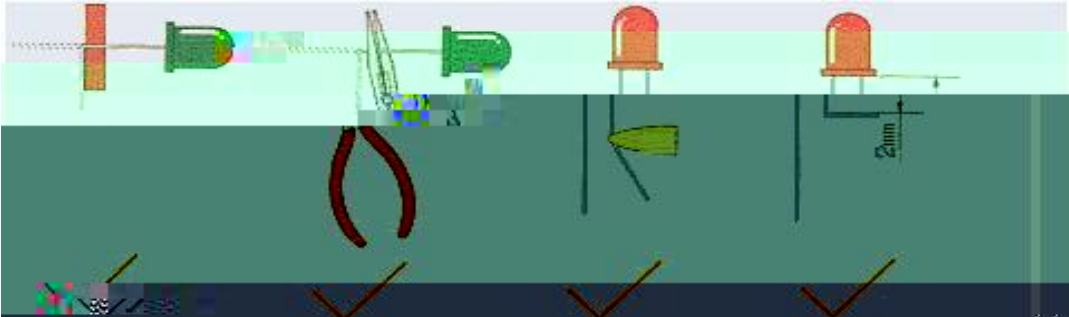

使用注意事項 ()



使用注意事项 ()

8、其他事项:

*

*

DO NOT USE

