










典型特性曲线

Typical Characteristics Curves

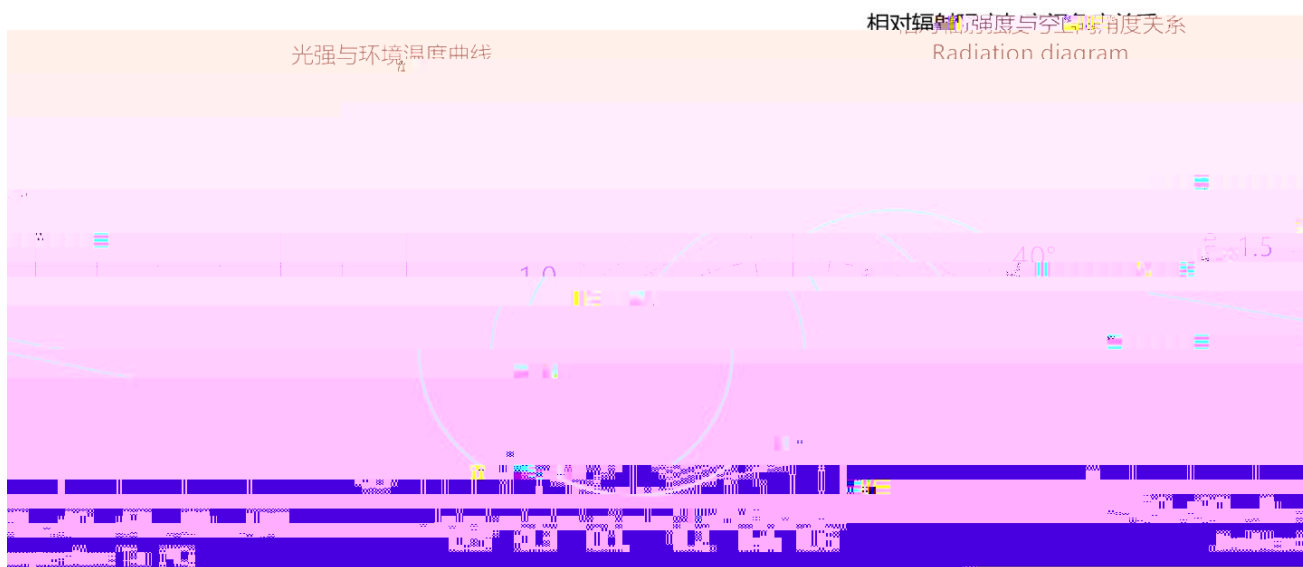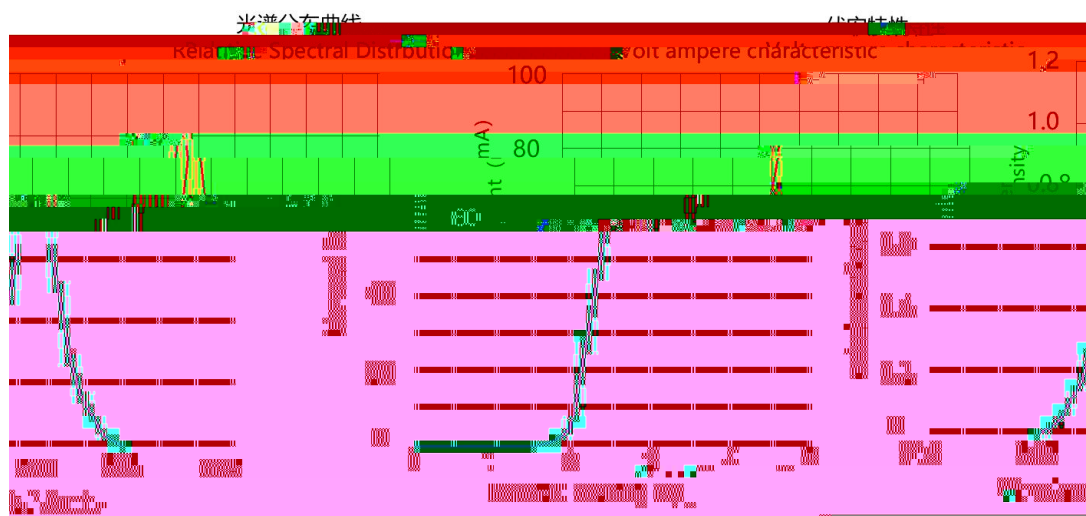

25 5 /Note If not otherwise indicated the test environment temperature is 25 5

Part No. :XL-1005SYGC

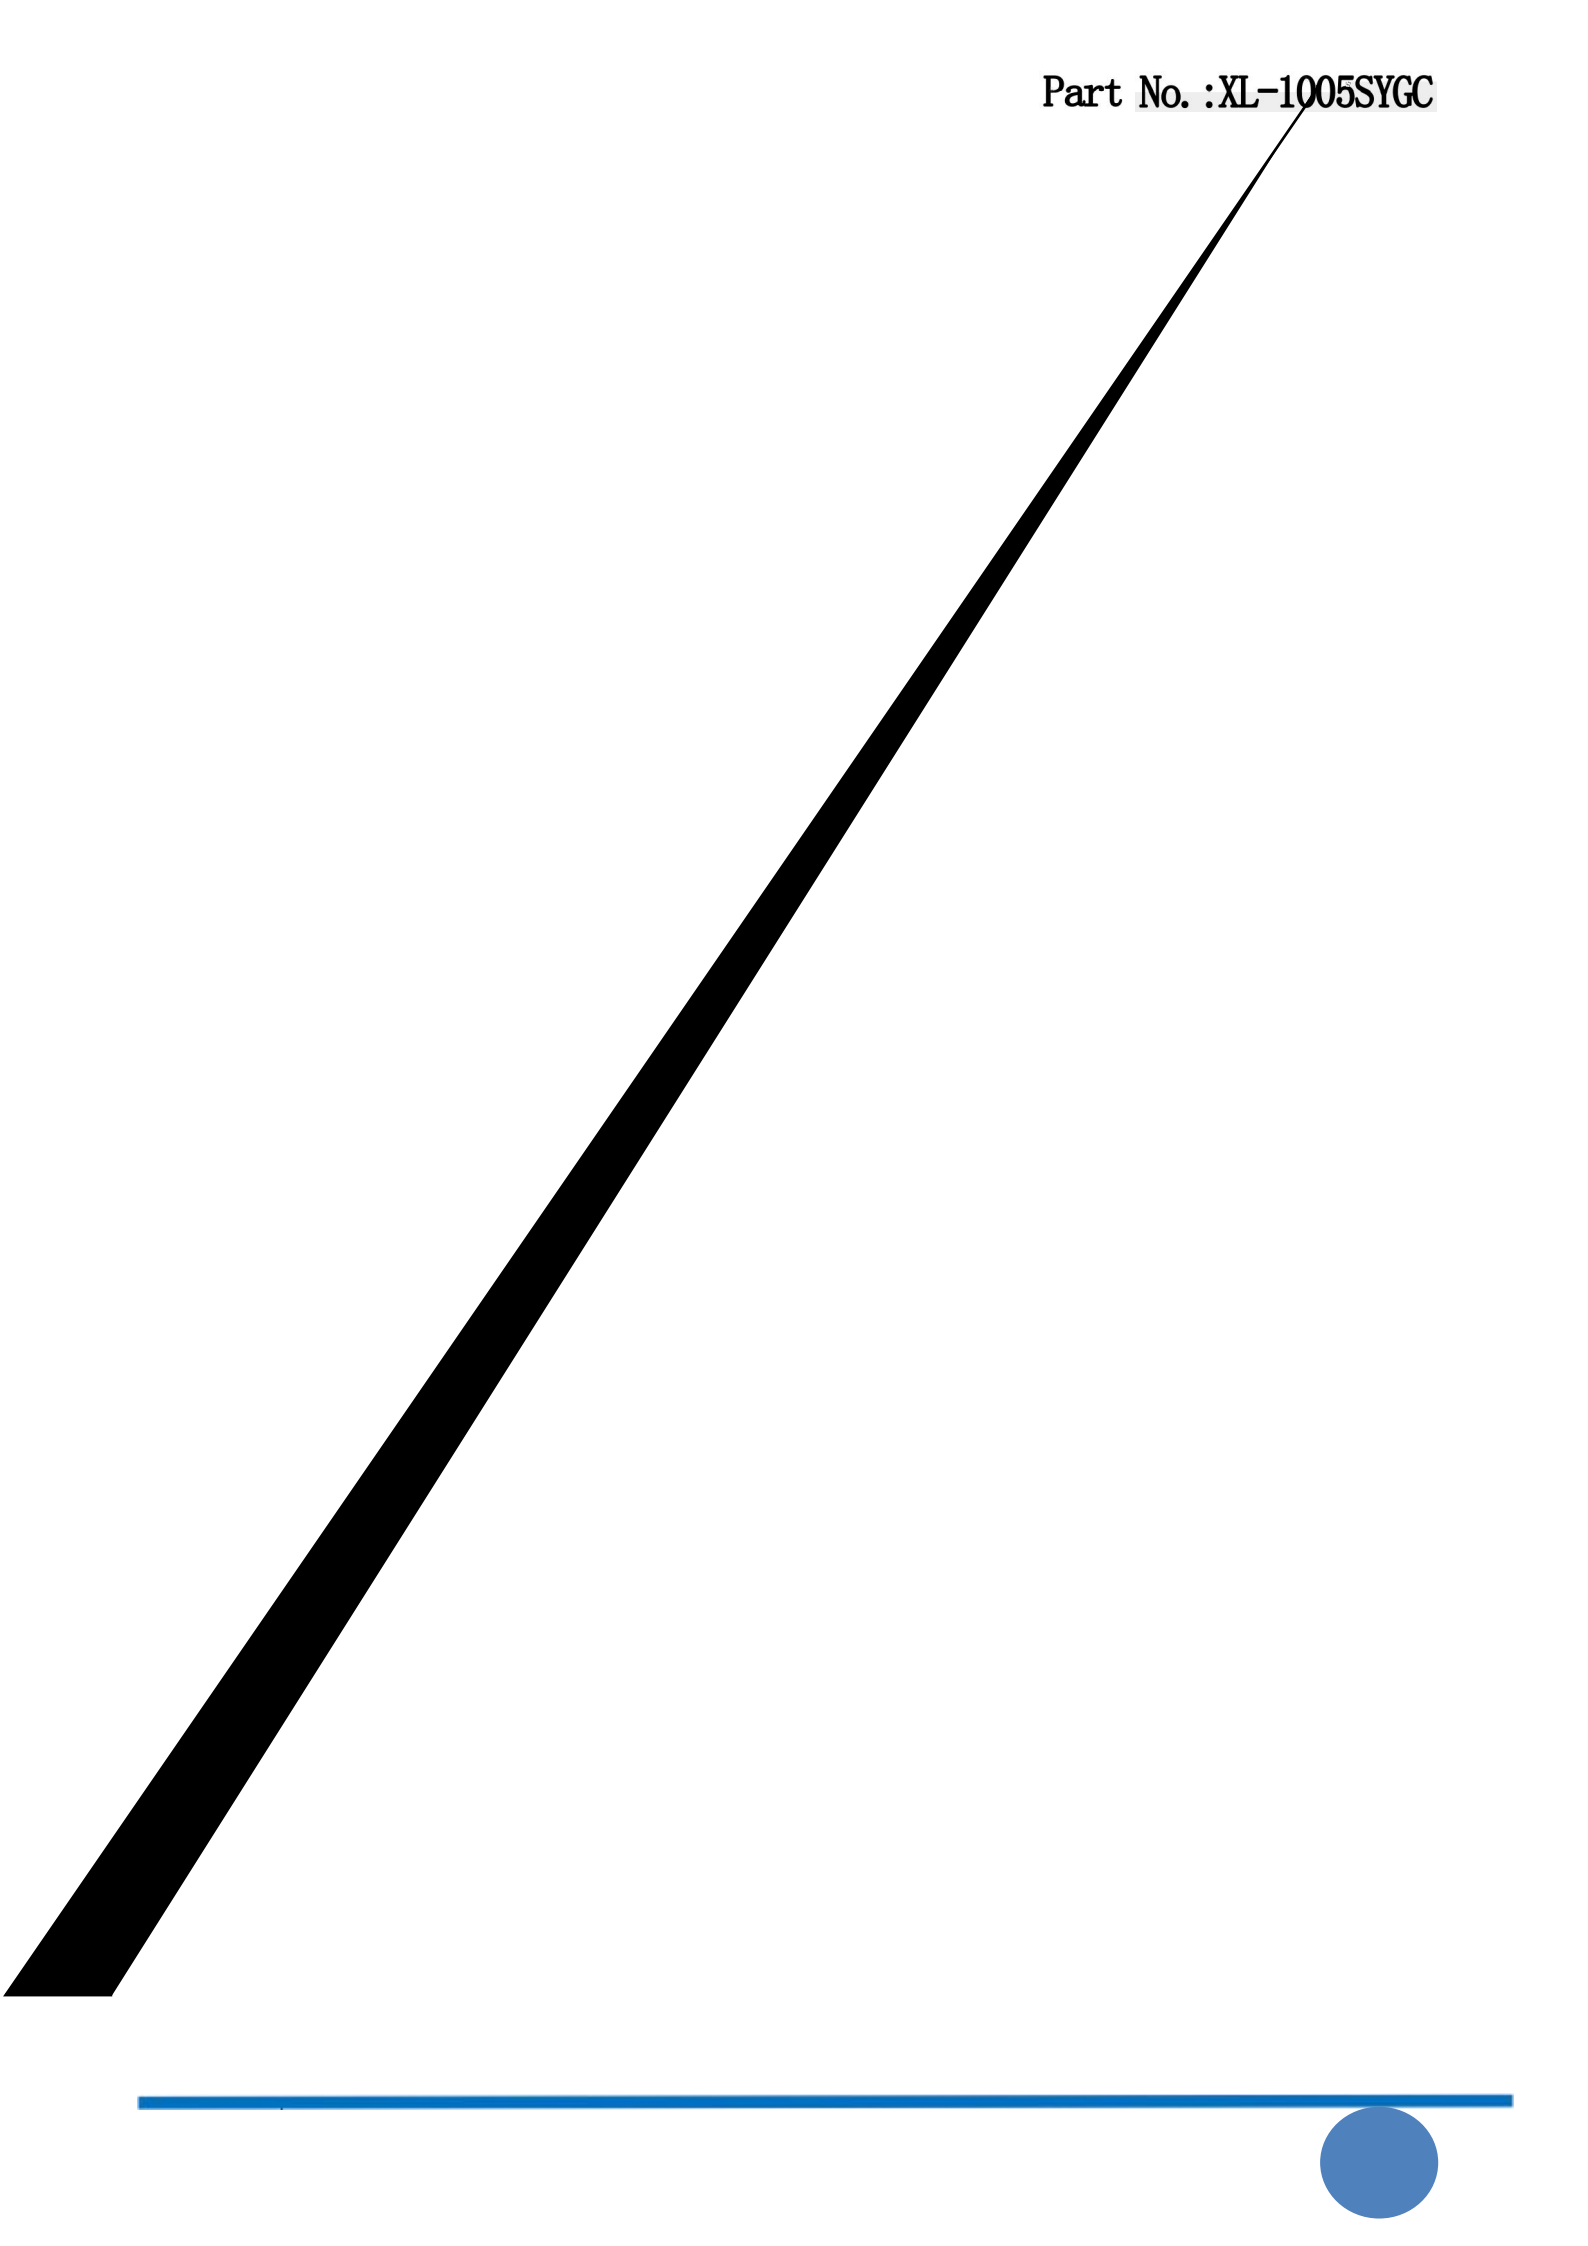









Part No. :XL-1005SYGC



使用注意事项（2）

Precautions (2)

3. 设计建议

Design Consideration

LED

A

LED

B

LED

V_F

LED

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current

!

WJC

1A, 5126

H



使用注意事项（3）

Precautions (3)

