



## 目录

---

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指南

使用注意事项

电性参数



|  |        |      |
|--|--------|------|
|  | Symbol | Unit |
|  |        |      |

Ta=25      Absolute Maximum Rating( ta=25      )

光电参数      Ta=25






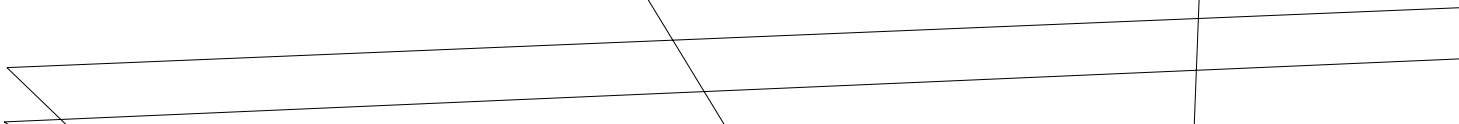






### Packaging (1)

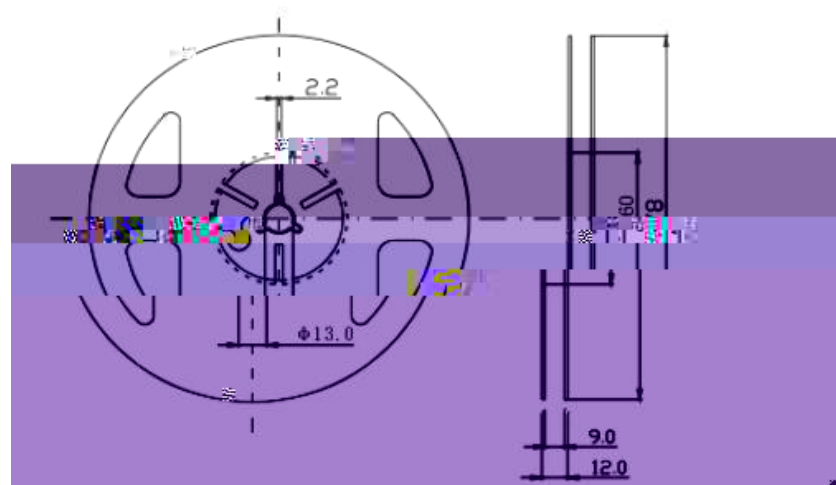
$$\vdots$$


1. (mm)
1. Size unit is mm (mm).
2.  $\pm 0.1\text{mm}$
2. The dimensional tolerance is  $\pm 0.1\text{mm}$ .

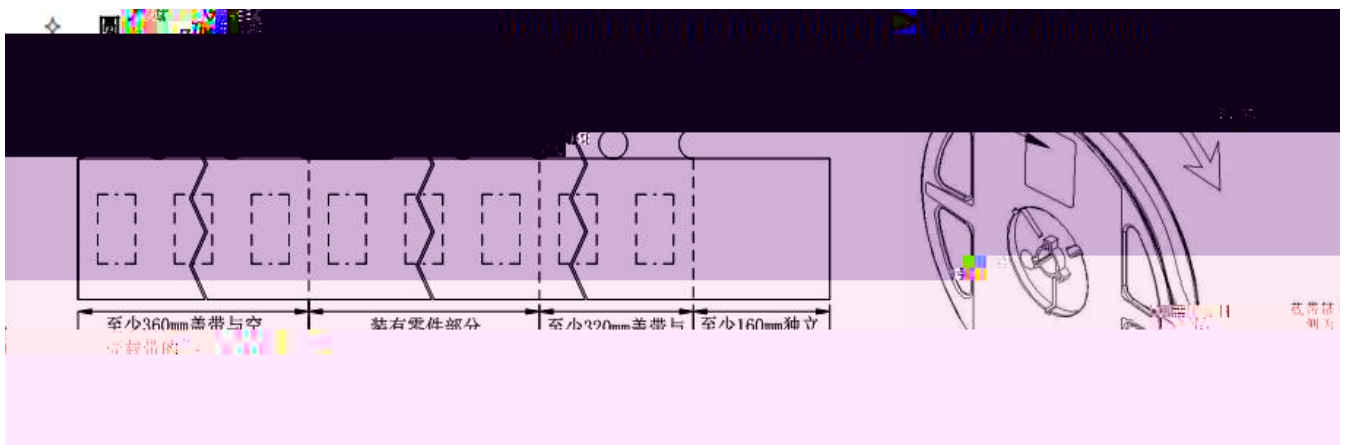



## 包装 (2)

### Packaging (2)



#### 防潮抗静电包装 Moisture Proof and Anti-Static Film Bag

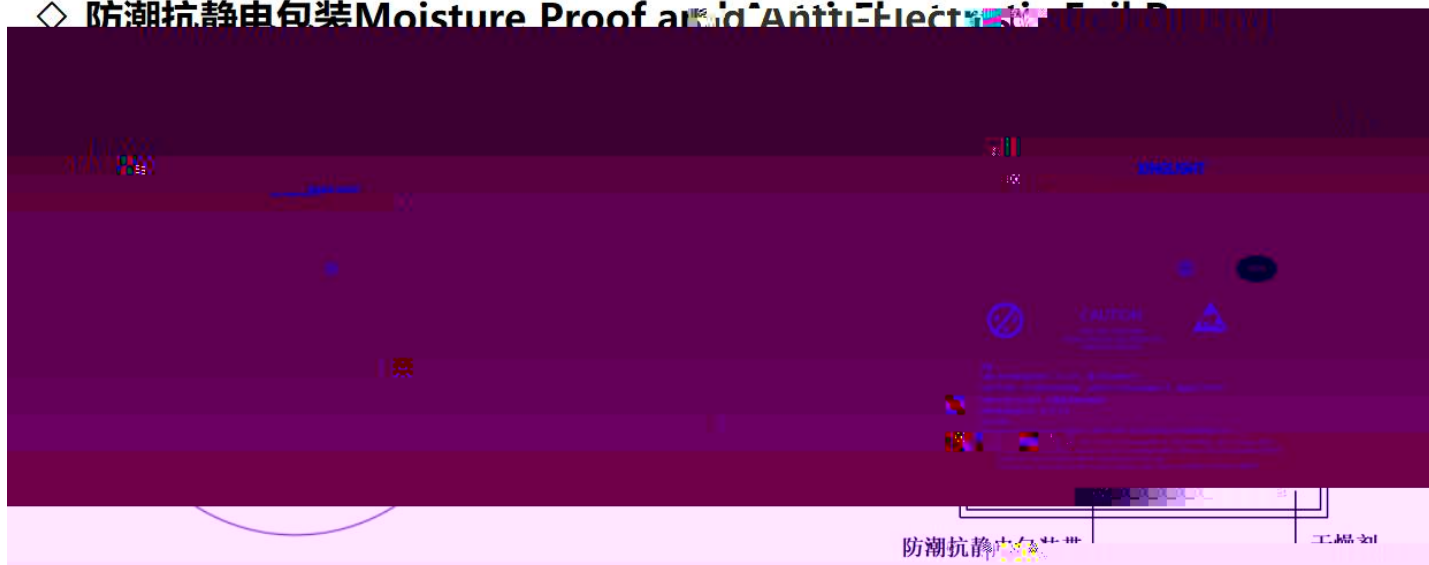

#### 外包装箱 Cardboard Box

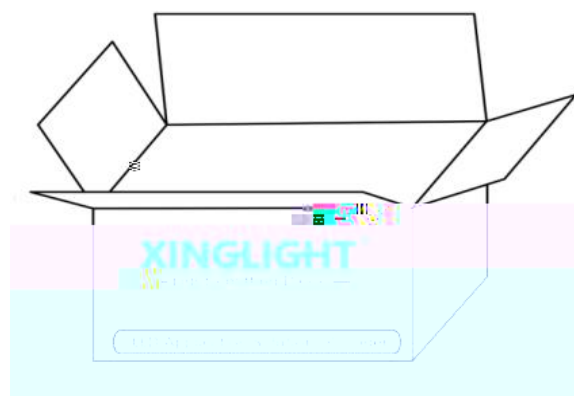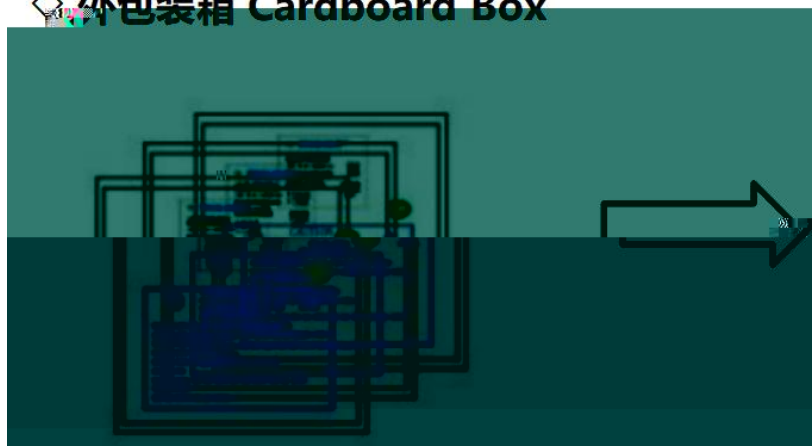

#### 标签说明 Label Expantion

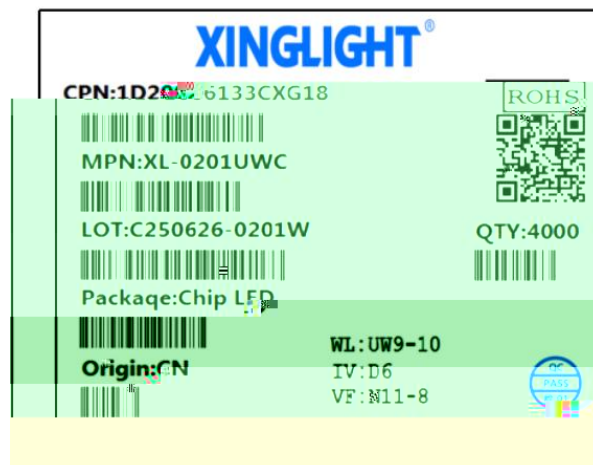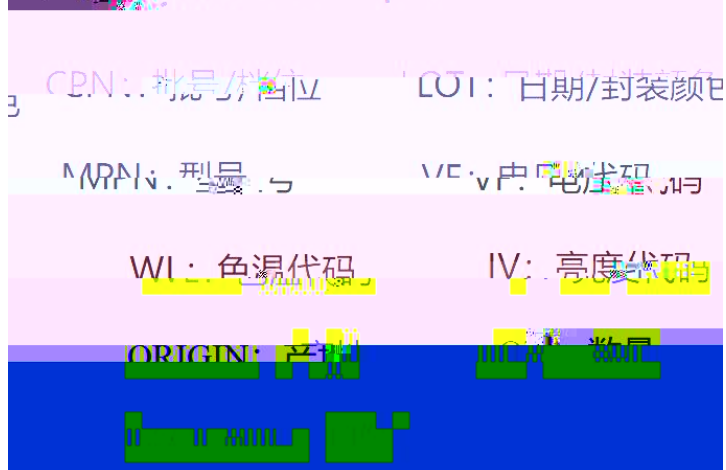

300

30 W

3

LED

Manual welding is recommended only for repair and heavy industry situations. A soldering iron of less than 30W is recommended to be used ito

$b_v$

6



## 使用注意事项 (1)

## Precautions (1)

## 贮存:

Moisture proof and anti-electrostatic package with minimum.

Before opening the package, the product should be kept at 30 used within a year.

30 40%RH




## 使用注意事项 (3)

## Precautions (3)

## 其他事项

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



## LED

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface.

While handling the product with tweezers, do not hold by the epoxy resin, be careful.

## 眼睛保护忠告

## LED

## LED

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

If there are any modifications to the specification sheet, no further notice will be given