目录

电性参数

[redacted]

可靠性实验

[redacted]

包装

[redacted]

使用注意事项

Part [redacted]-A

Part [redacted]-A

[redacted]分档

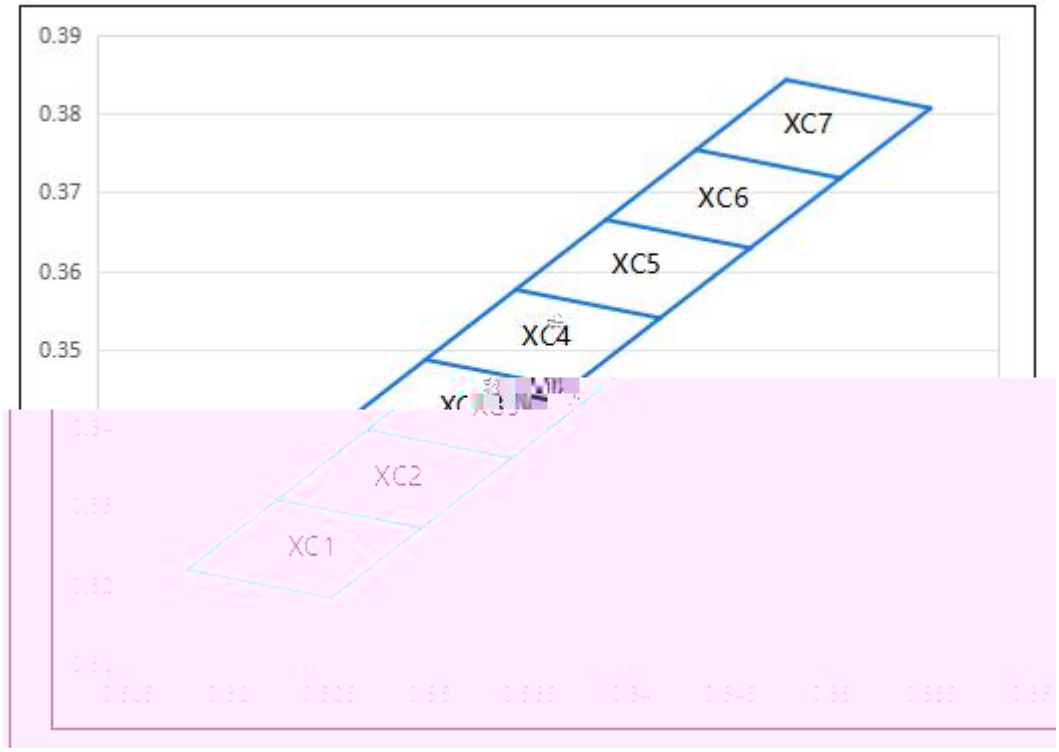

XY	±0.01	XY coordinate error ± 0.01

焊接指导（2）

Guideline for Soldering (2)

清洗：

30 3 50

30

LED

300W LED

LED

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30 for 3 minutes or 50 for 30 seconds. When using other solvents, it should be

使用注意事项（2）

Precautions (2)

[redacted]

LED

A LED B

LED V_F LED

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified

[redacted]

使用注意事项（3）

Precautions (3)

其他事项：

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.

[redacted]