特点（characteristic）：

* L/W/H ס L

目录
Catalogue

Electrical Characteristics.....3

Typical Characteristic Curves.....5

Reliability Test Items And Conditions.....6

Outline Dimensions.....7

Packaging.....8

Precautions.....9

电性参数

Electrical Characteristics

Absolute Maximum Ratings Ta=25

Parameter	Symbol	Red	YG	Unit
Max Power Dissipation	PD	50	50	mW
Max Continuous Forward Current	IF	20	20	mA
Peak Forward Current	IFP	80	80	mA
Operating Temperature Range	TOPR	-20 ~ +85 C		
Storage Temperature Range	TSTR	-40 ~ +85 C		
/ Lead Soldering Temperature/Time	TSOL	reflow soldering manu	240ÁC	6s

亮度分档

Typical Characteristics Curves

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty
Endurance test	Working life	Ta=25 ±5 ,IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85±5 , RH= 85 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85±5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40±5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ±5 30mins 5mins -40 ±5 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ±5 5mins -45 ±5 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0°~ 90° ~0°	3times	22 PCS	0/1

外形尺寸

Outline Dimension

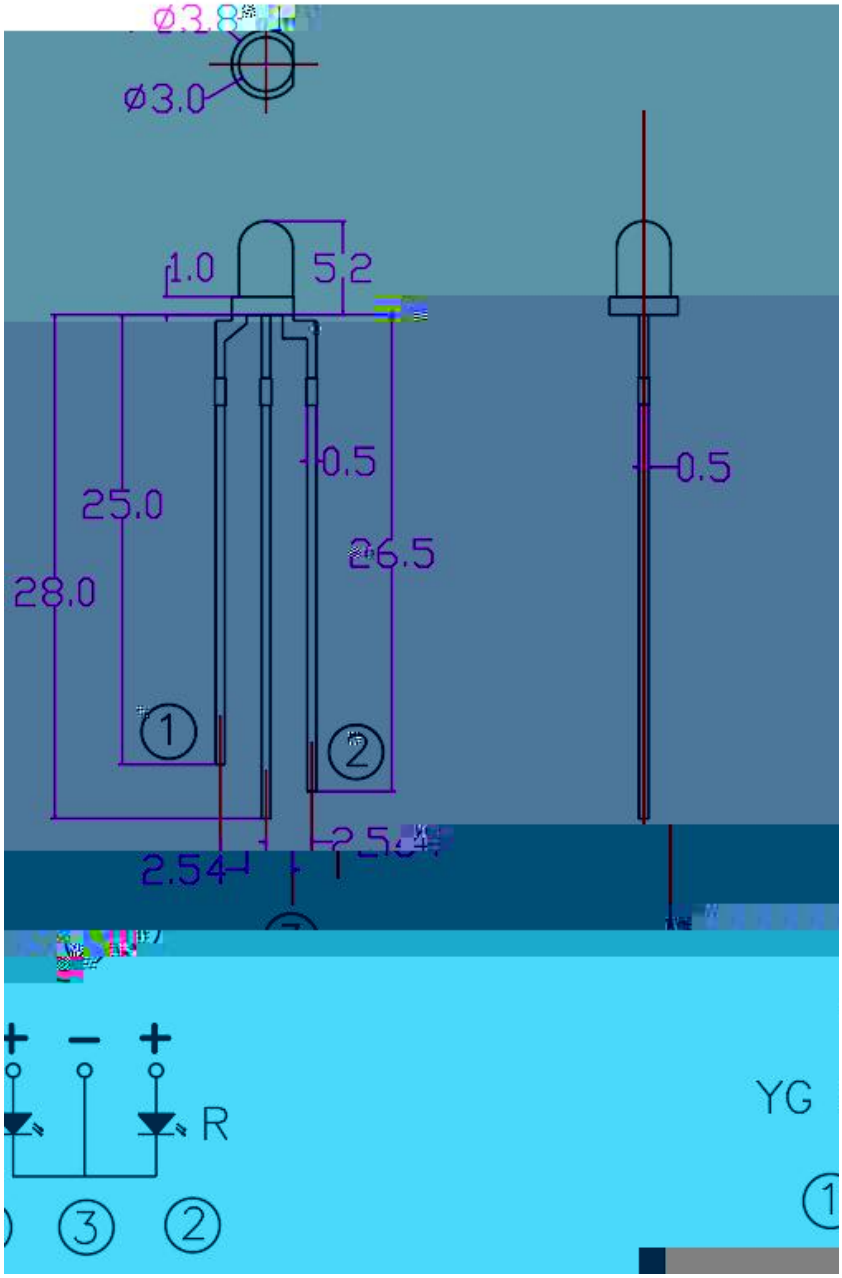

(Note)

1.

Dimensions are in millimeters.

2. Ñ 0.50mm .

Tolerances unless mentioned are Ñ 0.50mm.

包装

Packaging

*

In Bags

*

Moisture Proof and Anti-Electrostatic Foil Bag

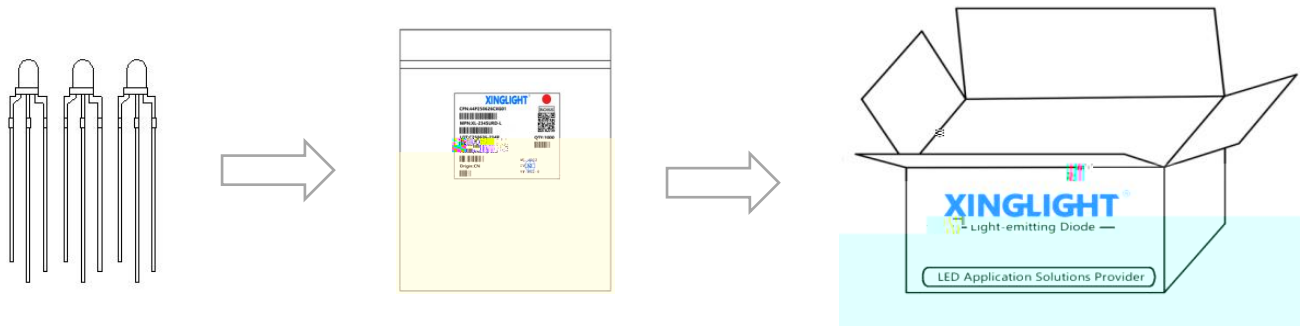

使用注意事项（1）

Precautions (1)

1. **APPLY**

LED FJ 6 LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

2. **Keep in storage**

ide v

[redacted]

使用注意事项（2）

Precautions (2)

5. Weld

2mm LED
LED

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.

6. Drive way

LED LED A LED LED

In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resistance to each LED to ensure the consistent brightness of LED.

Circuit model A **Circuit model B**

7. Electrostu

使用注意事项（3