

92B6

XINLIGHT®

Part

3535 球头紫 1W 贴片式发光二极管

特点 (C) :

* 1.5W/H 3.5*3.5*2.0 mm

Outline Dimensions (Le/

1/12

2.7°
O III

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接位置

使用注意事项



辐射功率:

代码	最小值	最大值	单位	测试条件
P3-1	500	600	mw	IF=350mA
P3-2	600	750		

电压:

:

代码	最小值	最大值	单位	测试条件
N13-5	3.2	3.4	V	IF=350mA
N13-6	3.4	3.6		
N				

波长:

:






© 2018 XINGLIGHT®
part of the XINGLIGHT® family

4H EP @ 7€



Packaging (1)

载带与圆盘尺寸

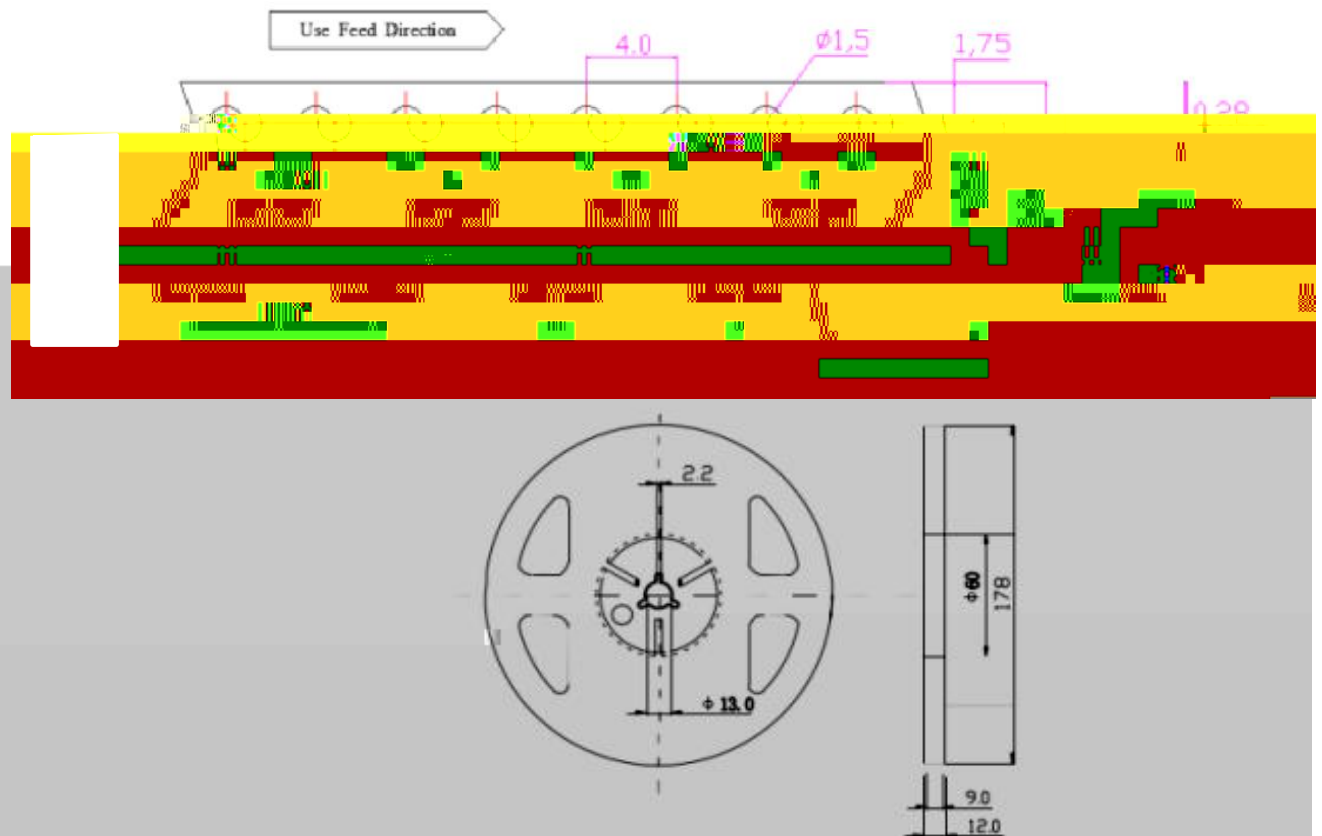


注：1. 所有只...

Notes: 1. All dimensions are in millimeters ;

2. 除非另有说明, 公差按

◆ 圖 1 盤及載帶卷出方向及空穴規格 Disk and carrier belt direction of roll and hole dimensions



包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag



◇ 外包装箱 Cardboard Box



◇ 标签说明 Label Explanation

CPN: 批号/档位 LOT: 日期/封装颜色

MPN: 型号 VF: 电压代码

WL: 波长代码 IV: 亮度代码

ORIGIN: 产地 QTY: 数量

PACKAGE: 封装



lder_

3

recommended

eN<<



设计建议:

LED




使用注意事项 (3)

Precautions (3)

其他事项:

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

眼睛保护忠告:

LED

LED

Viewing direct to the light

