贴片式发光二极管

特点（F ）：

* L/W/H :5.7*3.0*0.8 mm

Outline Dimensions (L / w / h): 5.7*3.0*0.8 mm

* Ŭ ѽ Ĭ r : / r

Luminous color and colloid:High brightness green / water colloid

* Ḡ ROHS

Environmental protection products Complied With ROHS Directive

* MSL :3

Moisture sensitivity level MSL : 3 levels

* EIA ‰´

EIA standard packaging

* G SMT

Suitable for SMT automatic production

* G L

Suitable for infrared reflow soldering process

应用领域（P ）：

* ѽ ,

fluorescent tubes, light strips, down lights

*

Commercial lighting display:

* ɒ ɒ

advertising words, advertising light boxes

*LCD ѽ

LCD backlight

*

Decorative lighting: flexible light strip

XINGLIGHT®

Part No.:XL-5730U

外形尺寸

Outline Dimension

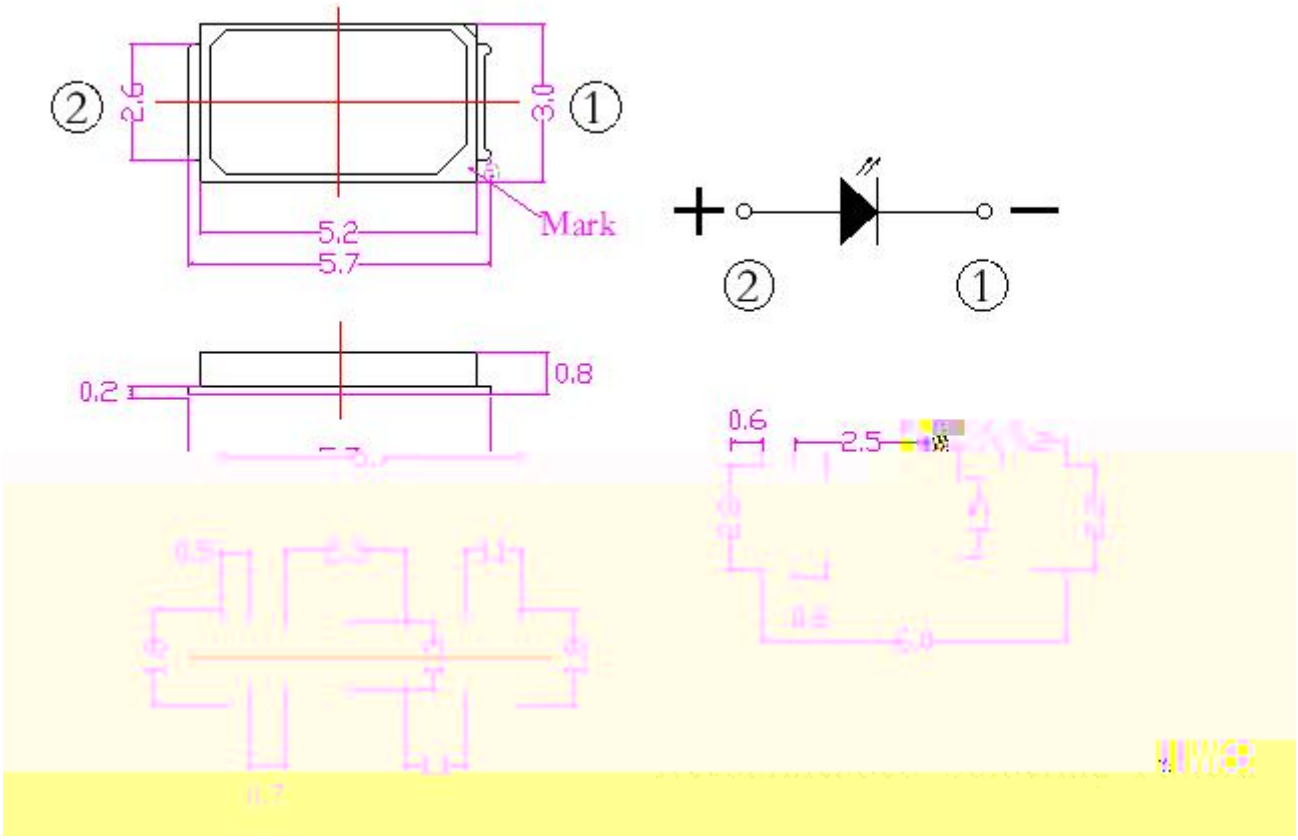

1. γ ϒ β شخ mm

Remarks: All dimensions are in millimeters.

2. ≠ `E `E شخ ±0.25mm

Tolerance is ±0.25mm unless otherwise noted

使用注意事项（3）

Precautions (3)

其他事项

Ů ج p Ψ ˜ G غج ° ج Ĩ ا ز ˜ ذ ṗ
غ غج ~ ° ج ∀ ا ز ≠ ° ج G D عجضي

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED № Ḫ