电性参数

Ta=25 (ta=25)

Consumed power	Pd	R	55	mW
		B	75	
Peak Forward current	IFP	R	80	mA
		B	80	
Forward working current	IF	R	30	mA
		B	30	
Reverse voltage		R	5	V
		B	5	
Antistatic ability				

使用注意事项（2）

Precautions (2)

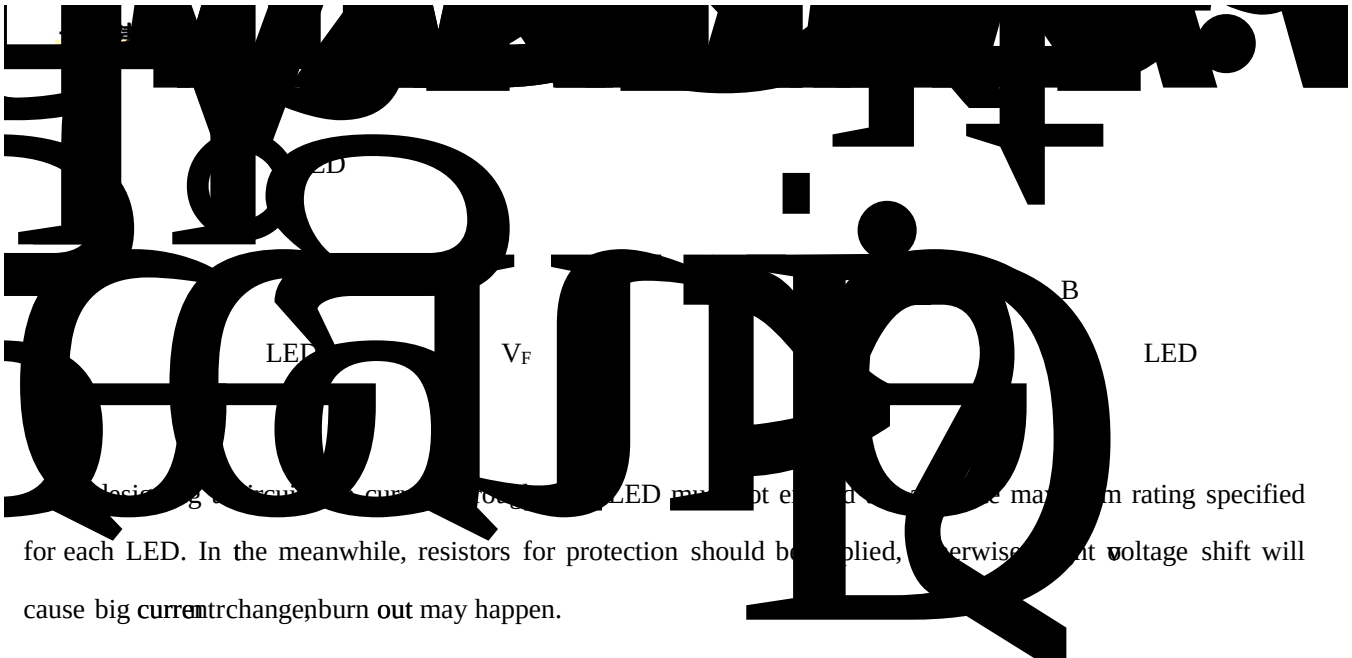

B

LED V_F LED

for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current