

技术数据表

目录

Catalog

电性参数

电性特性曲线

可靠性实验

外形尺寸

包装

使用注意事项

自性参数

Supply Voltage	VDD	6.0	V
Operating ambient temperature	Topr	-20 °C ~ +85 °C	
Storage ambient temperature	Tstg	-40 °C ~ +125 °C	
Welding conditions	Tsol	Wave soldering manual welding	260°C 6s 300°C 3s

Working current	ICC		0.2	0.3	0.5	mA
receive distance	L	0 °	10	12	-	M
	L	35 °	5	6	-	M
	L	35 °	5	6	-	M
Carrier Frequency	f _o		-	37.9	-	KHZ
BPF BPF width	f _{BW}		-	6	-	KHZ
Low level output	V _{oL}		-	-	250	mV
High level output	V _{oH}		4.5	-	5.0	V
Pulse width	T _{pwl}		400	600	800	us
	T _{PWH}		400	640	800	us
Minimum pulse width	T _{burst}		350	-	-	us
Minimum interval	T _{burst gap}		450	-	-	us
Encoding pause time	T _{pause}		45	-	-	us

* CH3018-12U,

1M 40W


200 ± 50Lux.




Recommended usage conditions

Supply Voltage	VDD	2.7	-	5.5	V
input frequency	FM	-	37.9	-	KHZ
Operating temperature	Topr	-	25	-	C



Application circuit diagram

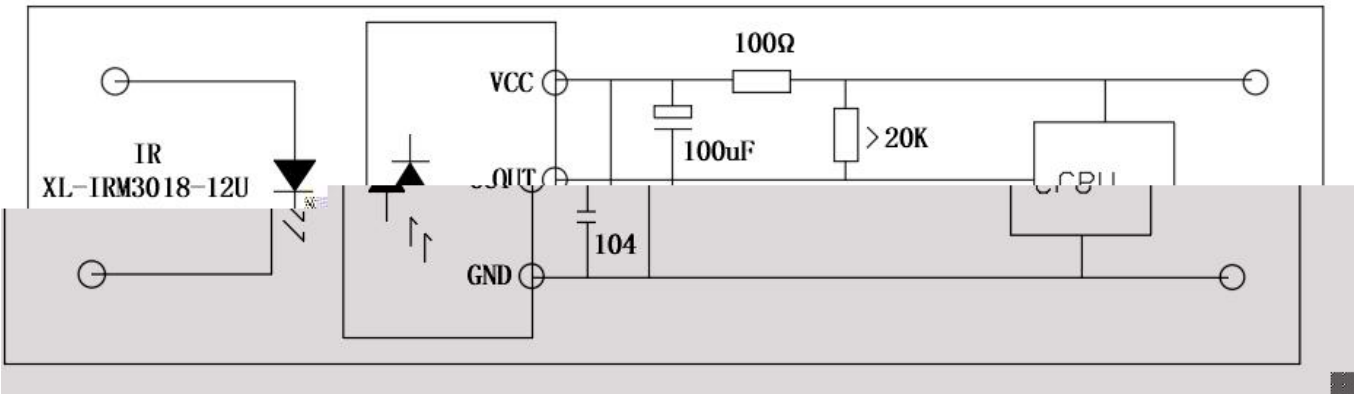

schematic diagram

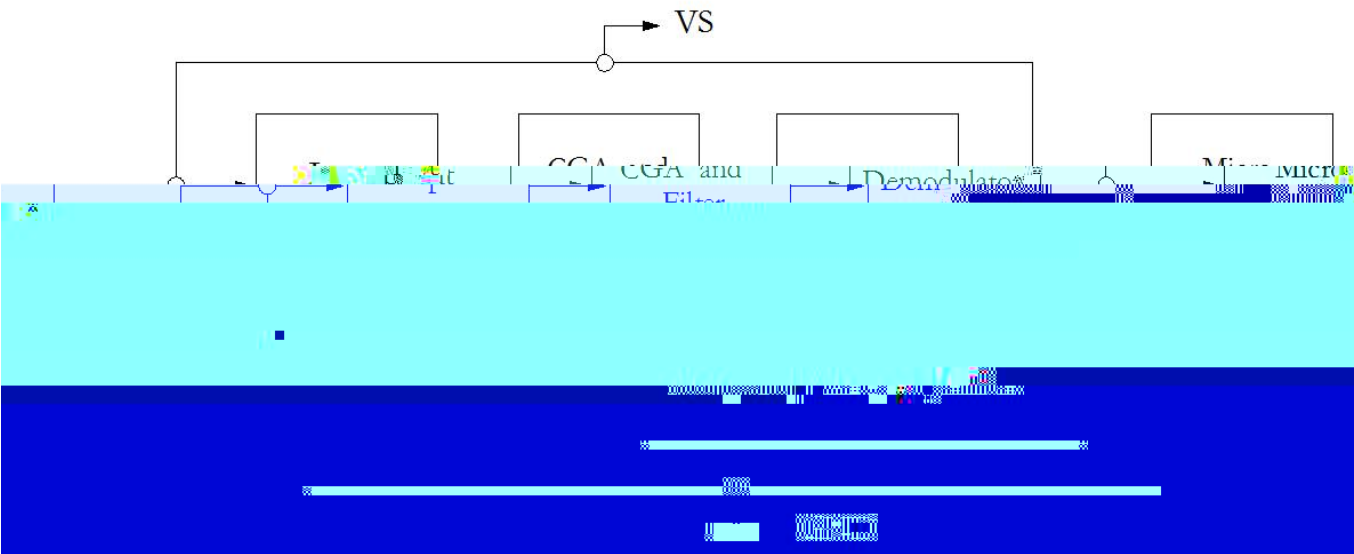

Receiving angle testing method

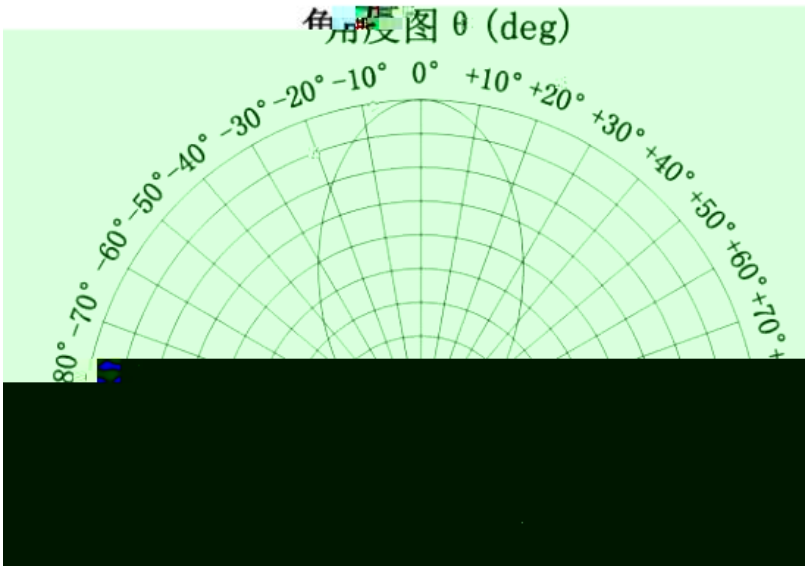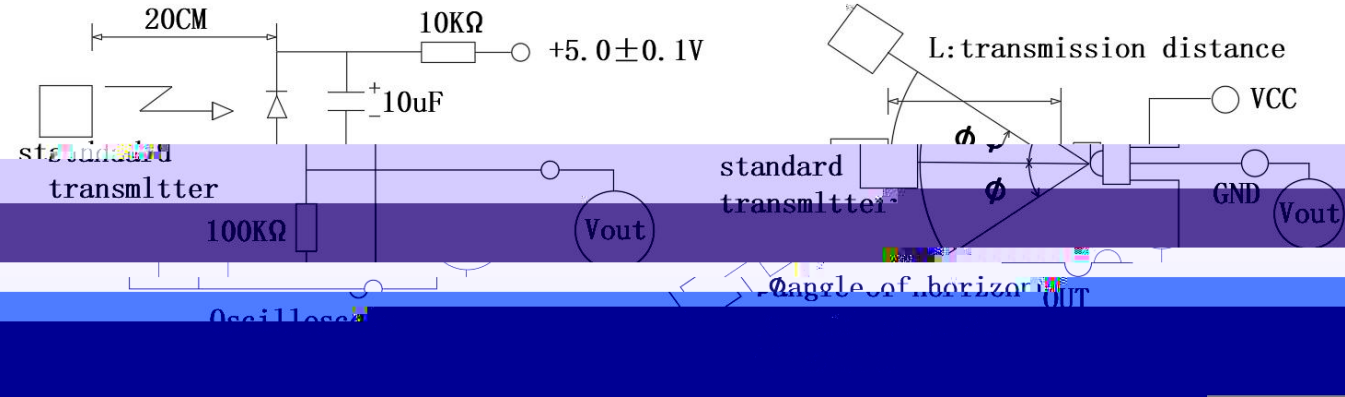

接收距离分档


代码	最小值	最大值	单位	测试条件
L1	6	8	M	ICC=0.5mA
L2	10	15		
L3	15	20		

工作电压分档

代码	最小值	最大值	单位	测试条件
V1	2.5	5.5	V	ICC=0.5mA
V2	2.7	5.5		

工作电流分档

代码	最小值	最大值	单位	测试条件
I1	0.3	0.5	mA	VDD=5V
I2	0.4	0.7		






可靠性试验


Reliability Test Items And Conditions

*

260 ±5	5	20	20
100PF 1.5KΩ , 4KV,		20	20
10-50HZ/1min 1.5mm X Y Z/30min		20	20
85 ±2	240	20	20
	240	20	20




外形尺寸

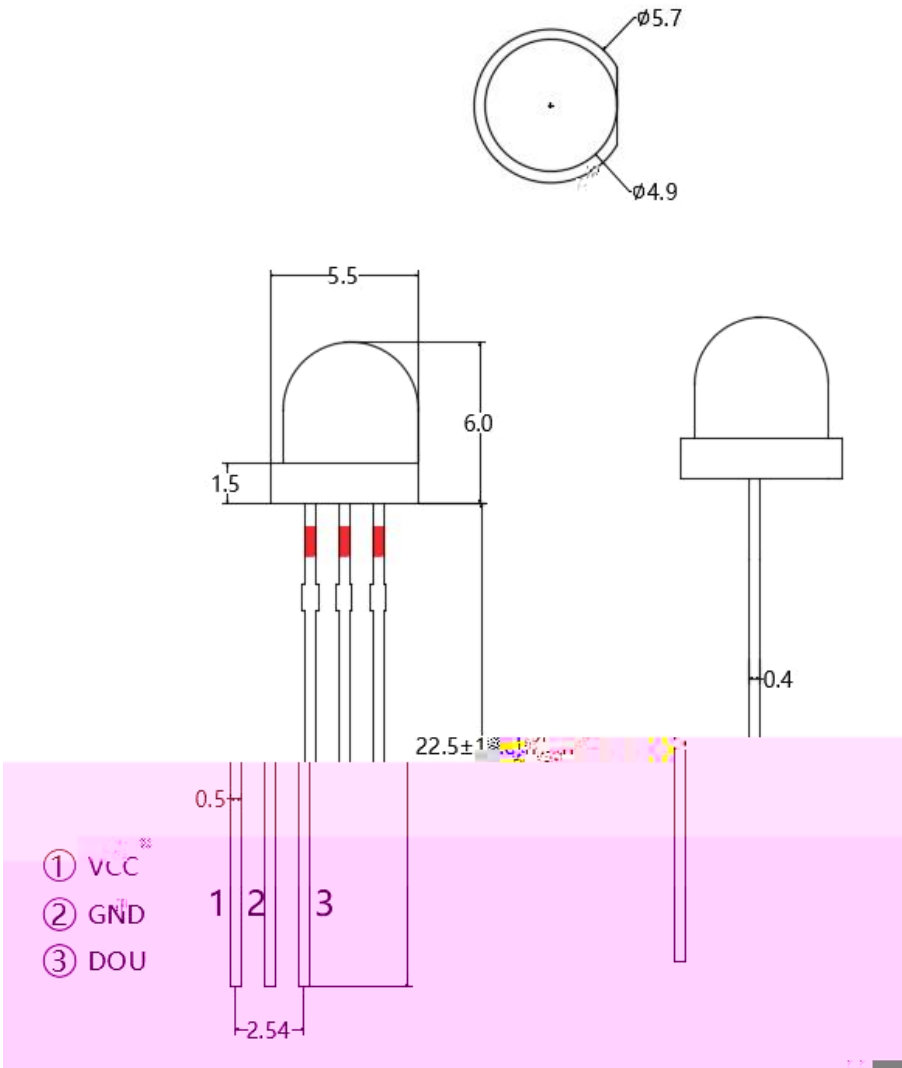


(Note)

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are $\pm 0.25\text{mm}$.






包装

- *
In Bags
- *
Moisture Proof and Anti-Static Foil Bag

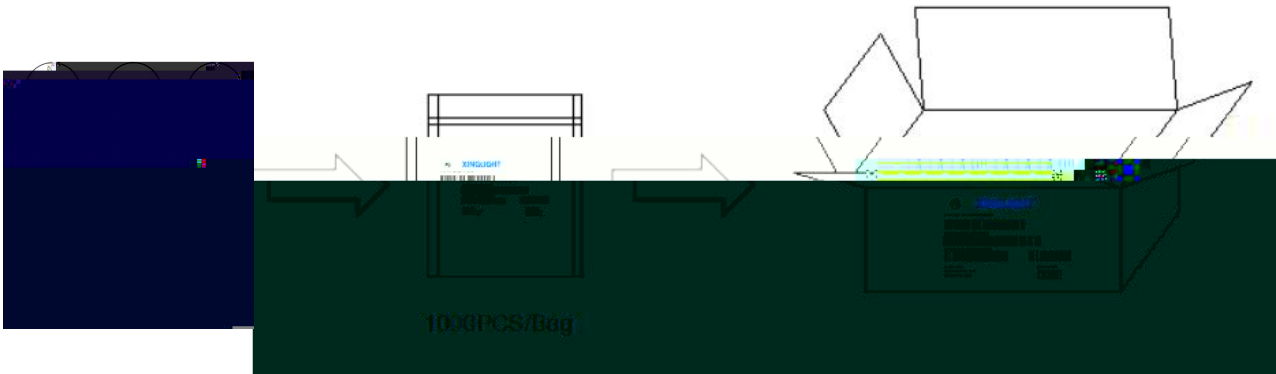

◇ 标签说明 Label Expantion

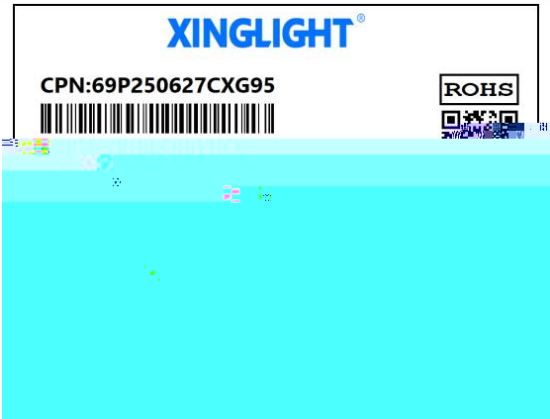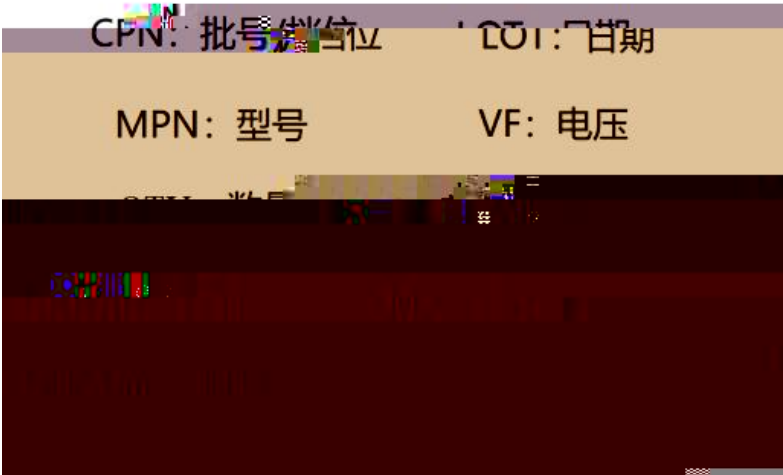

使用注意事項 (1)

1

LED

This Infrared receiver head can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

2

85

70%

Storage environment of Infrared receiver head with temperature not exceeding 30 and relative humidity not exceeding 70%. It is recommended that Infrared receiver head be used in the original box for no more than three months. If longer storage time is required, put it in the drying box and add desiccant or filled with nitrogen.

3

Special care must be taken when cleaning colloids with chemicals, as some chemicals have damage to the colloidal surface and cause fading such as trichloroethylene, propylene, ketone, etc. It can be wiped and soaked with ethanol for no more than 3 minutes at room temperature.

1

2

It must be 2 mm from the colloid to bend the bracket.

2

Support forming must be done with fixtures or by a professional.

3

Support forming must be completed before welding.

4


The pins and spacing are the same as on the circuit board.

5

LED

PCB

Welding must be performed at normal temperature and when Infrared receiver head is normally welded to the PCB plate, avoid applying mechanical pressure at LED pins at a minimum.




使用注意事項 (2)

Precautions (2)

2mm

When welding, welding must be conducted




使用注意事項 (3)

Precautions (3)

9、其他事項：

Do not apply unnecessary external force to the pins of the infrared receiver head Pay attention to protecting the receiving surface of the infrared receiver head Staining can affect reception function



If there are any modifications to the specification sheet, no further notice will be given

