




|        |       |                |        |
|--------|-------|----------------|--------|
|        |       |                |        |
| XL101X | LSOP4 | 3000pcs / Reel | XL101X |
| XL101X | LSOP4 | 3000pcs / Reel | XL101X |

Notes

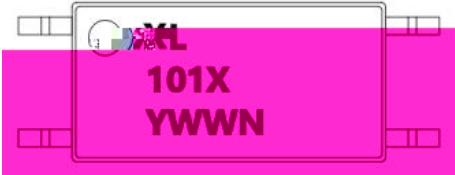

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |






Fig.1 Allowable Forward Current vs. Ambient Temperature

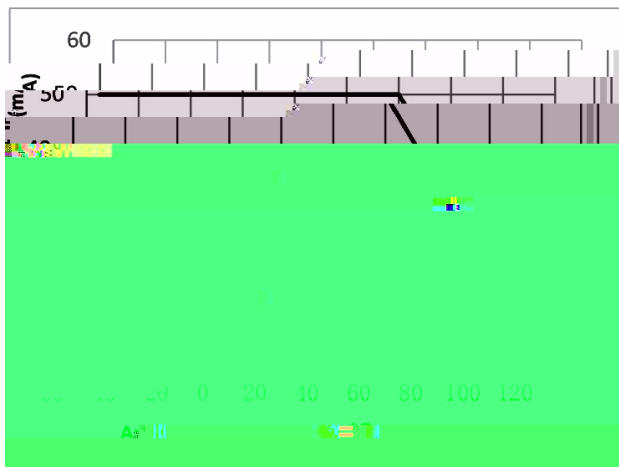


Fig.2 Allowable collector power dissipation vs. Ambient Temperature (°C)

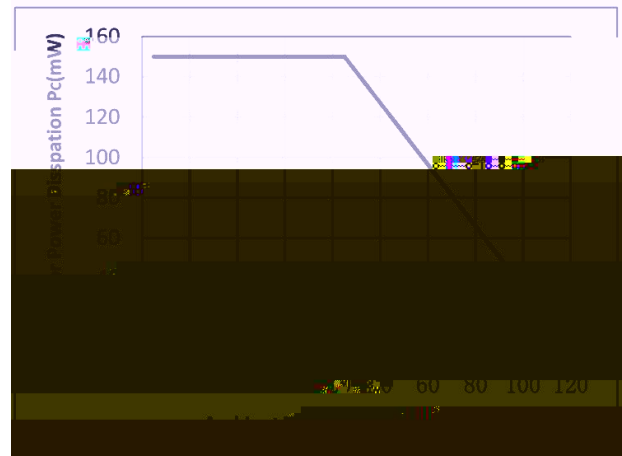


Fig.4 Forward Current vs. Forward Voltage

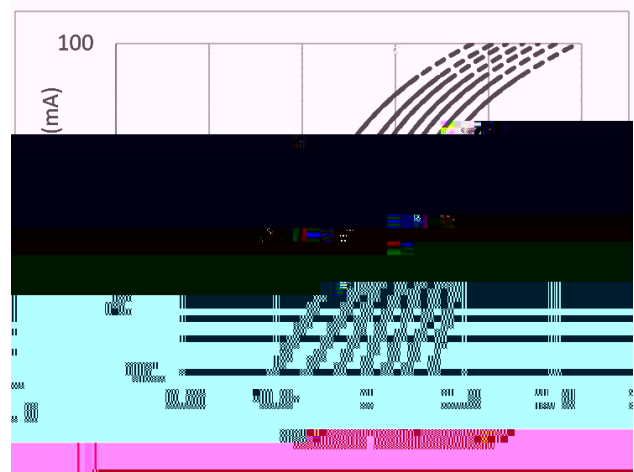


Fig.5 Collector Current vs. Collector-emitter Voltage

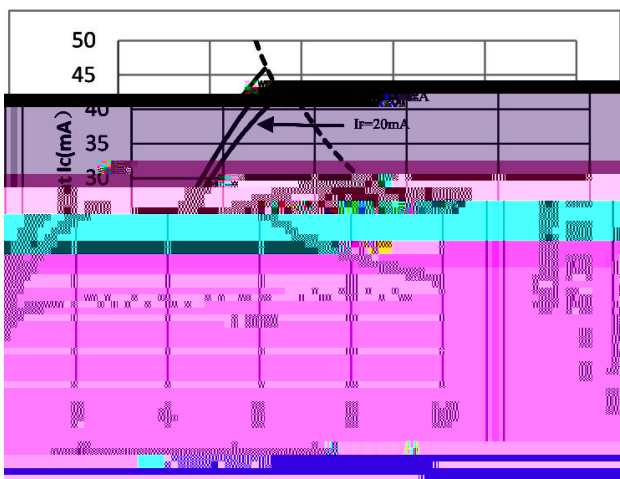


Fig.6 Relative Current Transfer Ratio vs. Ambient Temperature

