目录

电性参数

[redacted]

可靠性实验

[redacted]

包装

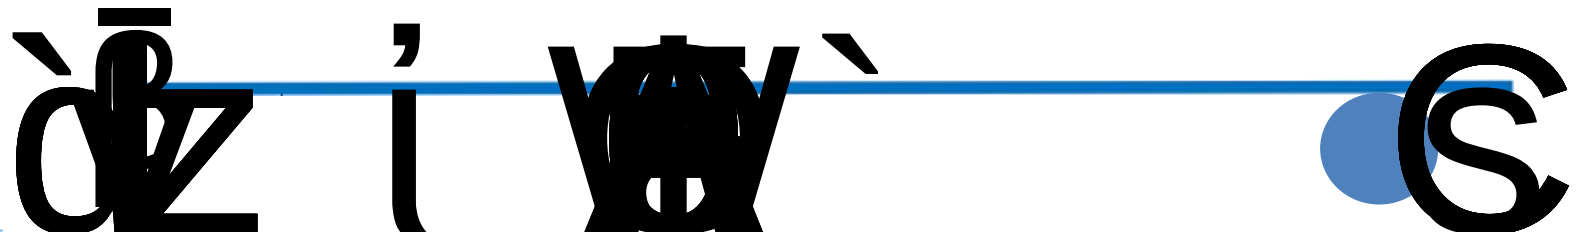

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing tim	ence standard
Endurance test	Working life	Continuous lighting at the maximum rated current at room	1000 -24 -24hours	1000 +72 +7	STD-750D:1026 STD-883D:1005 C 7021:B-1
	High temperature and high humidity	IR-Reflow In-Board, 2 Times Ta= 85±5 , RH= 90 95%	240 ± 2 2hours)	240	STD-202F:103B C 7021:B-11
	High-temperature storage	Ta= 85±5	1000 -24	1000 +72	STD-883D:1008 C 7021:B-10
	Low temperature	Ta= -40±5	-24hours+72		C 7021:B-12
	Cold and hot cycle	105			
Environmental testing					

XINGLIGHT®