

特点 (Characteristics) :

*

*

*

* 典型值 MSL :3

应用领域 (Applications) :

1

2

3

4



电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Parameter	Symbol	Value	Unit
Max Power Dissipation	PD	50	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR		
Storage Temperature Range	TSTR		
/ Lead Soldering Temperature/Time	T*g		

光电参数 Ta=25 Optical-electrical parameter(ta=25)










包装 (1)

Packaging (1)

参考与图例尺寸：

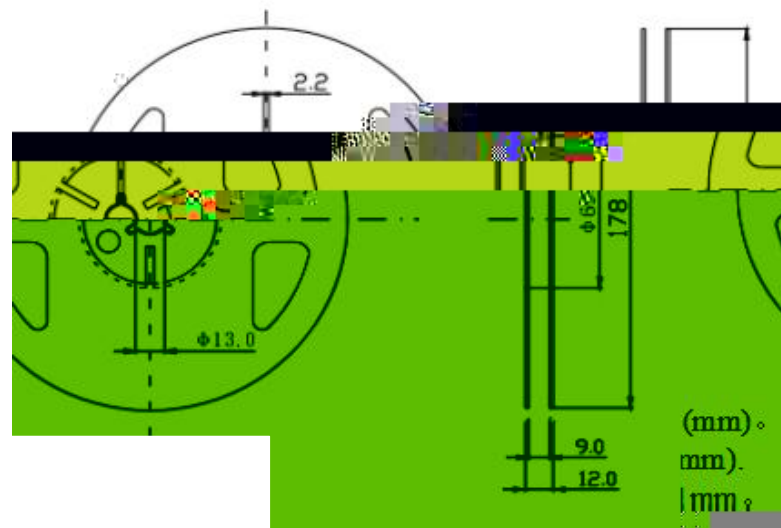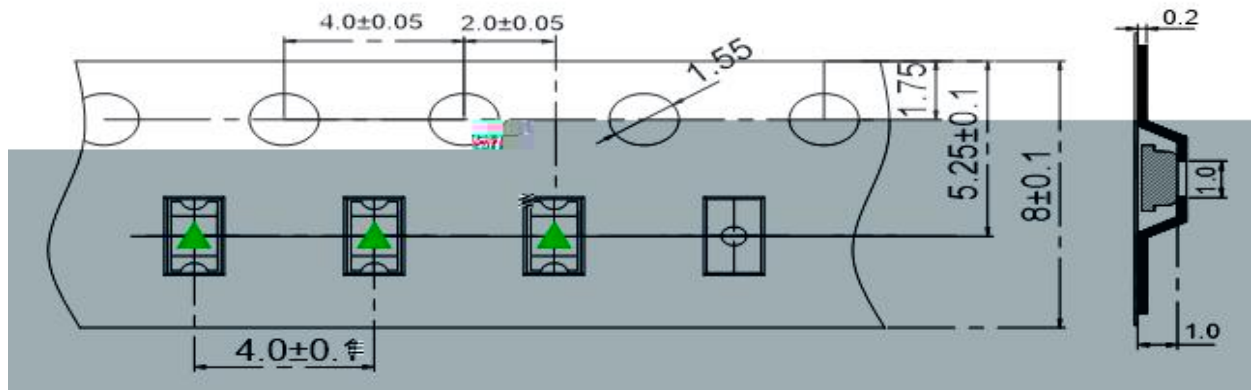

P

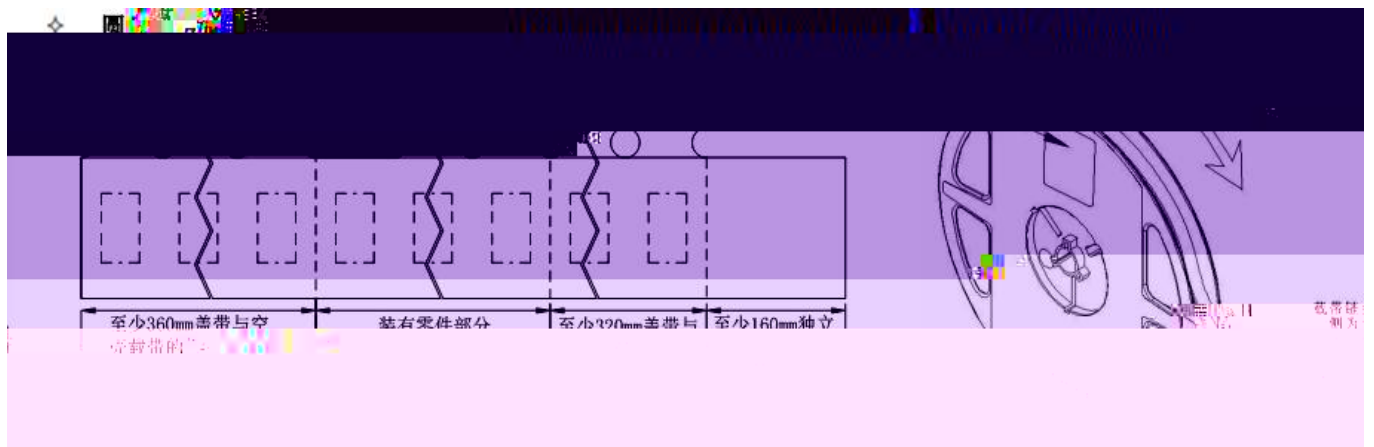


包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antistatic Electrostatic Ion Bag



◇ 外包装箱 Cardboard Box

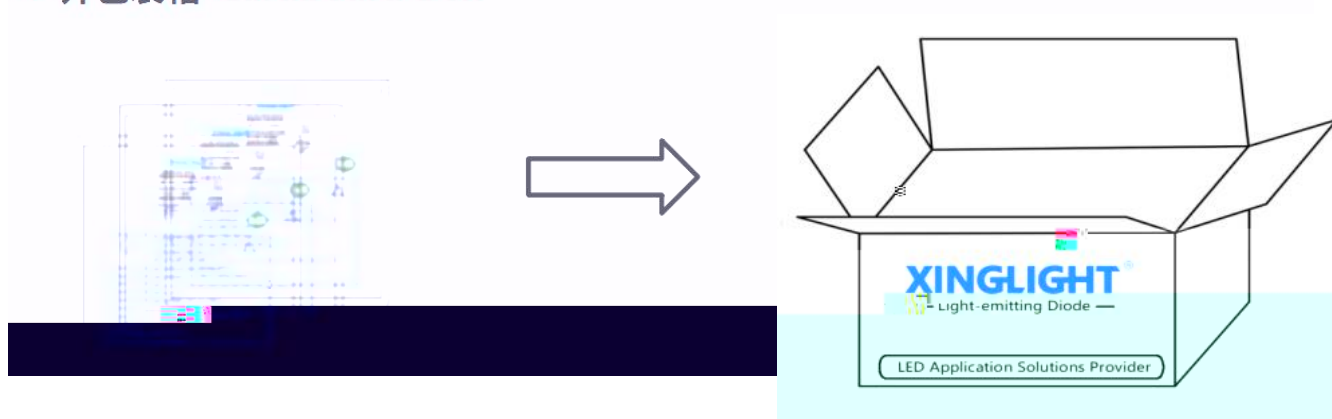

◇ 标签说明 Label Expantion





