



目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指南

电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Parameter		Symbol	Value	Unit
Max		D	200	mW
Continuous Forward Current				mA
Peak Forward Current		IFP	120	mA
Reverse Voltage			5	V
Antistatic ability		ESD	2000	V
Operating	Range		-40 ~ +85	C
Storage Temperature Range			-40 ~ +85	C
/	Lead	Temperature/Time	240-250 10S	/S
* ≤0.1ms		w ċ		

光申参数

Ta=25 Optical-electrical parameter(ta=25)










包装（1）

Packaging (1)

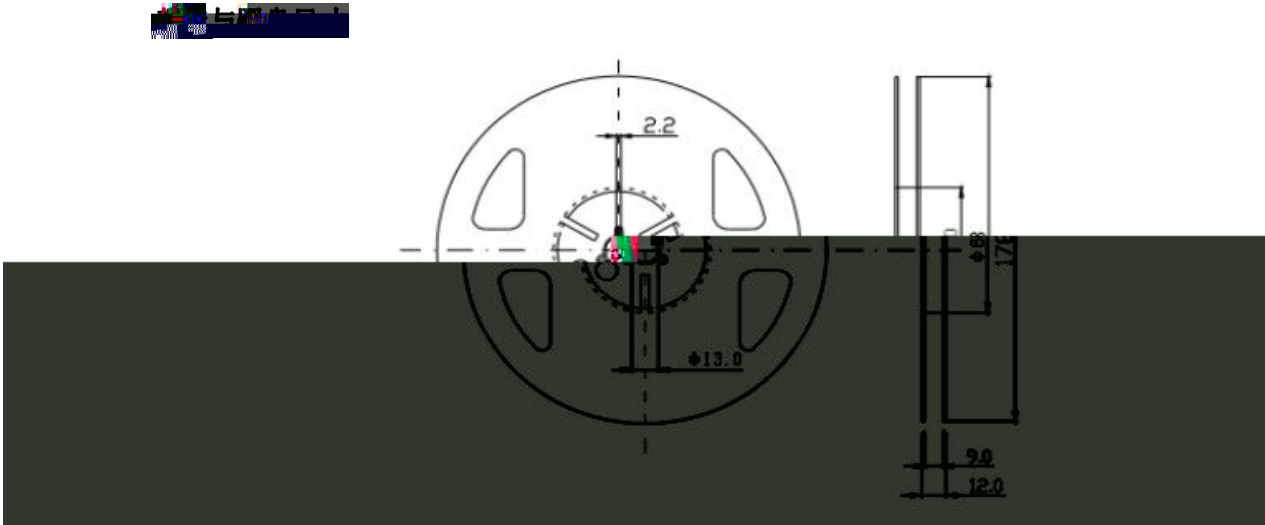

- :
1. (mm)
 1. Size unit is mm (mm).
 2. 0.1mm
 2. The dimensional







Ç

Ç

=

f

,

d

B

B0








使用注意事项 (3)

Precautions (3)



When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die leakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the temperature is high. **Do not use a soldering iron to solder the LEDs.**



LED

γ