2214 白光

特点（C ）：

* L/W/H :2.2*1.4*1.35mm

Out line Dimensions (L / w / h): 2.2*1.4*1.35mm

* : /

Luminous color and colloid: White light/ yellow colloid

* ROHS

Environmental protection products Complied With ROHS Directive

* MSL :3

Moisture sensitivity level MSL : 3 levels

* EIA

EIA standard packaging

* SMT

Suitable for SMT automatic production

*

Suitable for infrared reflow soldering process

应用领域（P ）：

*

Commercial lighting display

*

Car interior lighting

*

Indoor lighting

advertising words, advertising light boxes

*LCD LCD backlight

*

Decorative lighting: flexible light strip

典型特性曲线

Typical Characteristics Curves

光谱分布曲线
Relative Spectral Distrbution

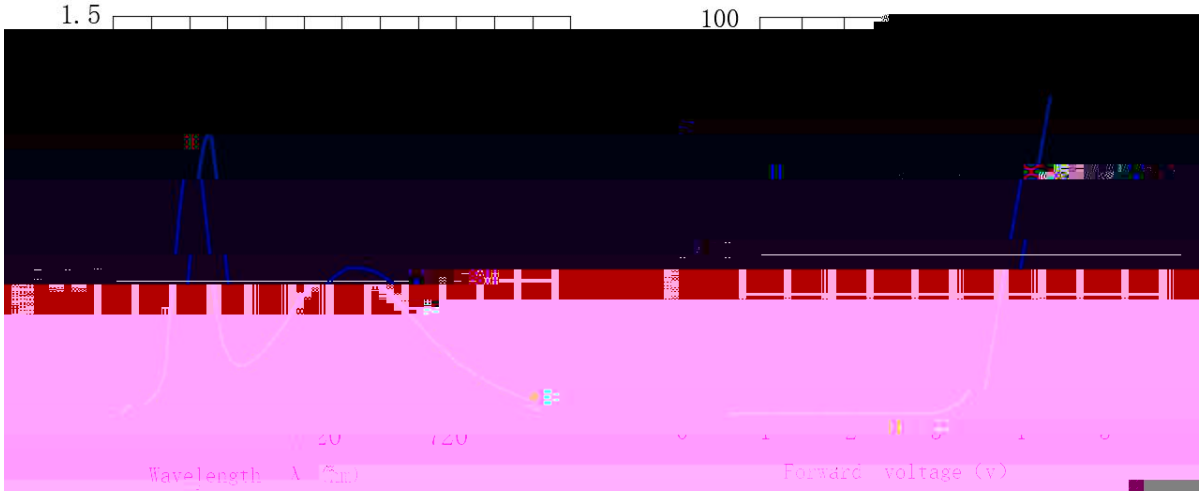

伏安特性
Volt ampere characteristic

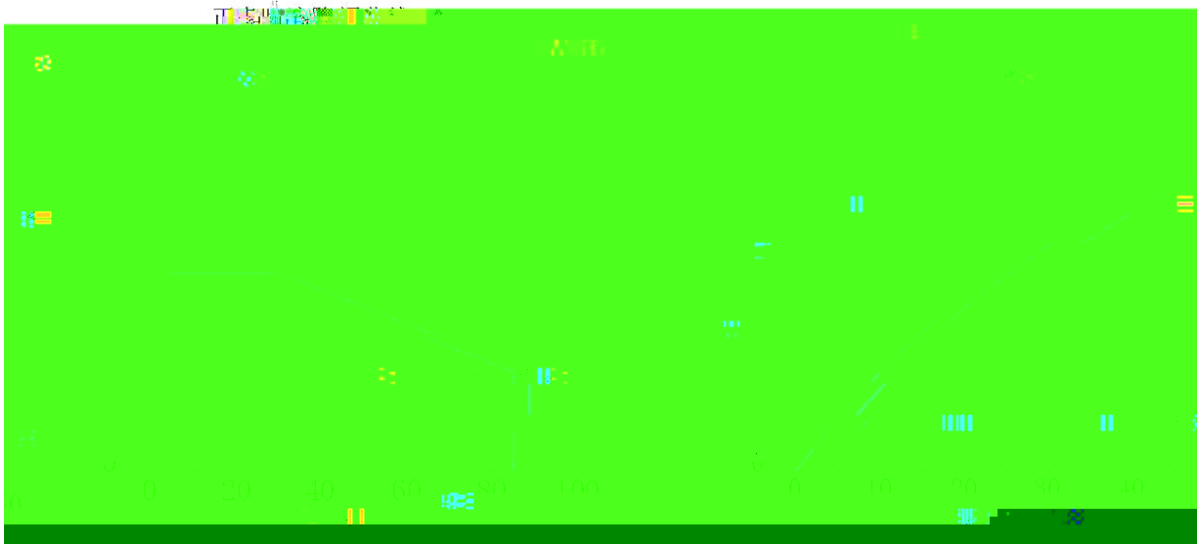

相对辐射强度与空间

25 ± 5 /Note If not otherwise indicated the test environment temp erature is 25 ± 5

外形尺寸

Outline Dimension

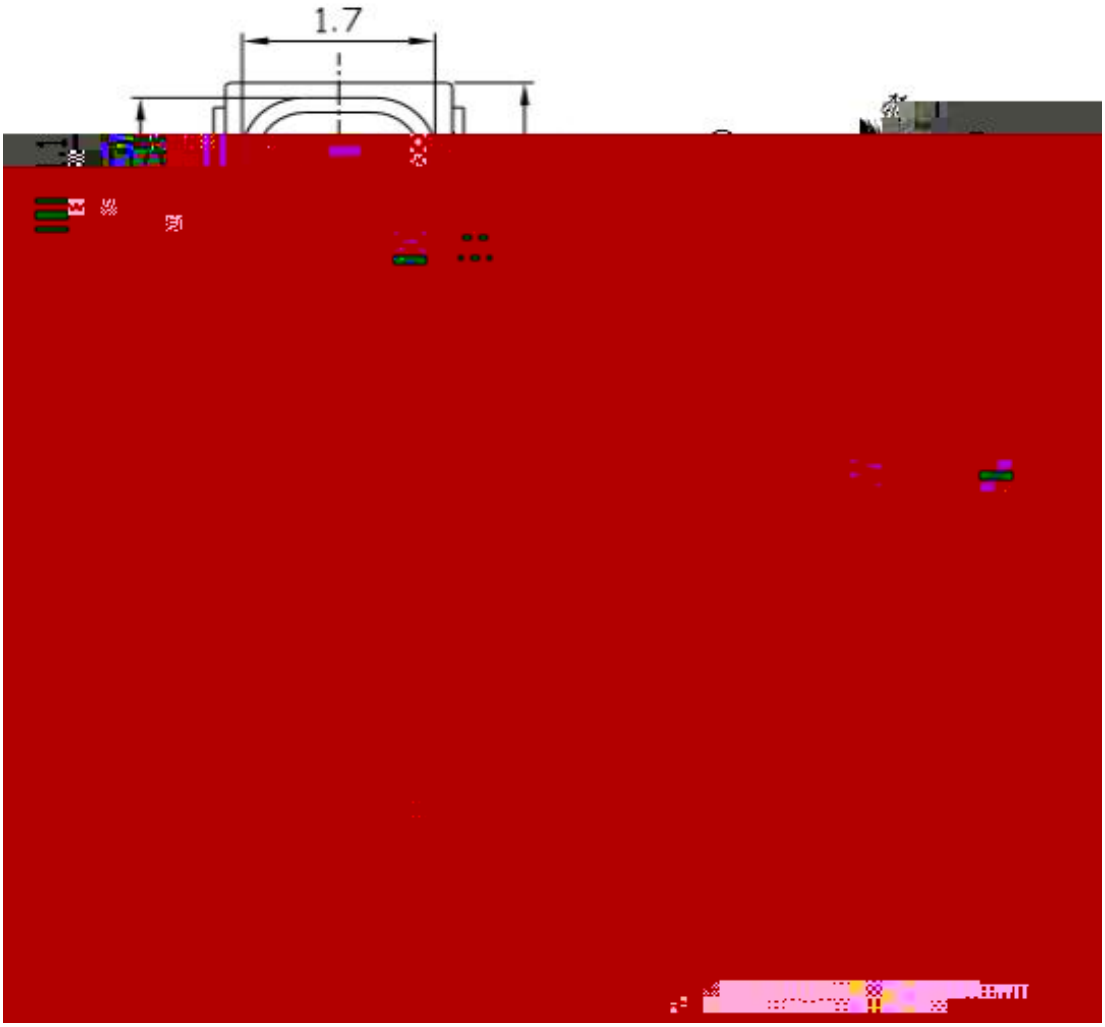

Remarks:

1. 单位为mm
   All dimensions are in millimeters.

2. 公差为±0.25mm
   Tolerance is ±0.25mm unless otherwise noted

包装（1）

Packaging (1)

载带

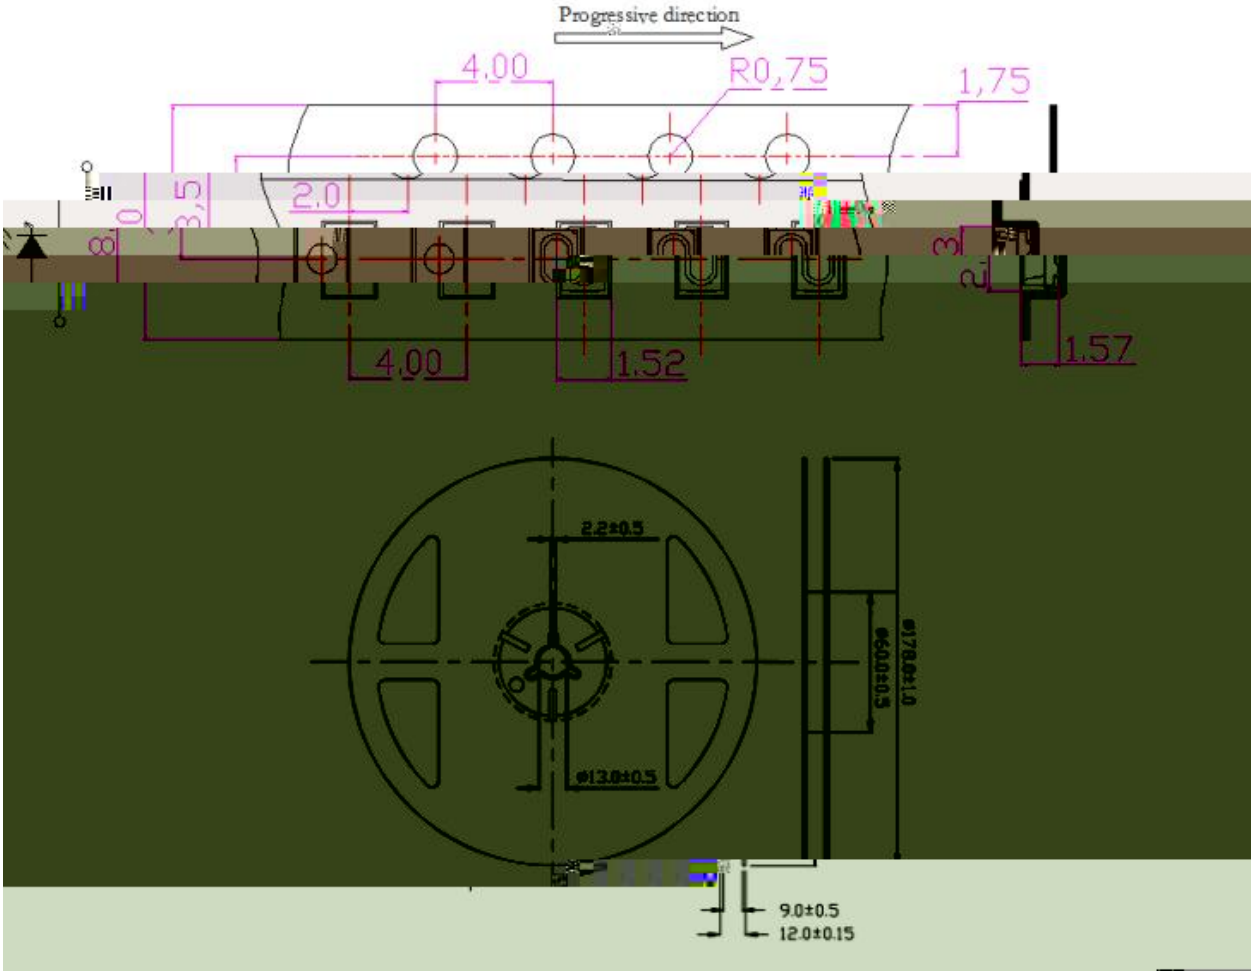

:

1. (mm)

1. Size unit is mm (mm).

2. ±0.1mm

2. The dimensional tolerance is ± 0.1mm.

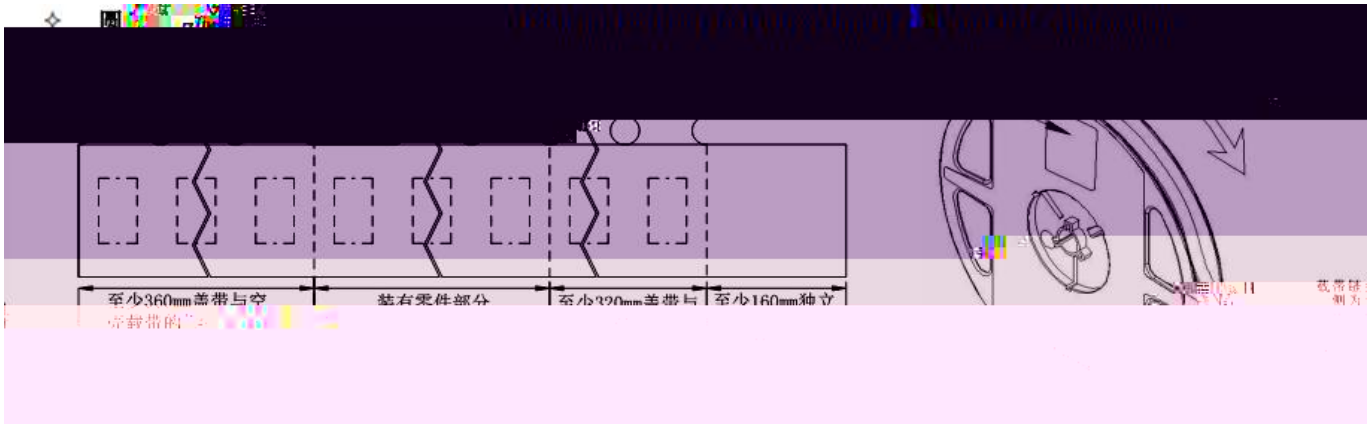

焊接指导（2）

Guideline for Soldering (2)

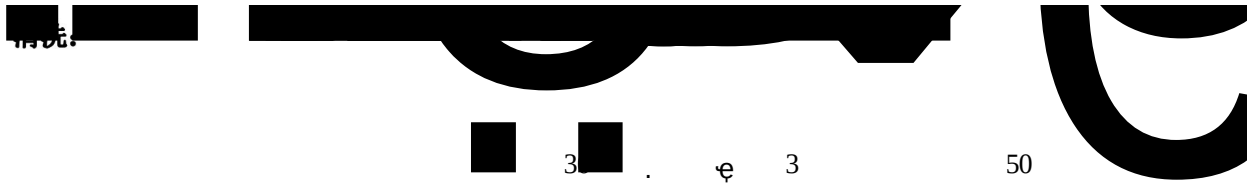

30

LED

LED

It is recommended tha