



目录

电性参数

典型特性曲线




亮度分佈



WUJIA

典型特性曲线

Typical Characteristics Curves

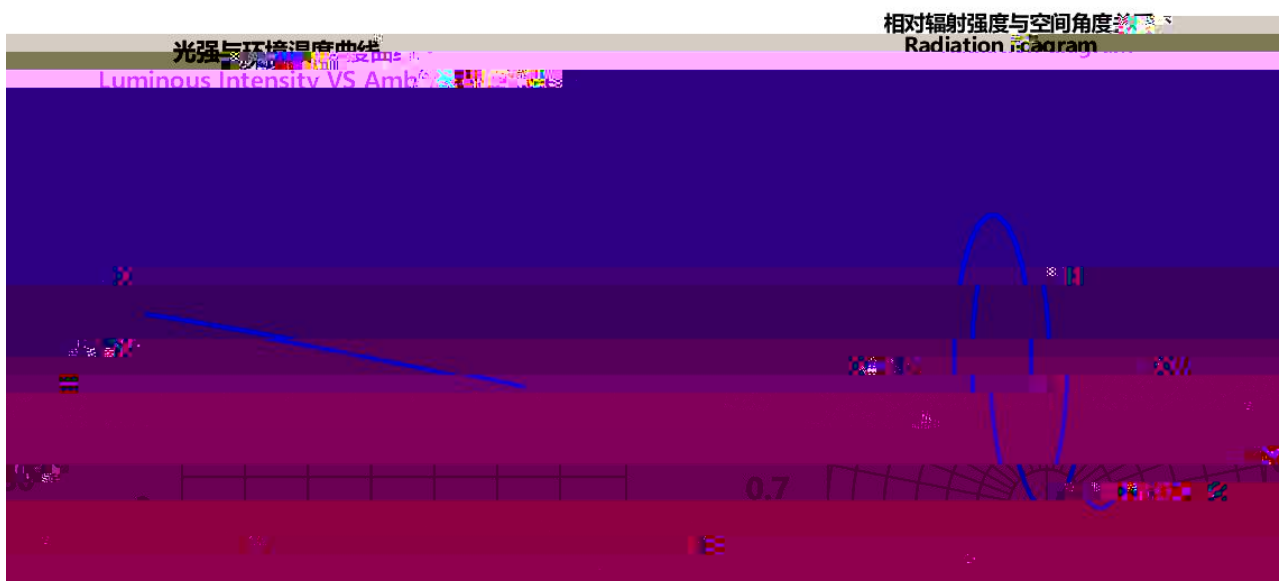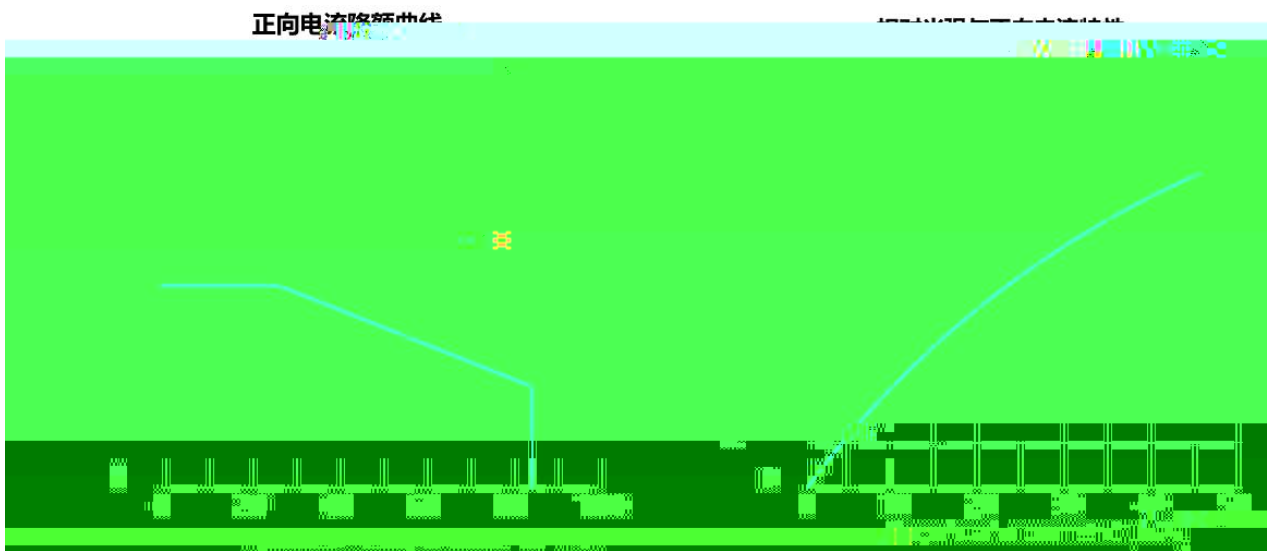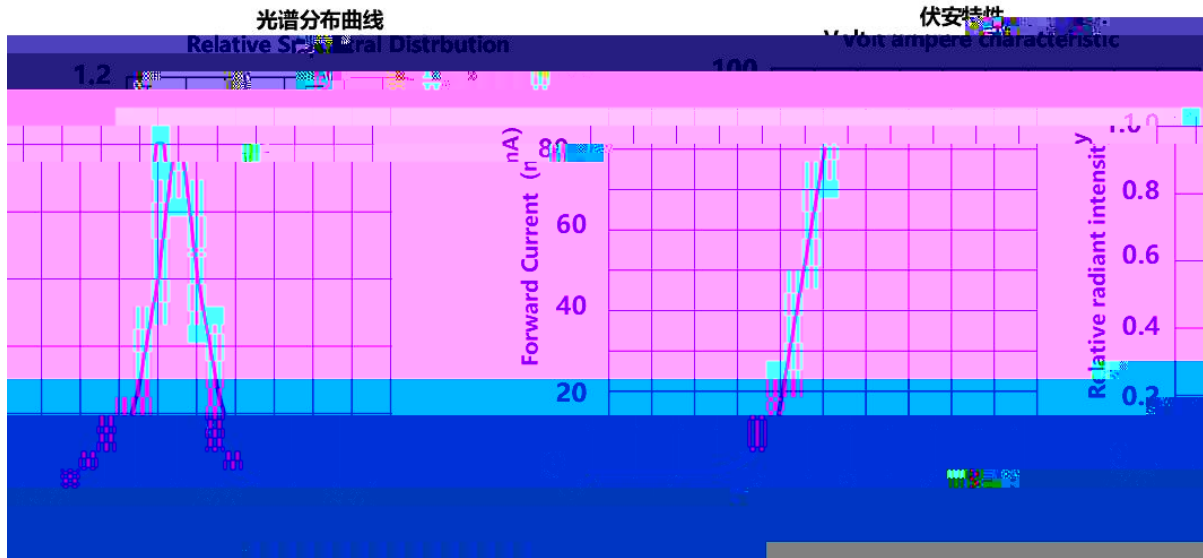

25 5 /Note If not otherwise indicated the test environment temperature is 25 5










包装 (2)


Packaging (2)

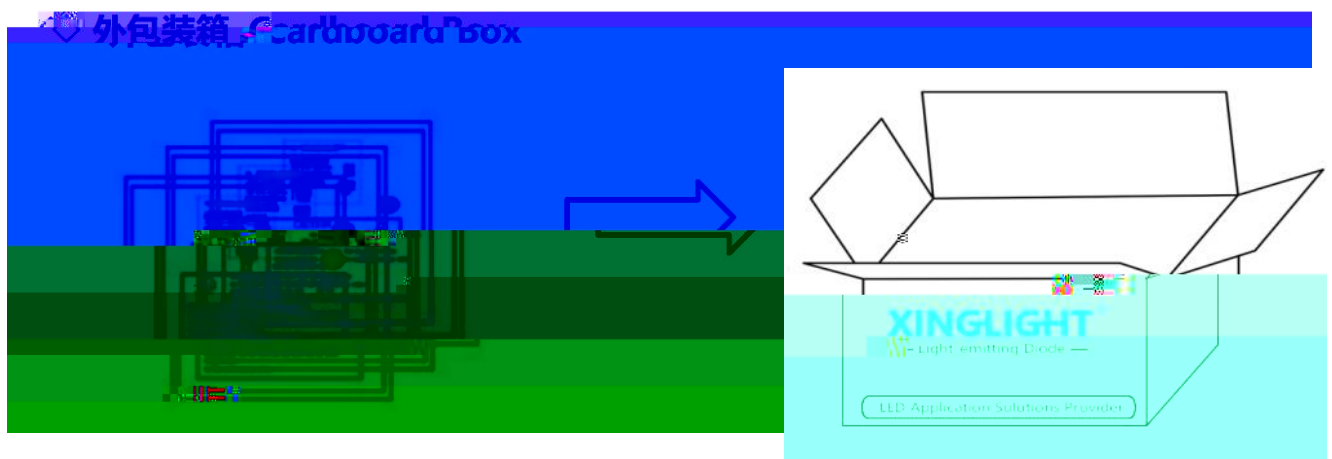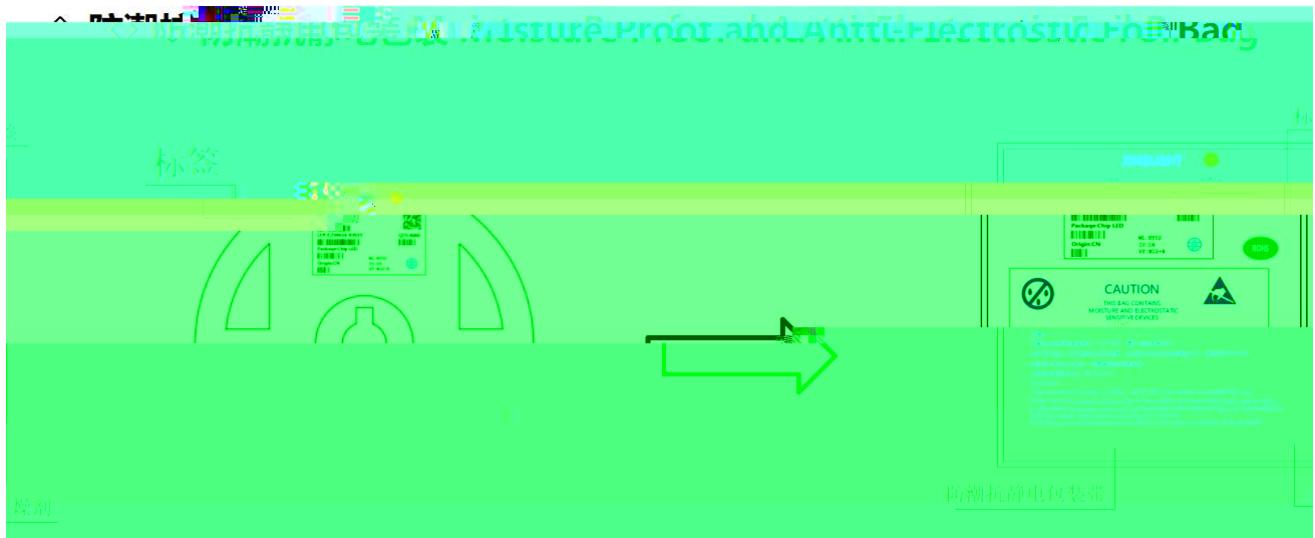

◇ 标签说明 Label Expansion

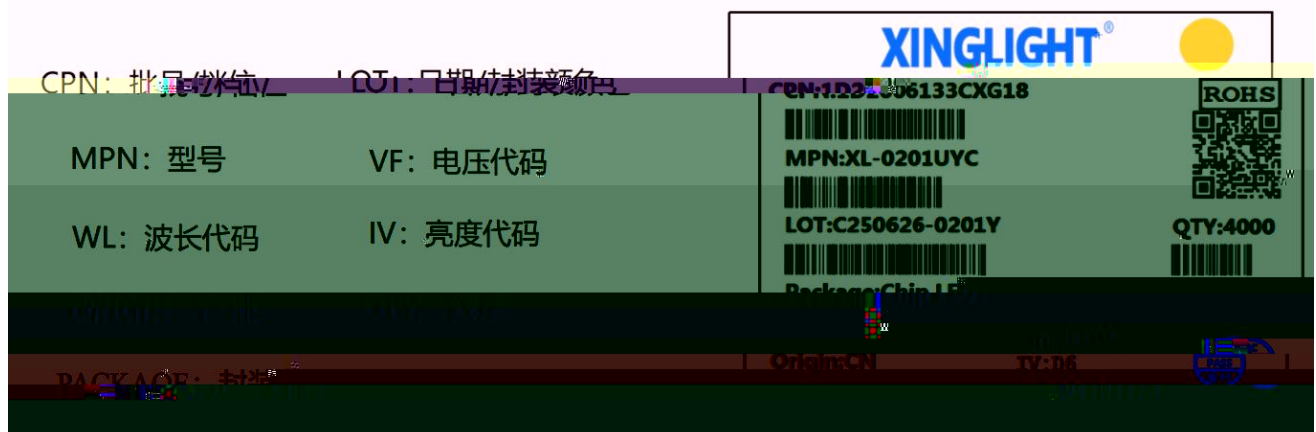




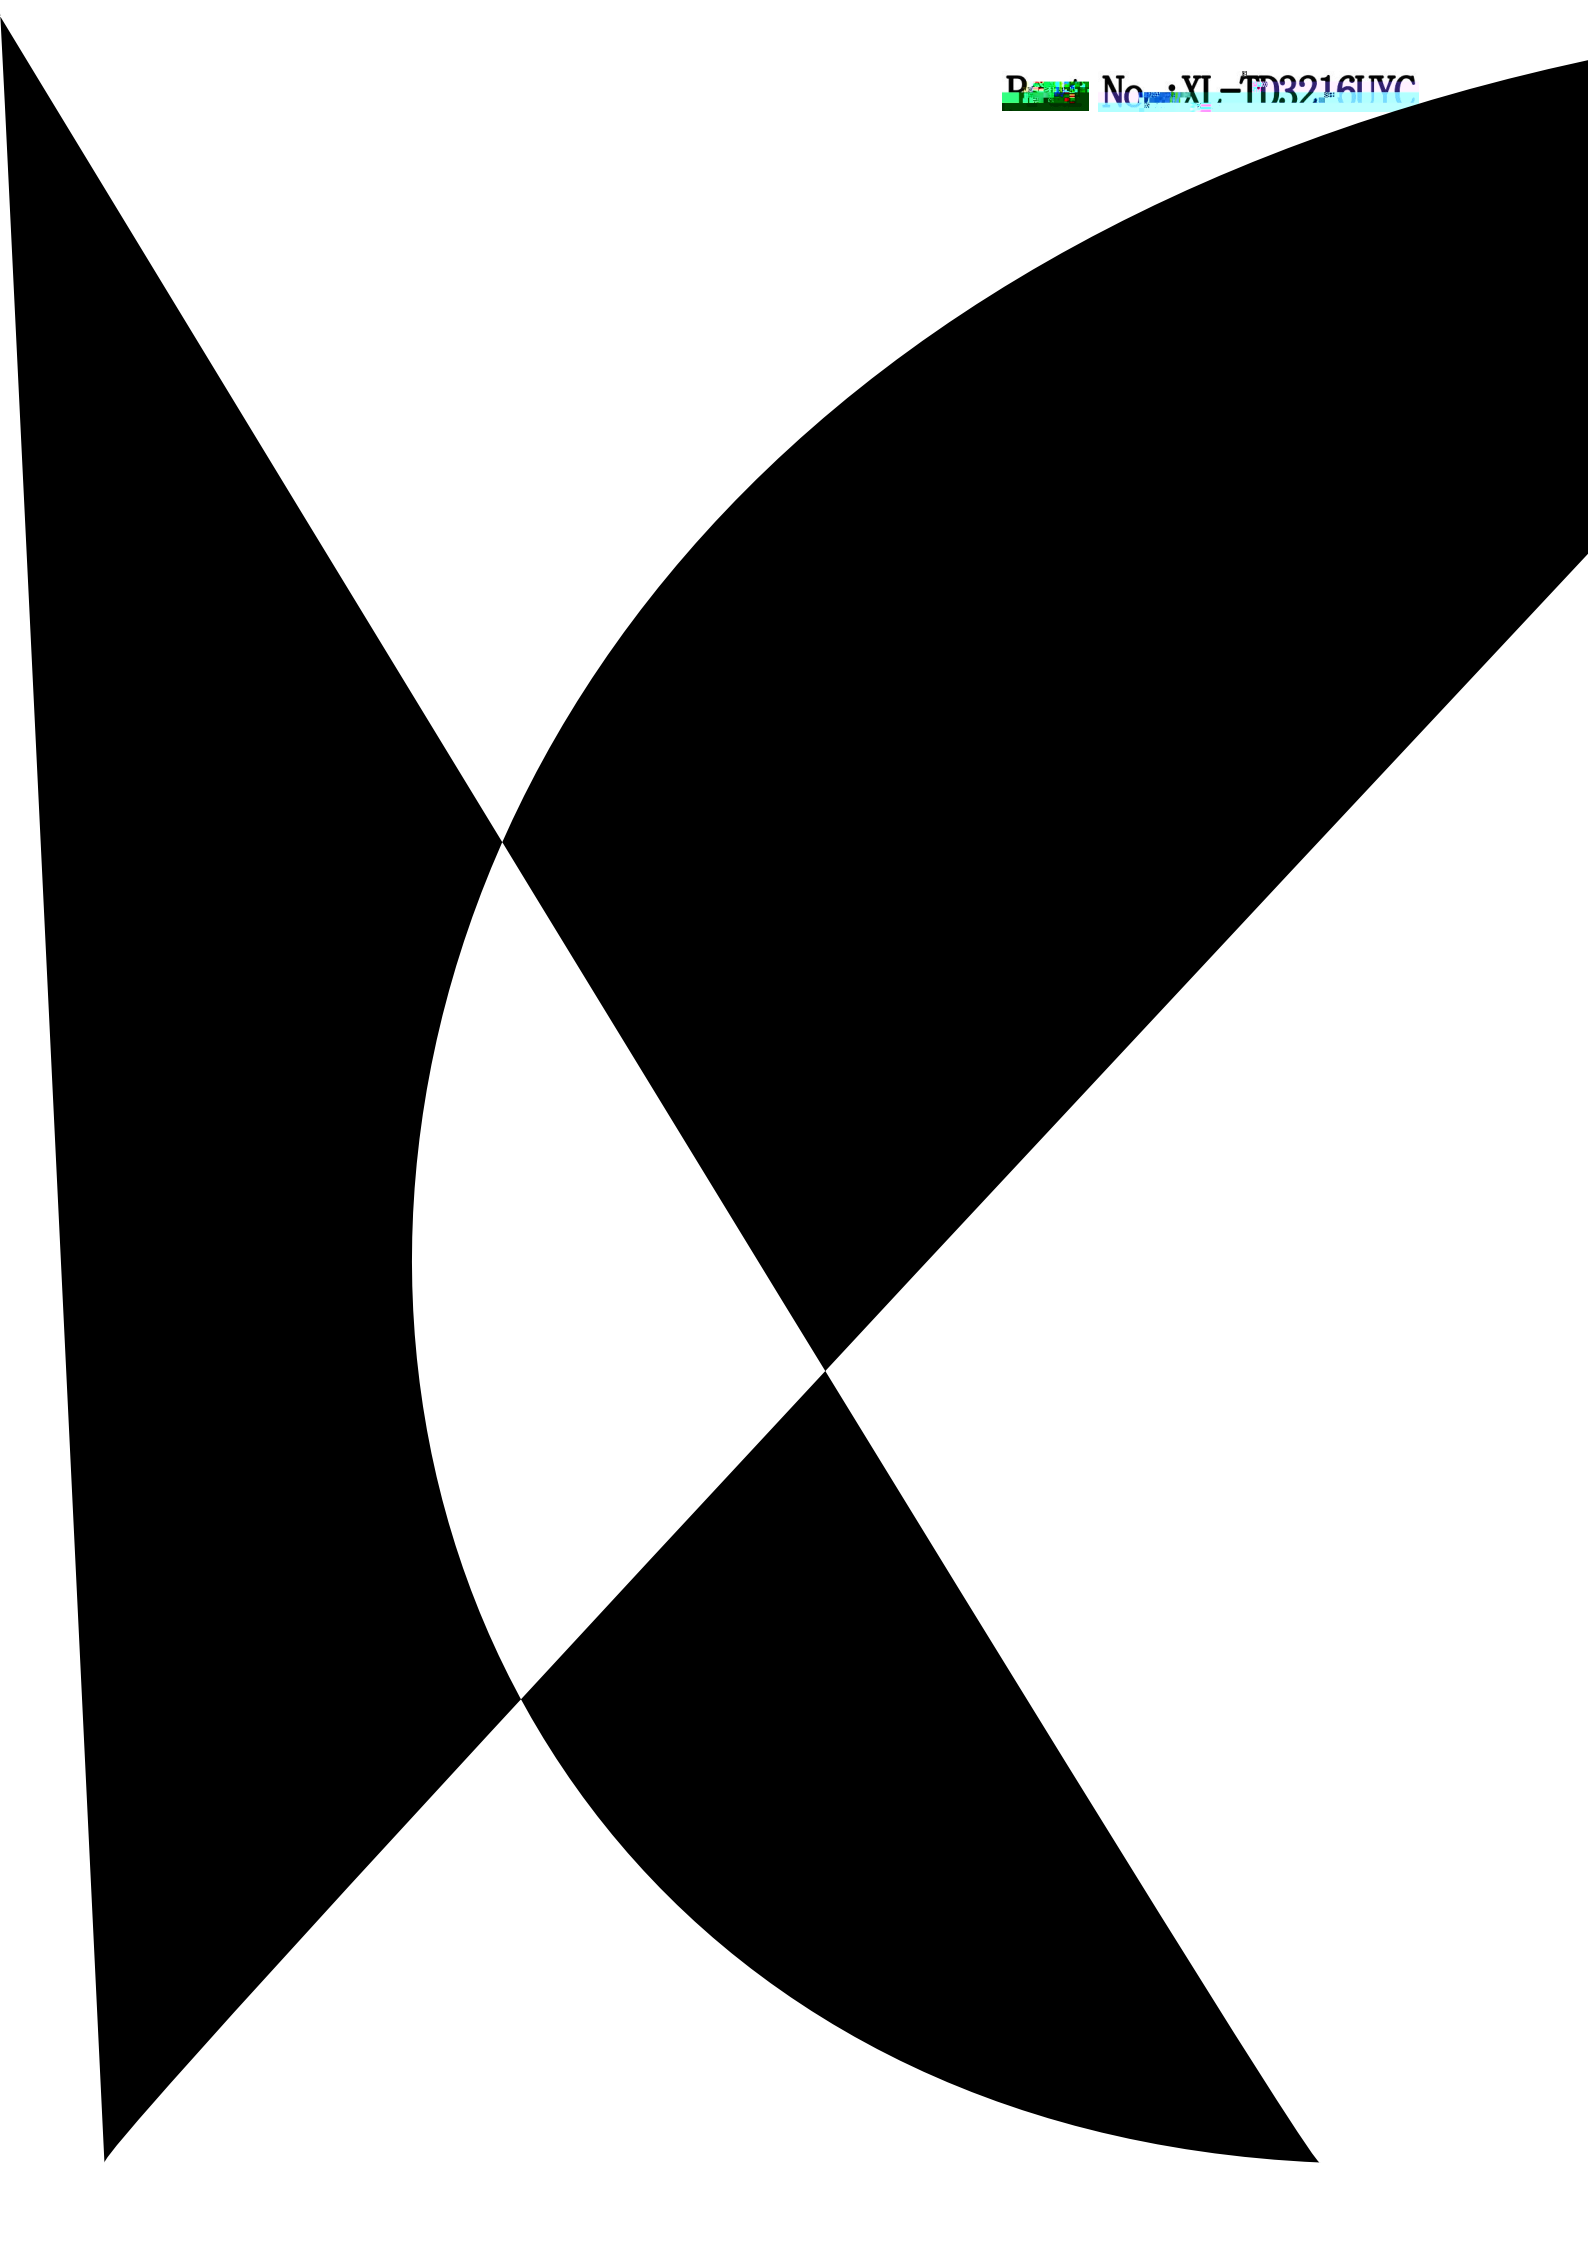

使用注意事项 (2)


Precautions (2)

设计建议

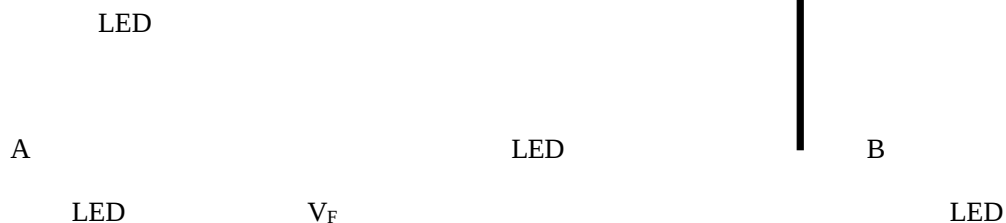

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current through the LEDs may vary due to the variation in Forward Voltage (V_F) of the LEDs. In the worst case, some LED may be subjected to stresses in excess of the Absolute Maximum Rating.

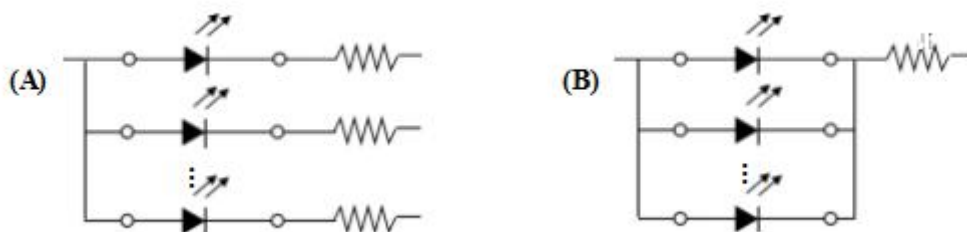

LED

LED

Ther |

