

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项



典型特性曲线

Typical Characteristics Curves








XINLIGHT®

Don't miss the chance to win a free trip to the XINLIGHT®

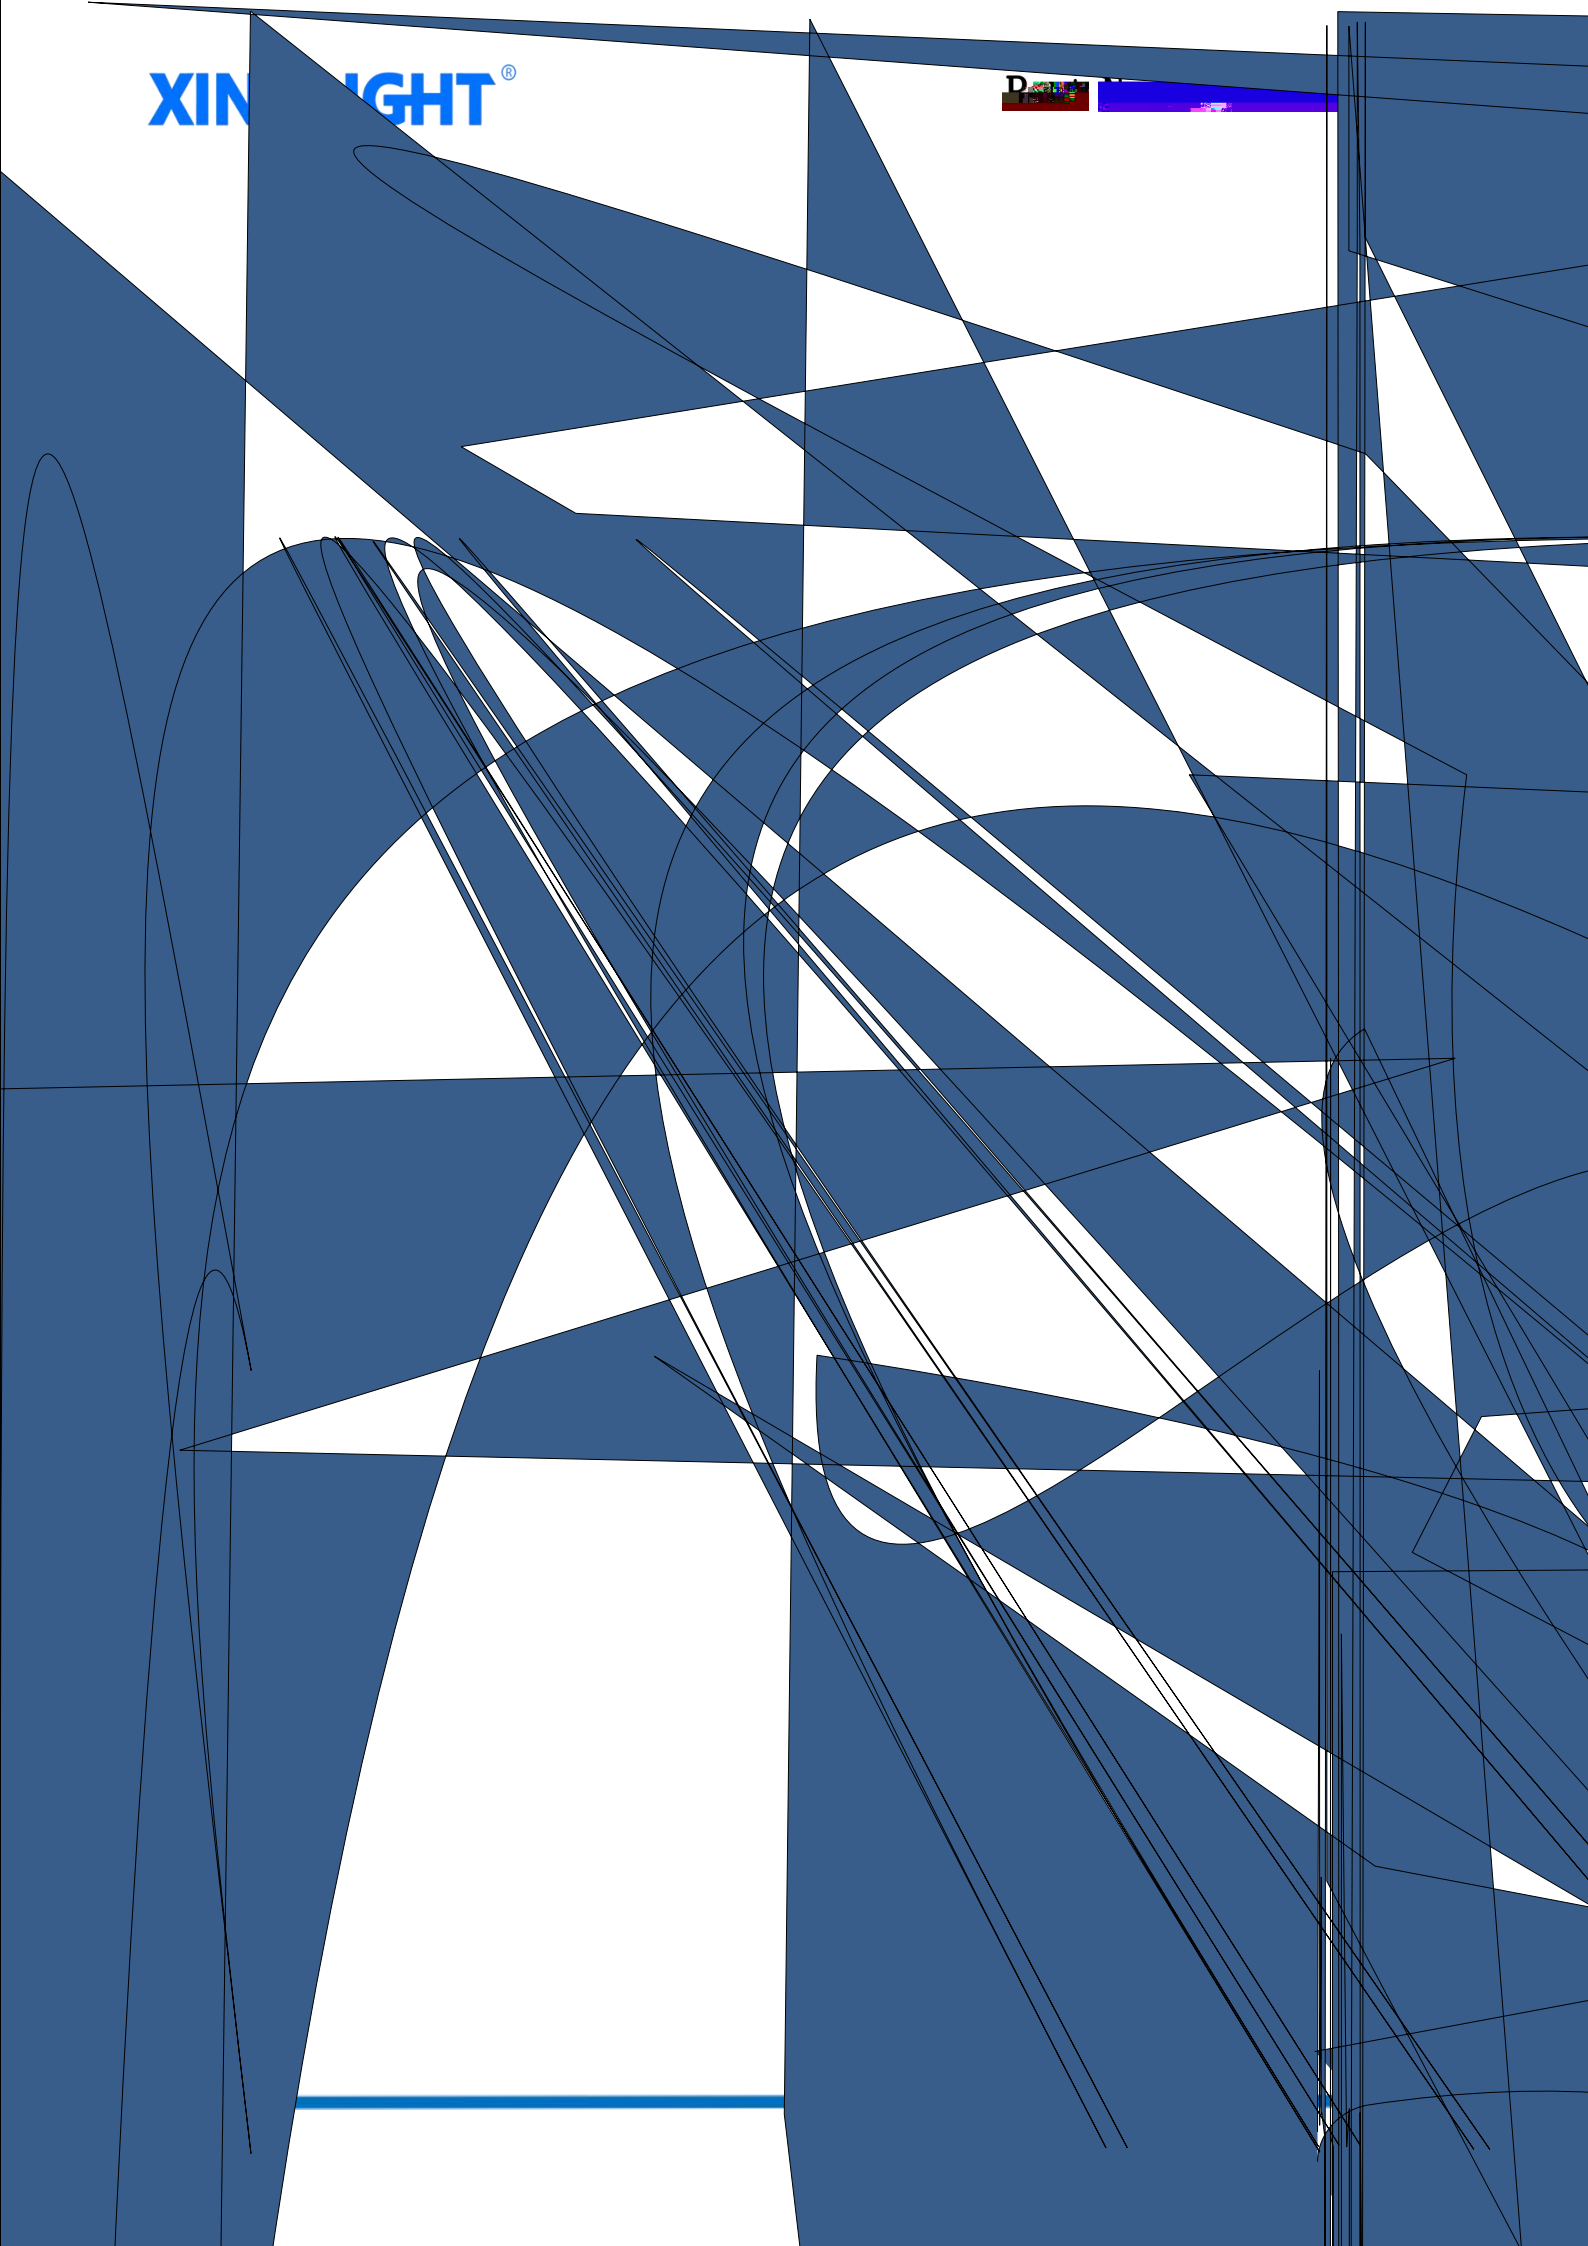



使用注意事项（2）

Precautions (2)

设计建议

LED

A

LED

B

LED

$\frac{V_F}{6}$

LED

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current through the LEDs may vary due to the

O

f qp

I "

VIEWED OF A. B 9

D

¢

\ B

qp6

t

