



目录

电性参数

典型值与曲线

可靠性实验

外形尺寸

包装

焊接指导


使用注意事项

电性参数


Example operation



Consumed power	Pd	R	50	mW
		G	70	
		B	70	






0%T

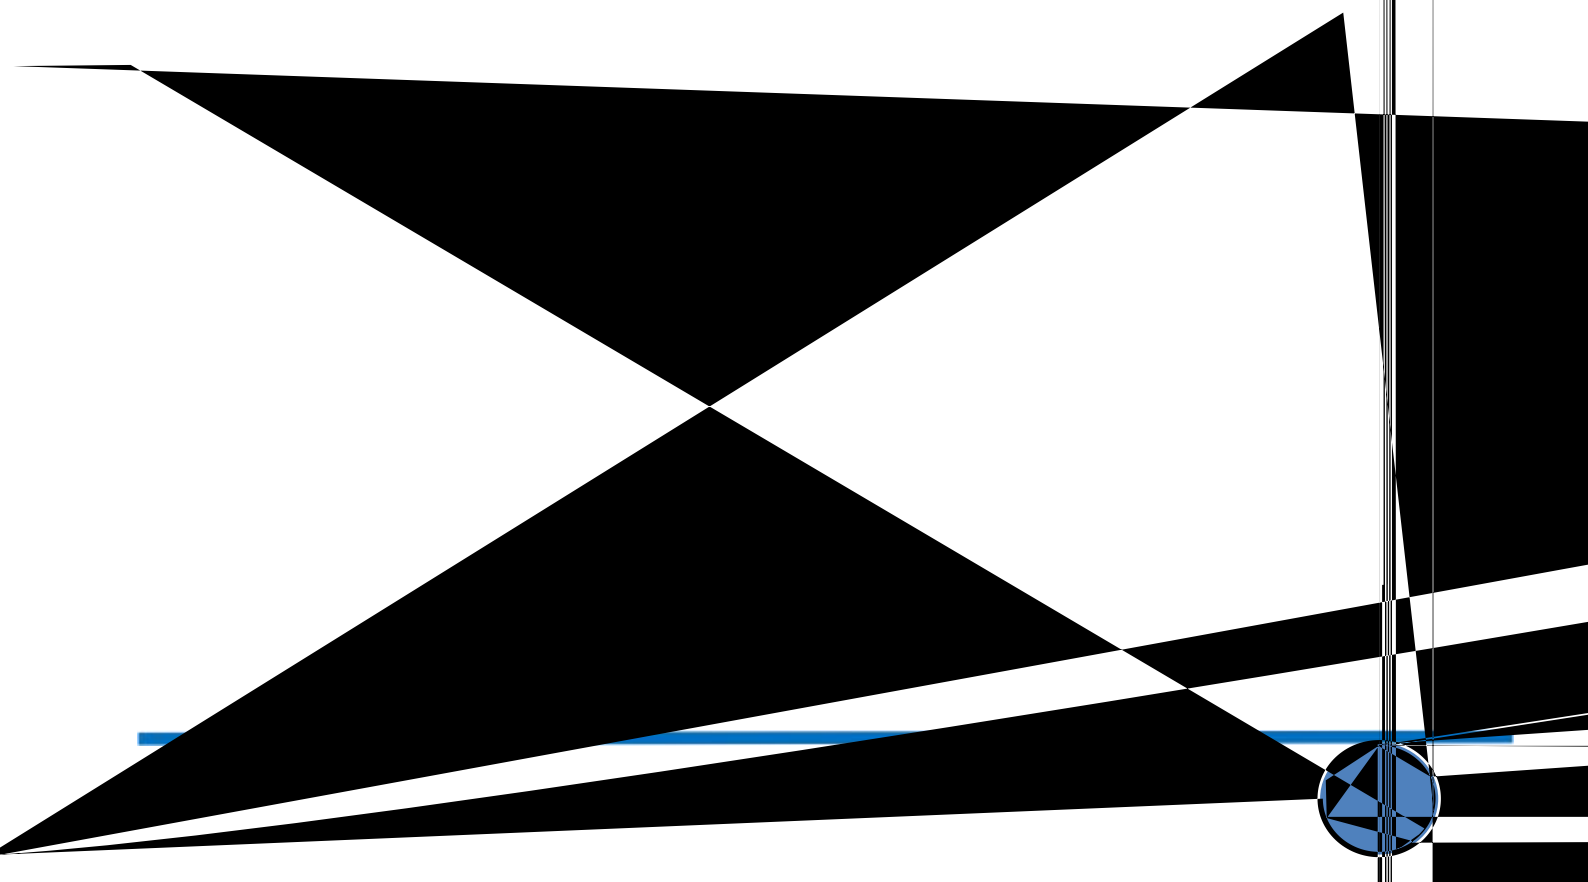



典型特性曲线

Typical Characteristics Curves

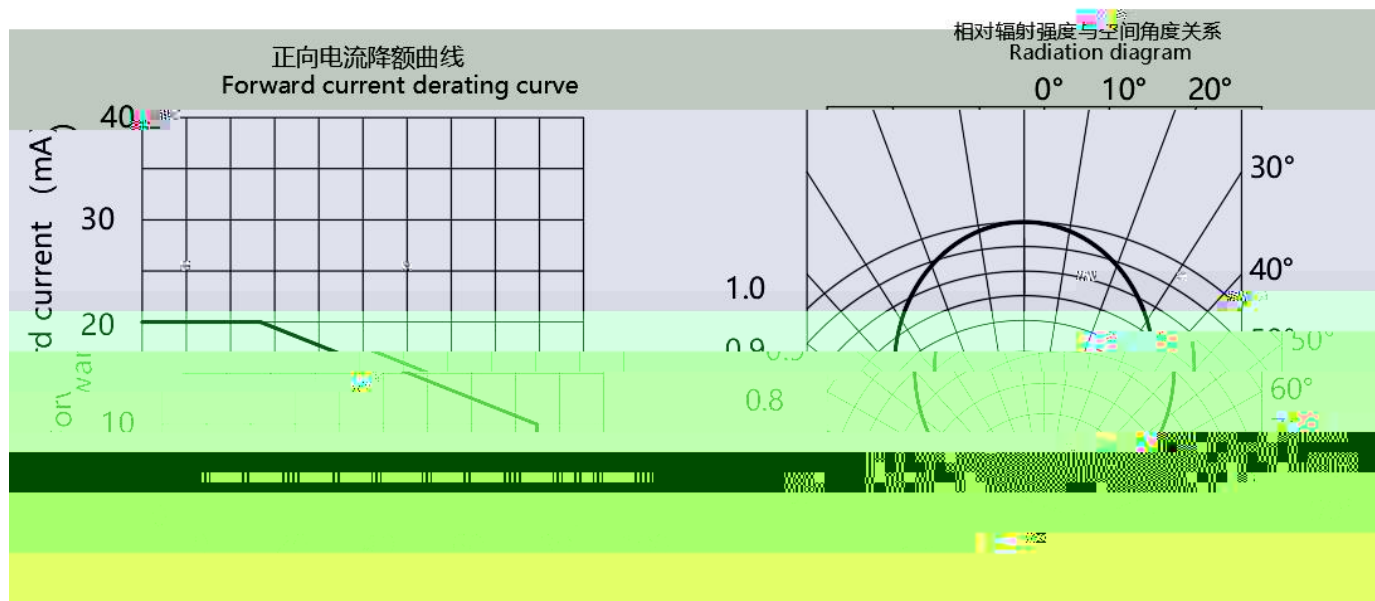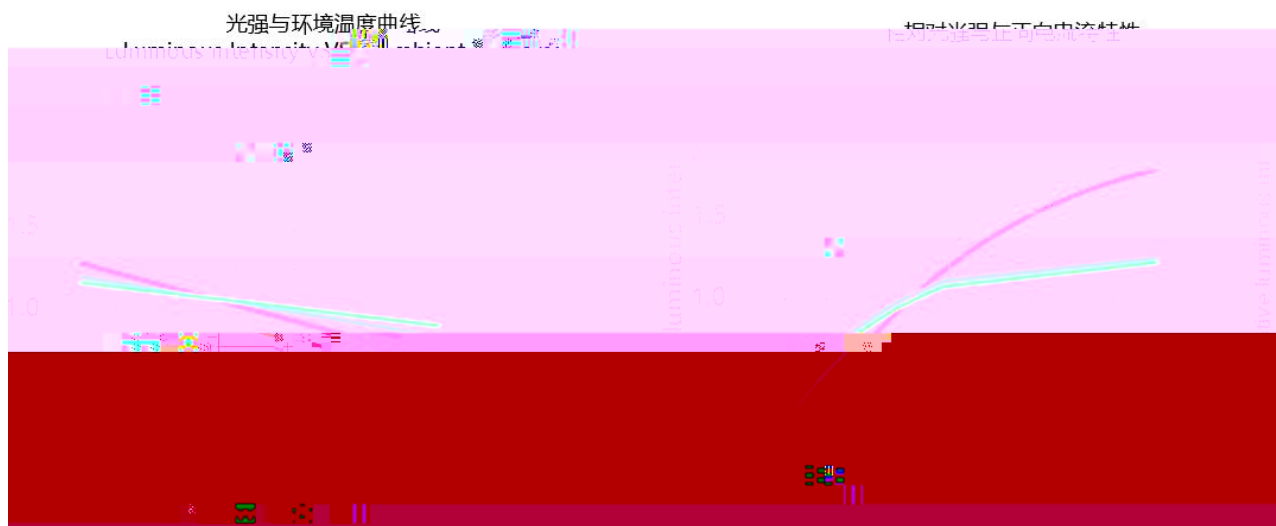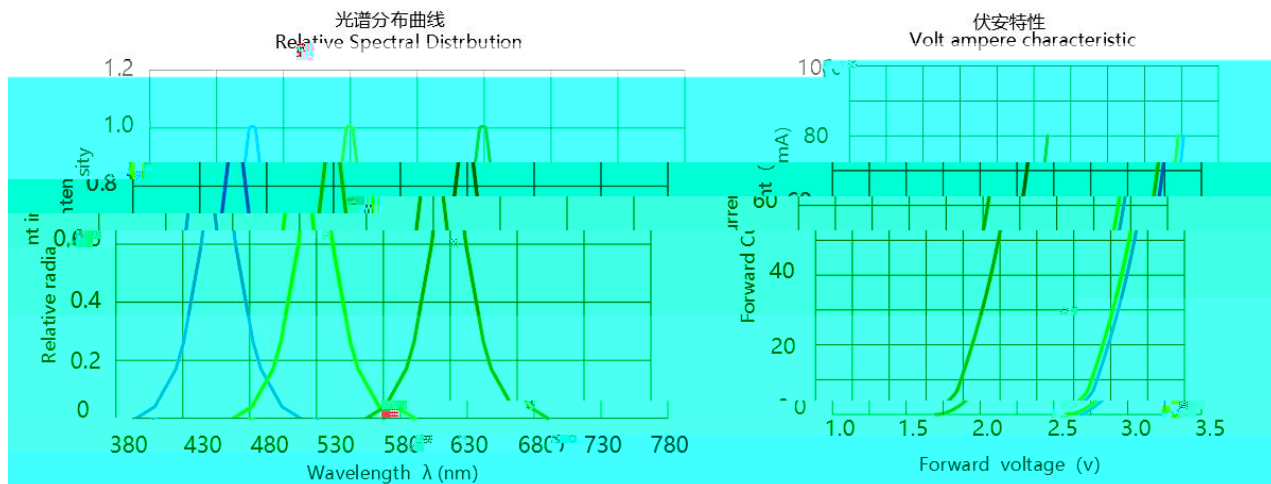






包装（1）

Packaging (1)

载带与圆盘尺寸

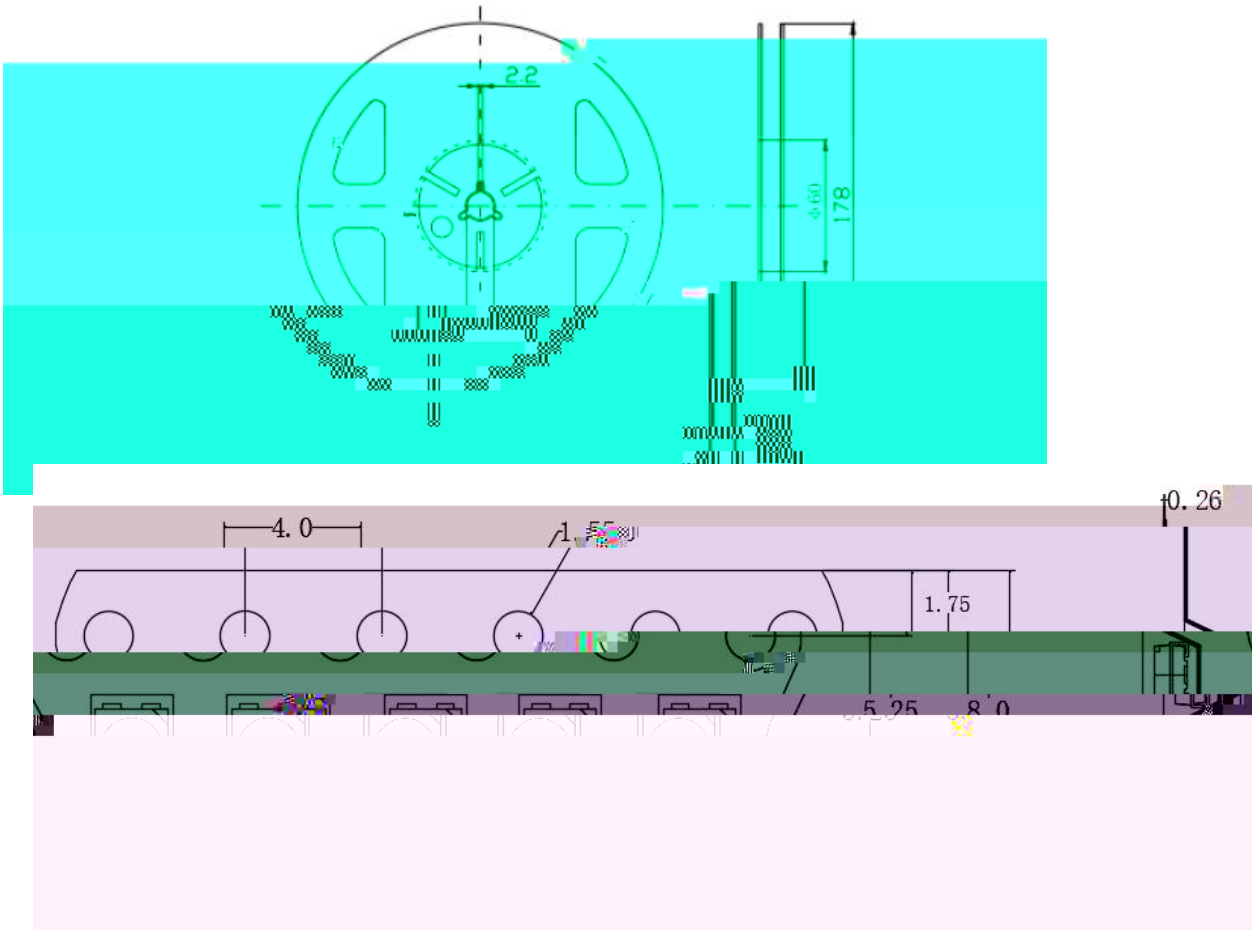

:

1. (mm)
 1. Size unit is mm (mm).
 2. $\pm 0.1\text{mm}$
- The dimensional tolerance is $\pm 0.1\text{mm}$.

圆盘及载带卷出方向及空穴规格 Disk and carrier belt direction of rotation and hole specification







When handling, touching the encapsulated virus, hands will not only contaminate its surface, but also affect

III

WV

HQ

When handling, touching the encapsulated virus, hands will not only contaminate its surface,

but also affect

"e

p

