



目録

中性点接地

典型特性曲线

电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Parameter	Symbol	Value	Unit
Max Power Dissipation	PD	50	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR		
Storage Temperature Range	TSTR		
/ Lead Soldering Temperature/Time	TSOL	260 ≤ 6S	/

≤ ≤ ≤ ≤

光电 Ta=25 Optical-electrical parameter(ta=25)

光强

光通量



光

光通量

光通量

典型特性曲线

Typical Characteristics Curves

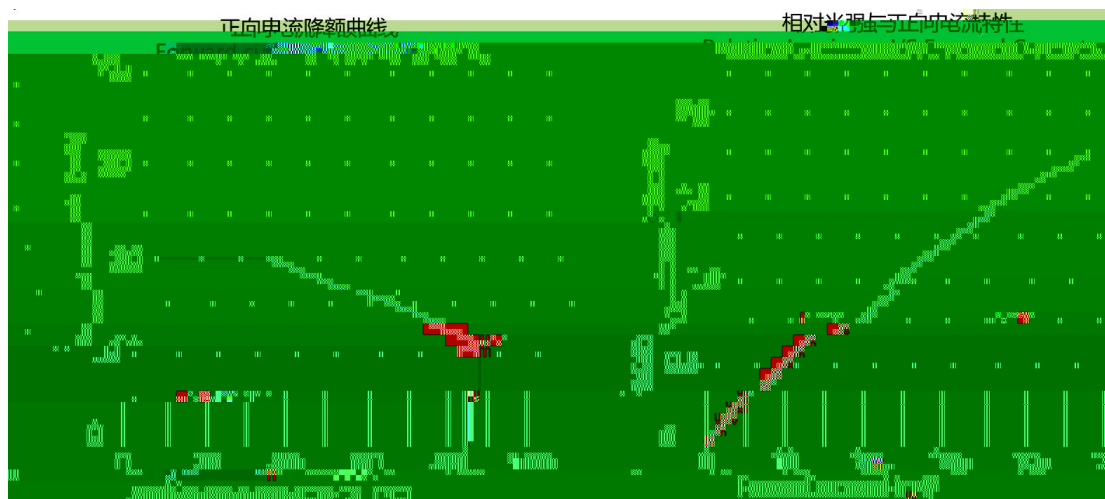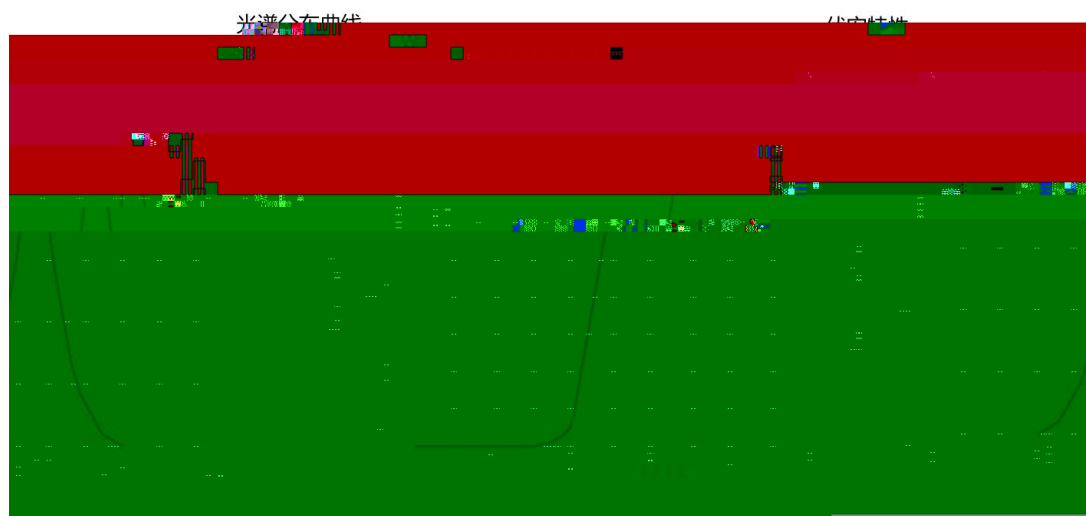

±

±











