

335 暖白 0.5W 贴片式发光二极管

特点 () :

* 2.5*0.8mm

Dimensions (L / w) : 2.8x3.5 x 0.8 mm

Typical color [colloi White light / Yellow colloi] "

应用领域 (P) :

CON D !



电性参数

Ta=25 Absolute Maximum Rating(ta=25)


Parameter	Symbol	Value	Unit
Max Power Dissipation	PD	500	mW
Max Continuous Forward Current	IF	150	mA
Peak Forward Current	IFP	300	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR	-40 ~ +85	C
Storage Temperature Range	TSTR	-40 ~ +85	C
/ Lead Soldering Temperature/Time	TSOL	260 ≤ 6S	/

* ≤ 0.1ms ≤ 1s10

* Note: 1Ψ e

光电参数

Ta=25 Optical-electrical parameter(ta=25)

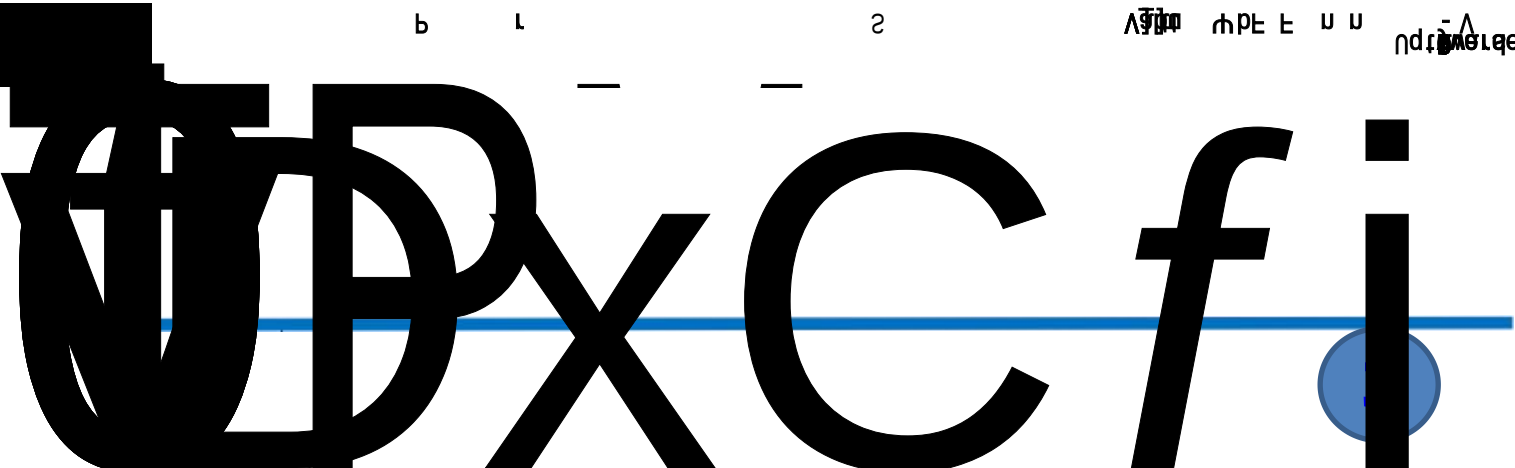






可靠性试验

Rehabilitate Test Items And Conditions

Test		
Class	item	Testing environment

外形尺寸

Outline Dimension

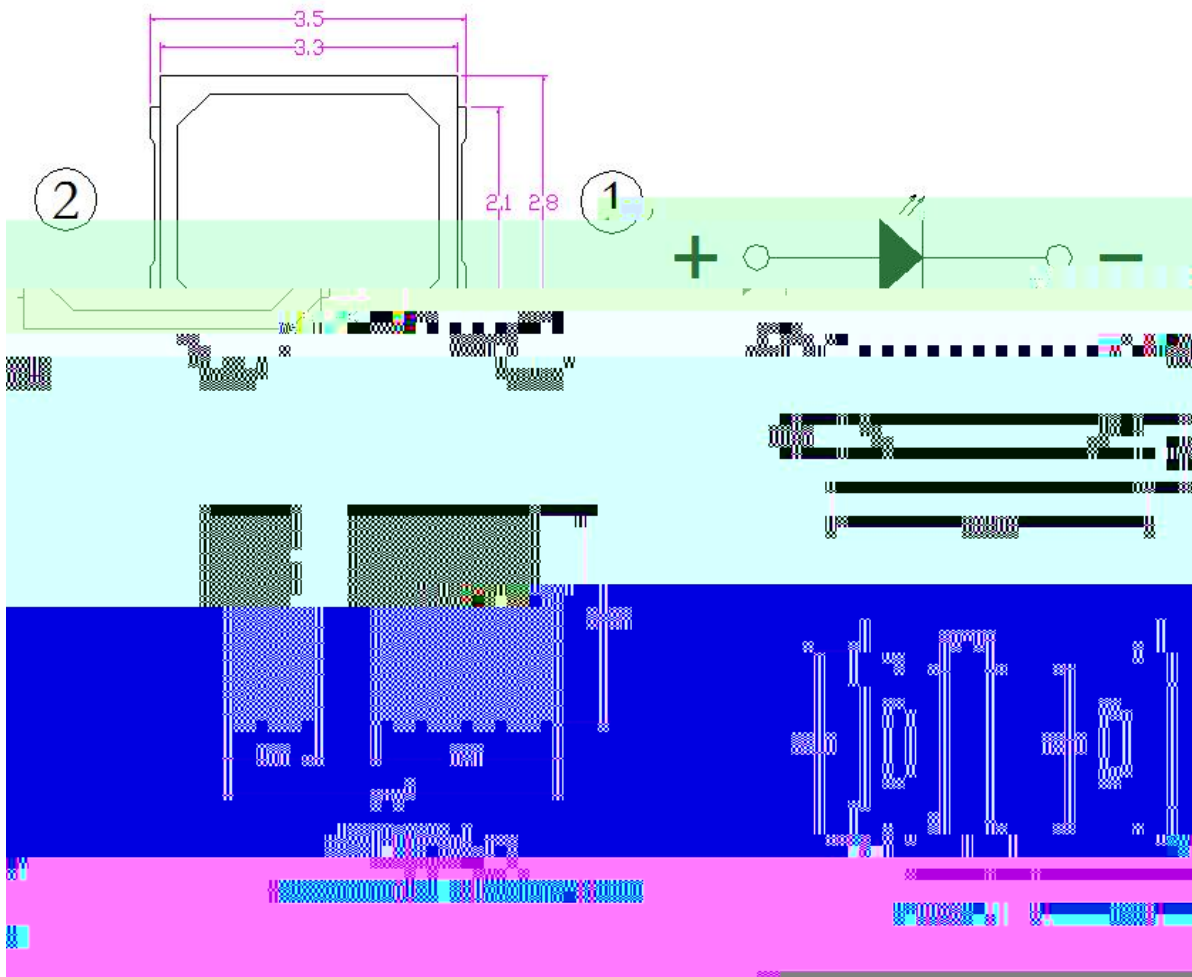

1. mm

Remarks: All dimensions are in millimeters.

2. $\pm 0.25\text{mm}$


Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted




包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Anti-Static Foil Bag

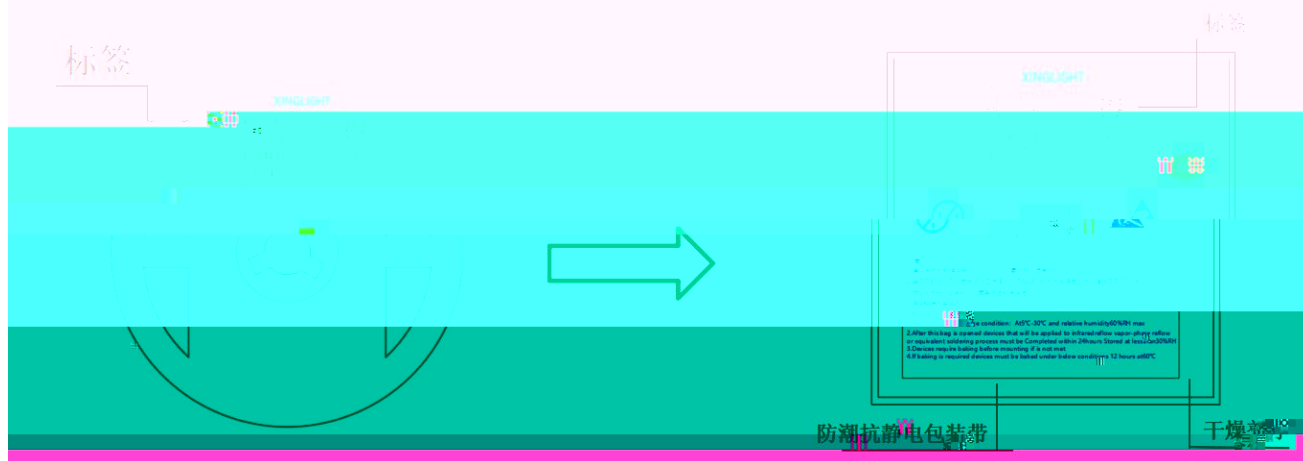

◇ 外包装箱 Cardboard Box

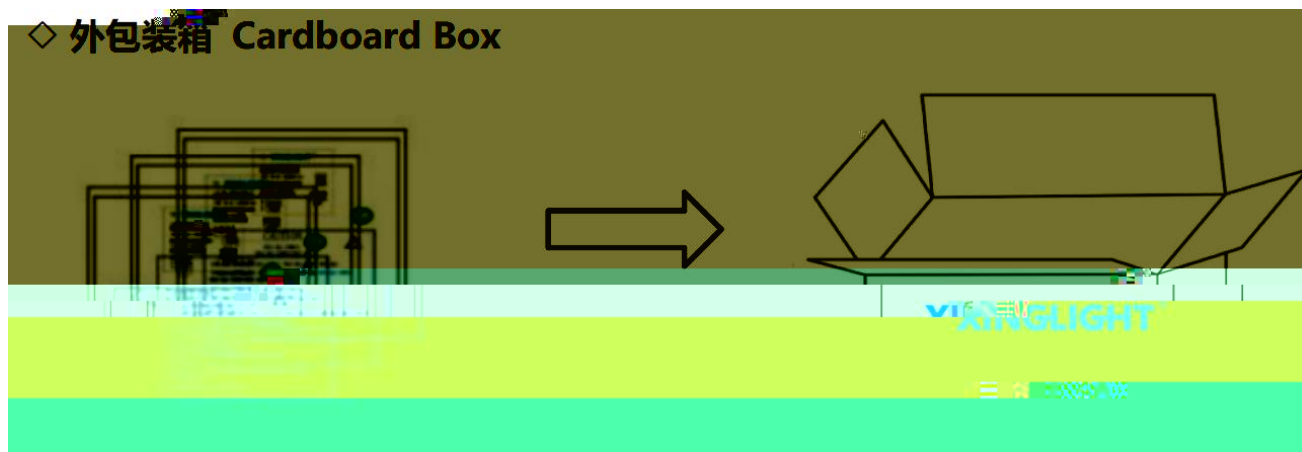





使用注意事项（3）

Precautions (3)

the product, touching the encapsulant with bare hands will not only contaminate the product, but also damage the encapsulant.