

1209 红翠绿双色



No. : XL-3227SURUGO





No. : XL-3227SURUGO





No. : XL-3227SURUGO




亮度分档

代码	最小值	最大值	单位	测试条件
D3	120	150	mcd	IF=20mA
D4	150	180		
D5	180	210		
E5	550	600		
E6	600	700		
E7	700	800		
E8	800	900		
E9	900	1000		

□

典型特性曲线

Typical Characteristics Curves

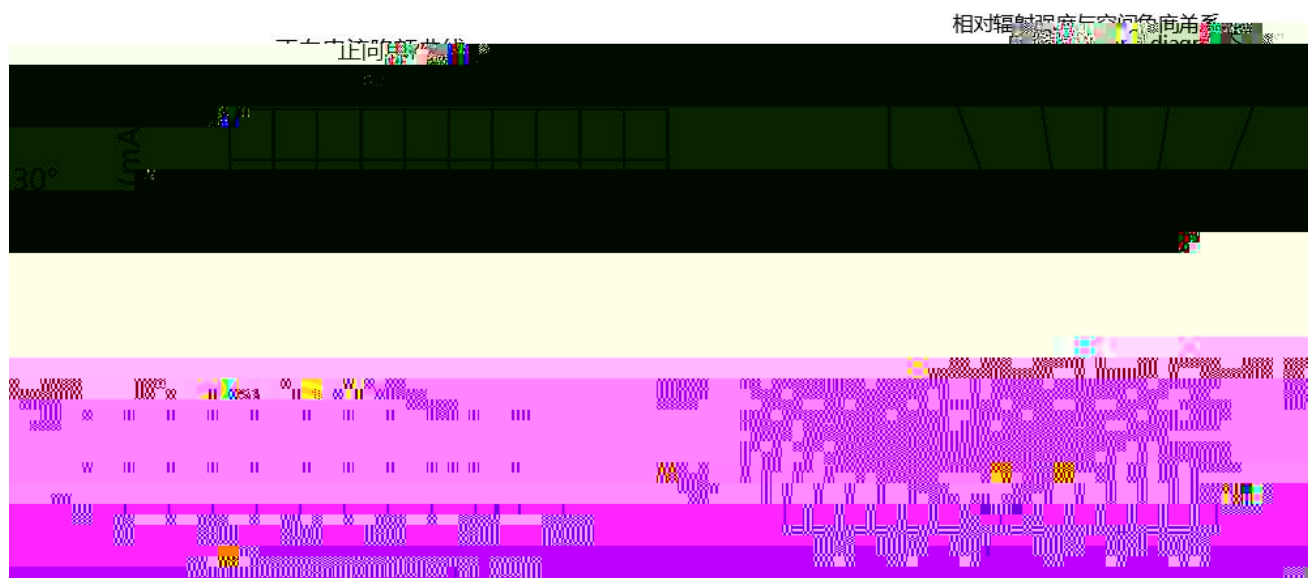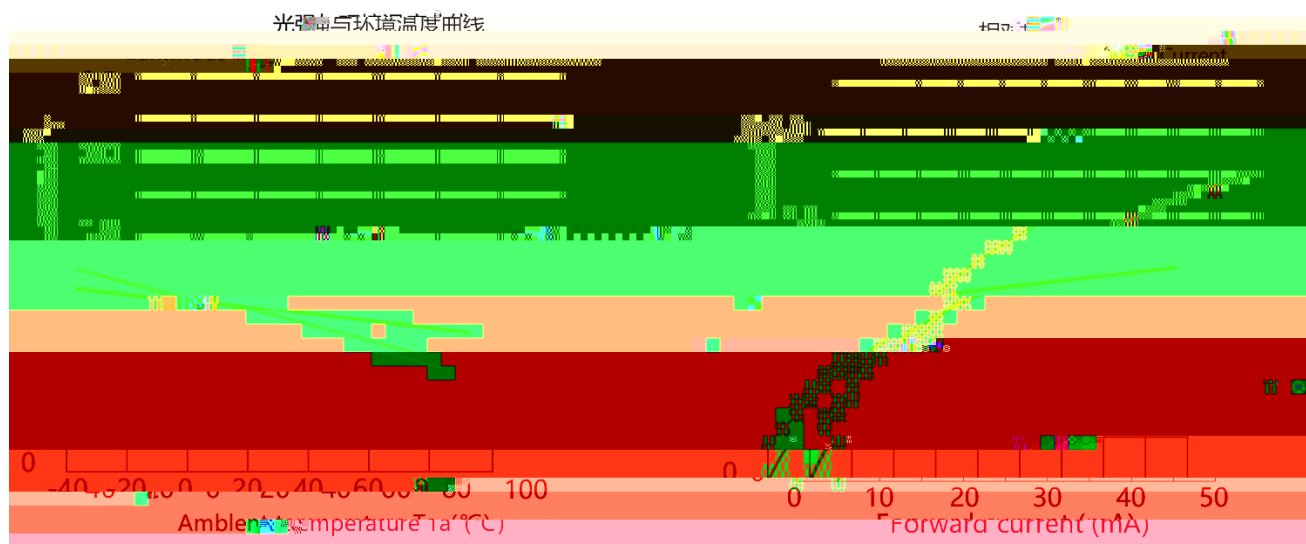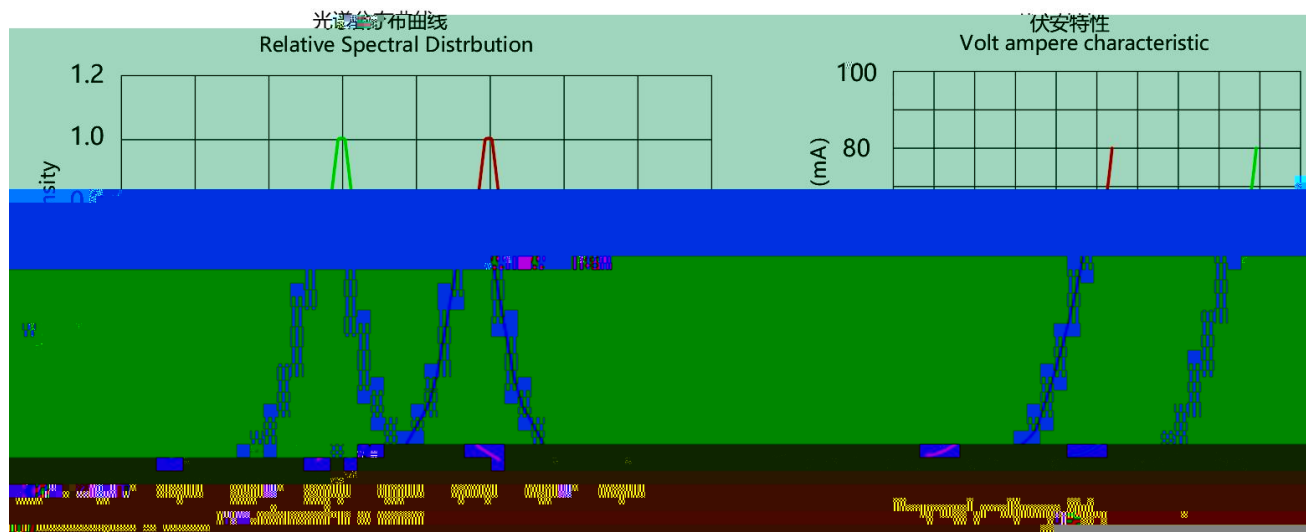

25 ± 5 /Note If not otherwise indicated the test environment temperature is 25 ± 5

可靠性试验

Reliability Test Items And Conditions

--	--



Moisture proof
grade

on maximum wH



No. : XL-3227SURUGO




IPBPT80D-4V0

No. : XL-227A




包装 (1)

Packaging (1)

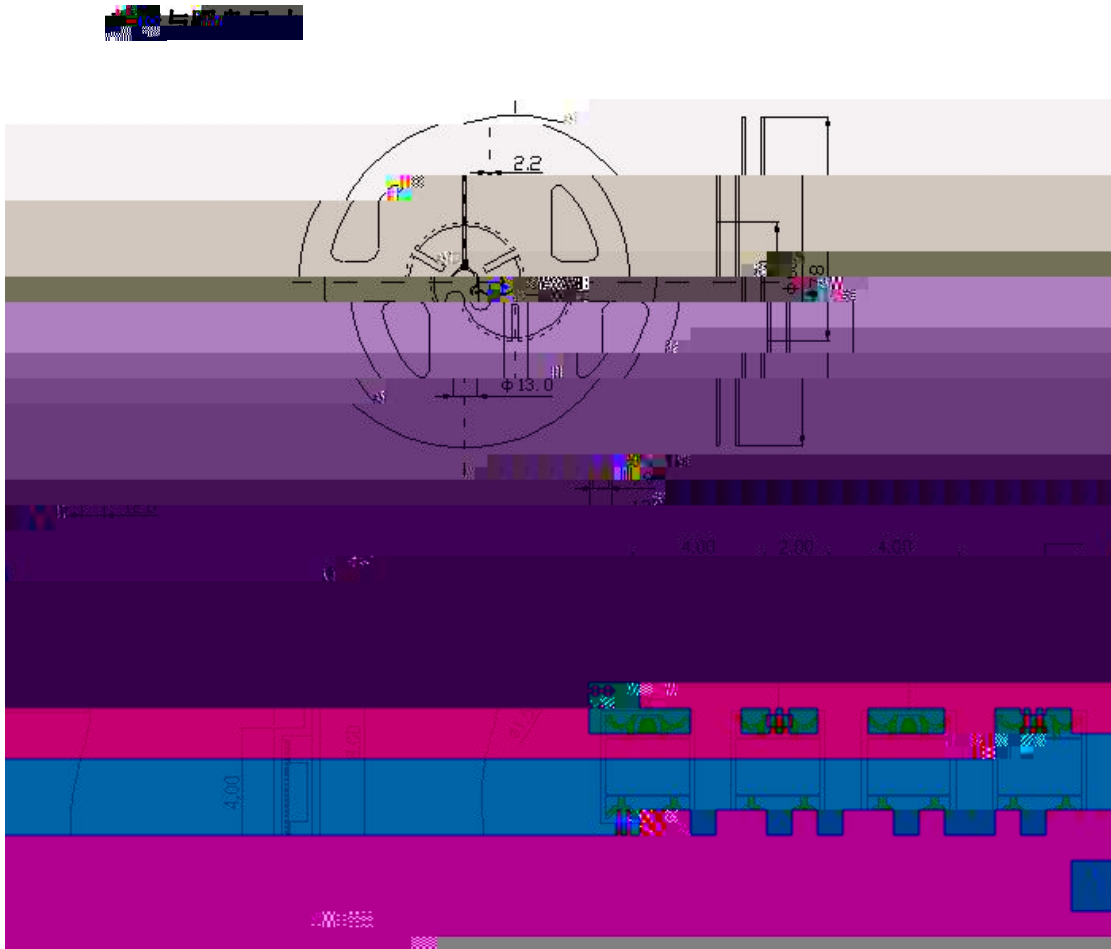

:

1. (mm)
1. Size unit is mm (mm).
2. $\pm 0.15\text{mm}$
2. The dimensional tolerance is $\pm 0.15\text{mm}$.

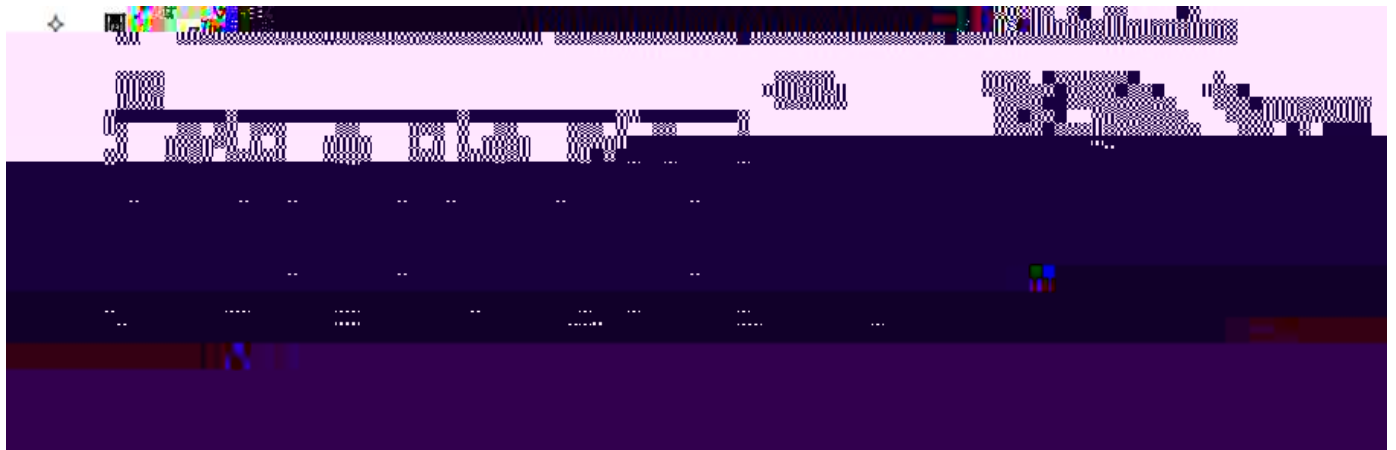






No. : XL-3227SURUGO



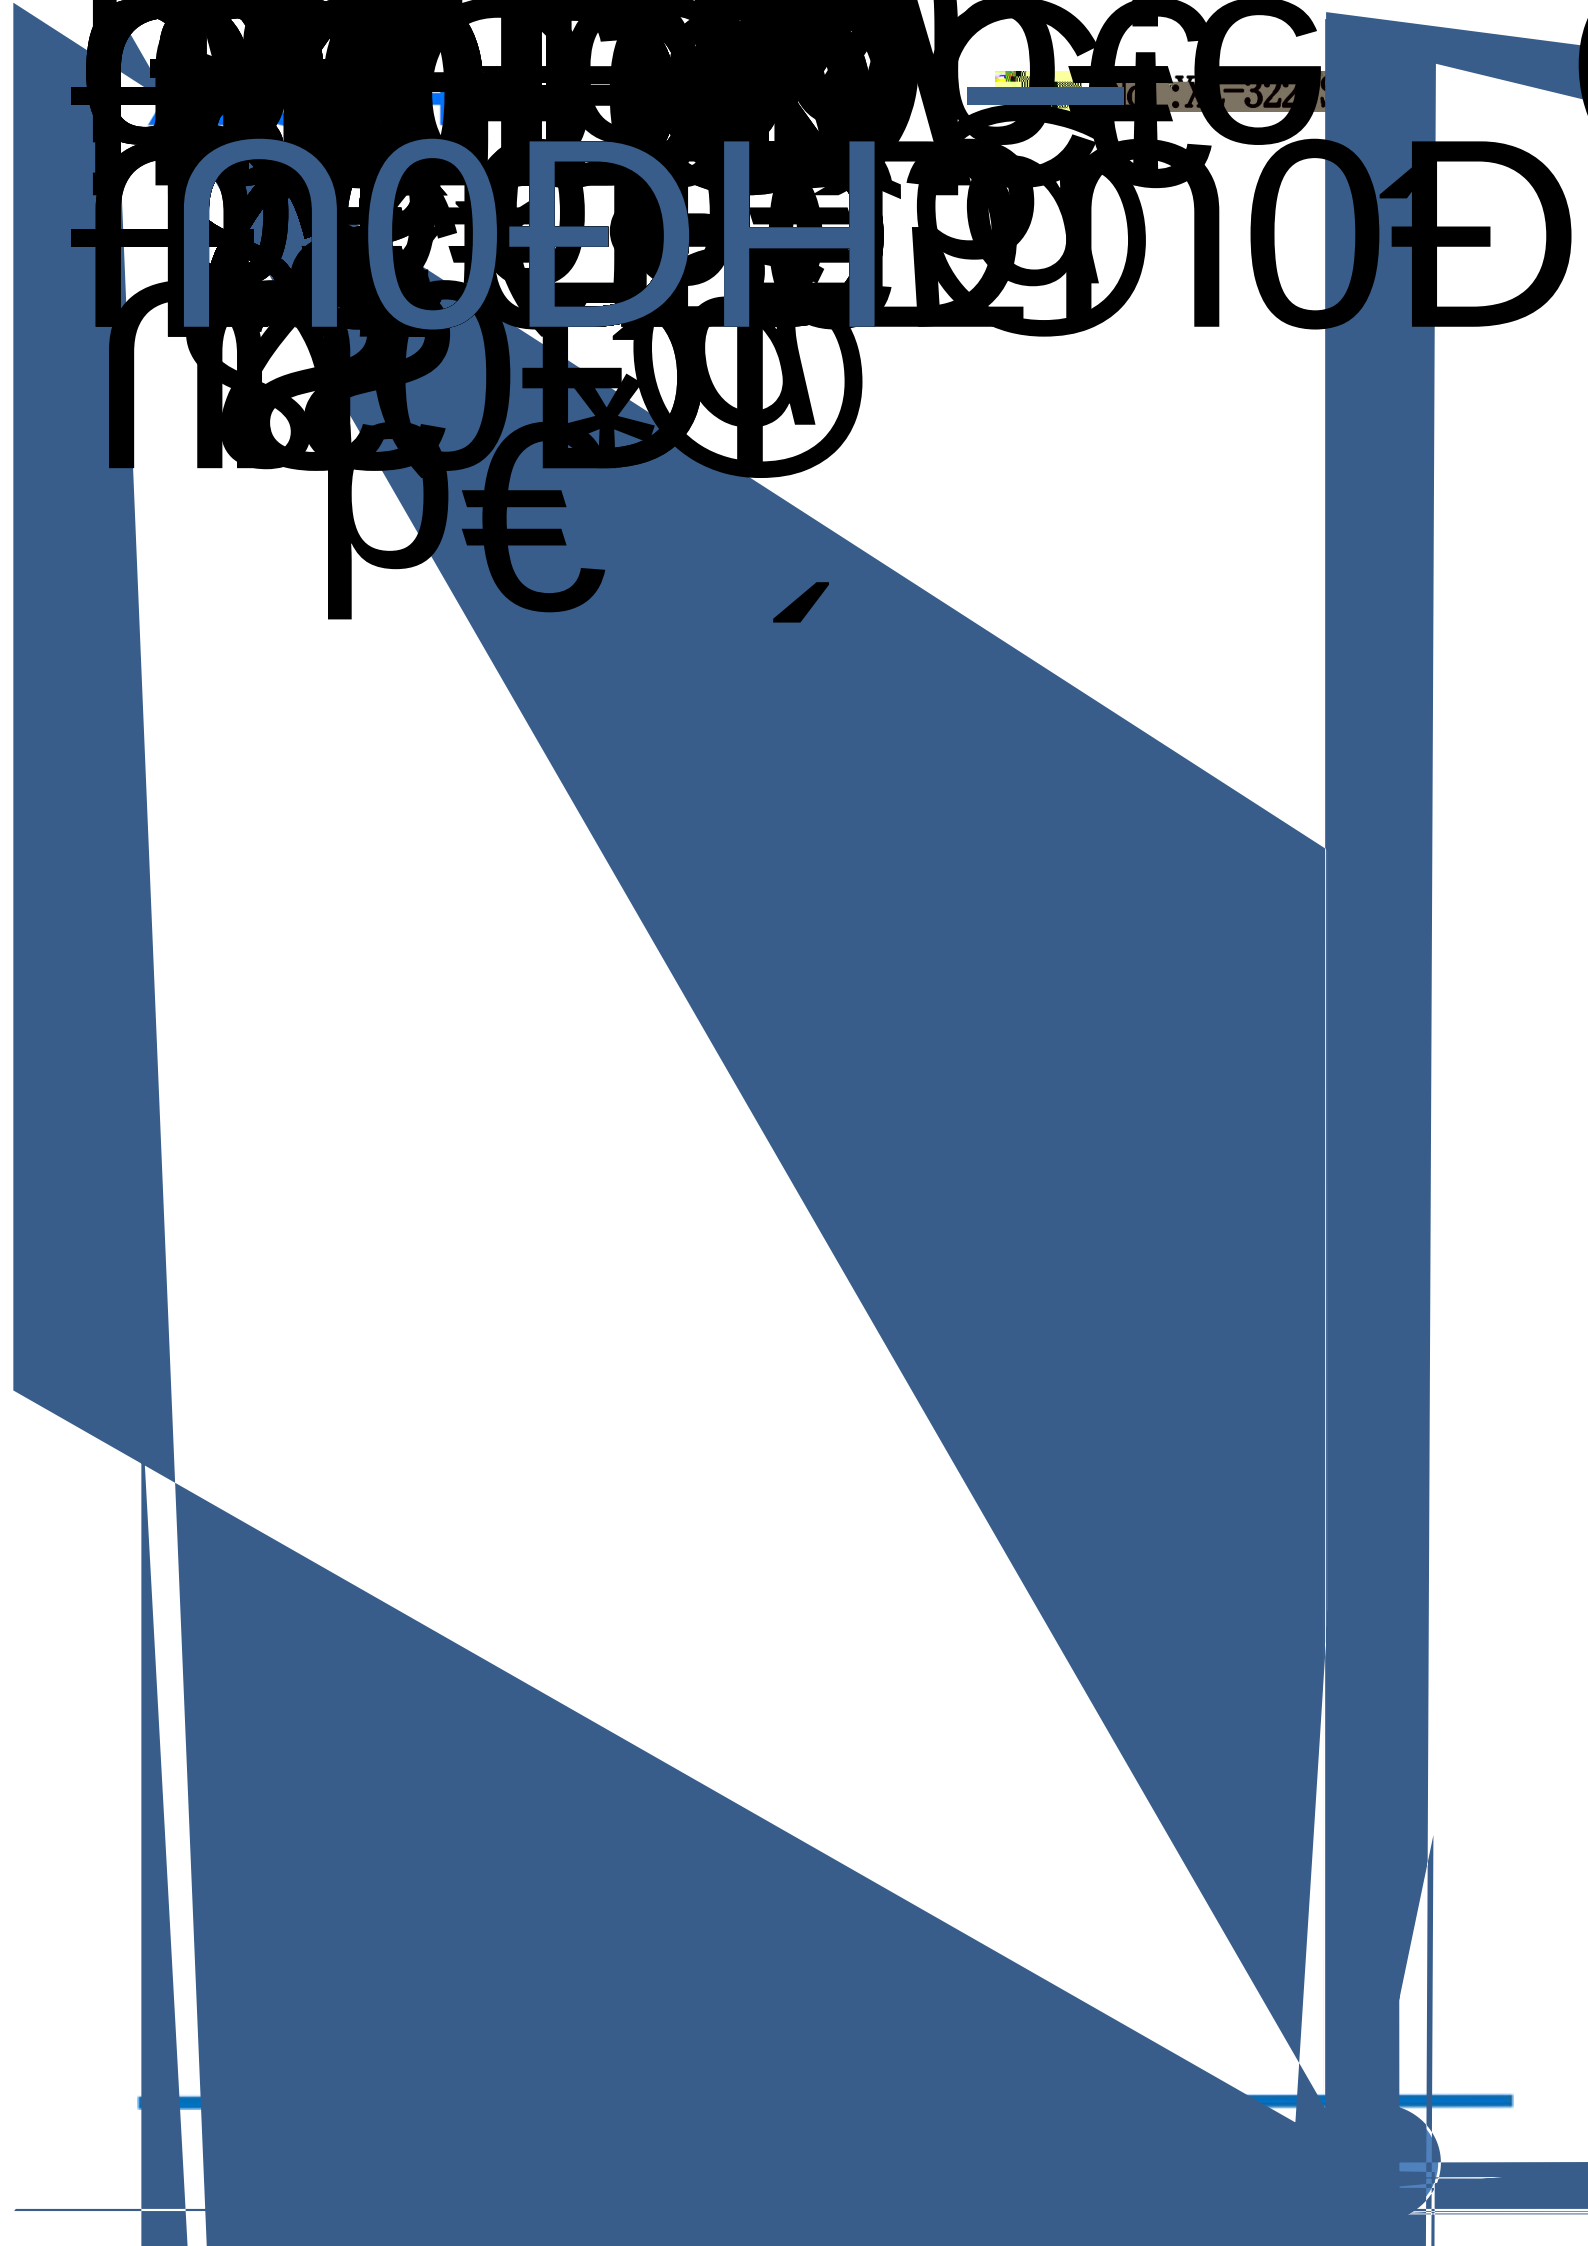

noDHIOD

p€

使用注意事項（2）

Precautions (2)





No. : XL-322750R004