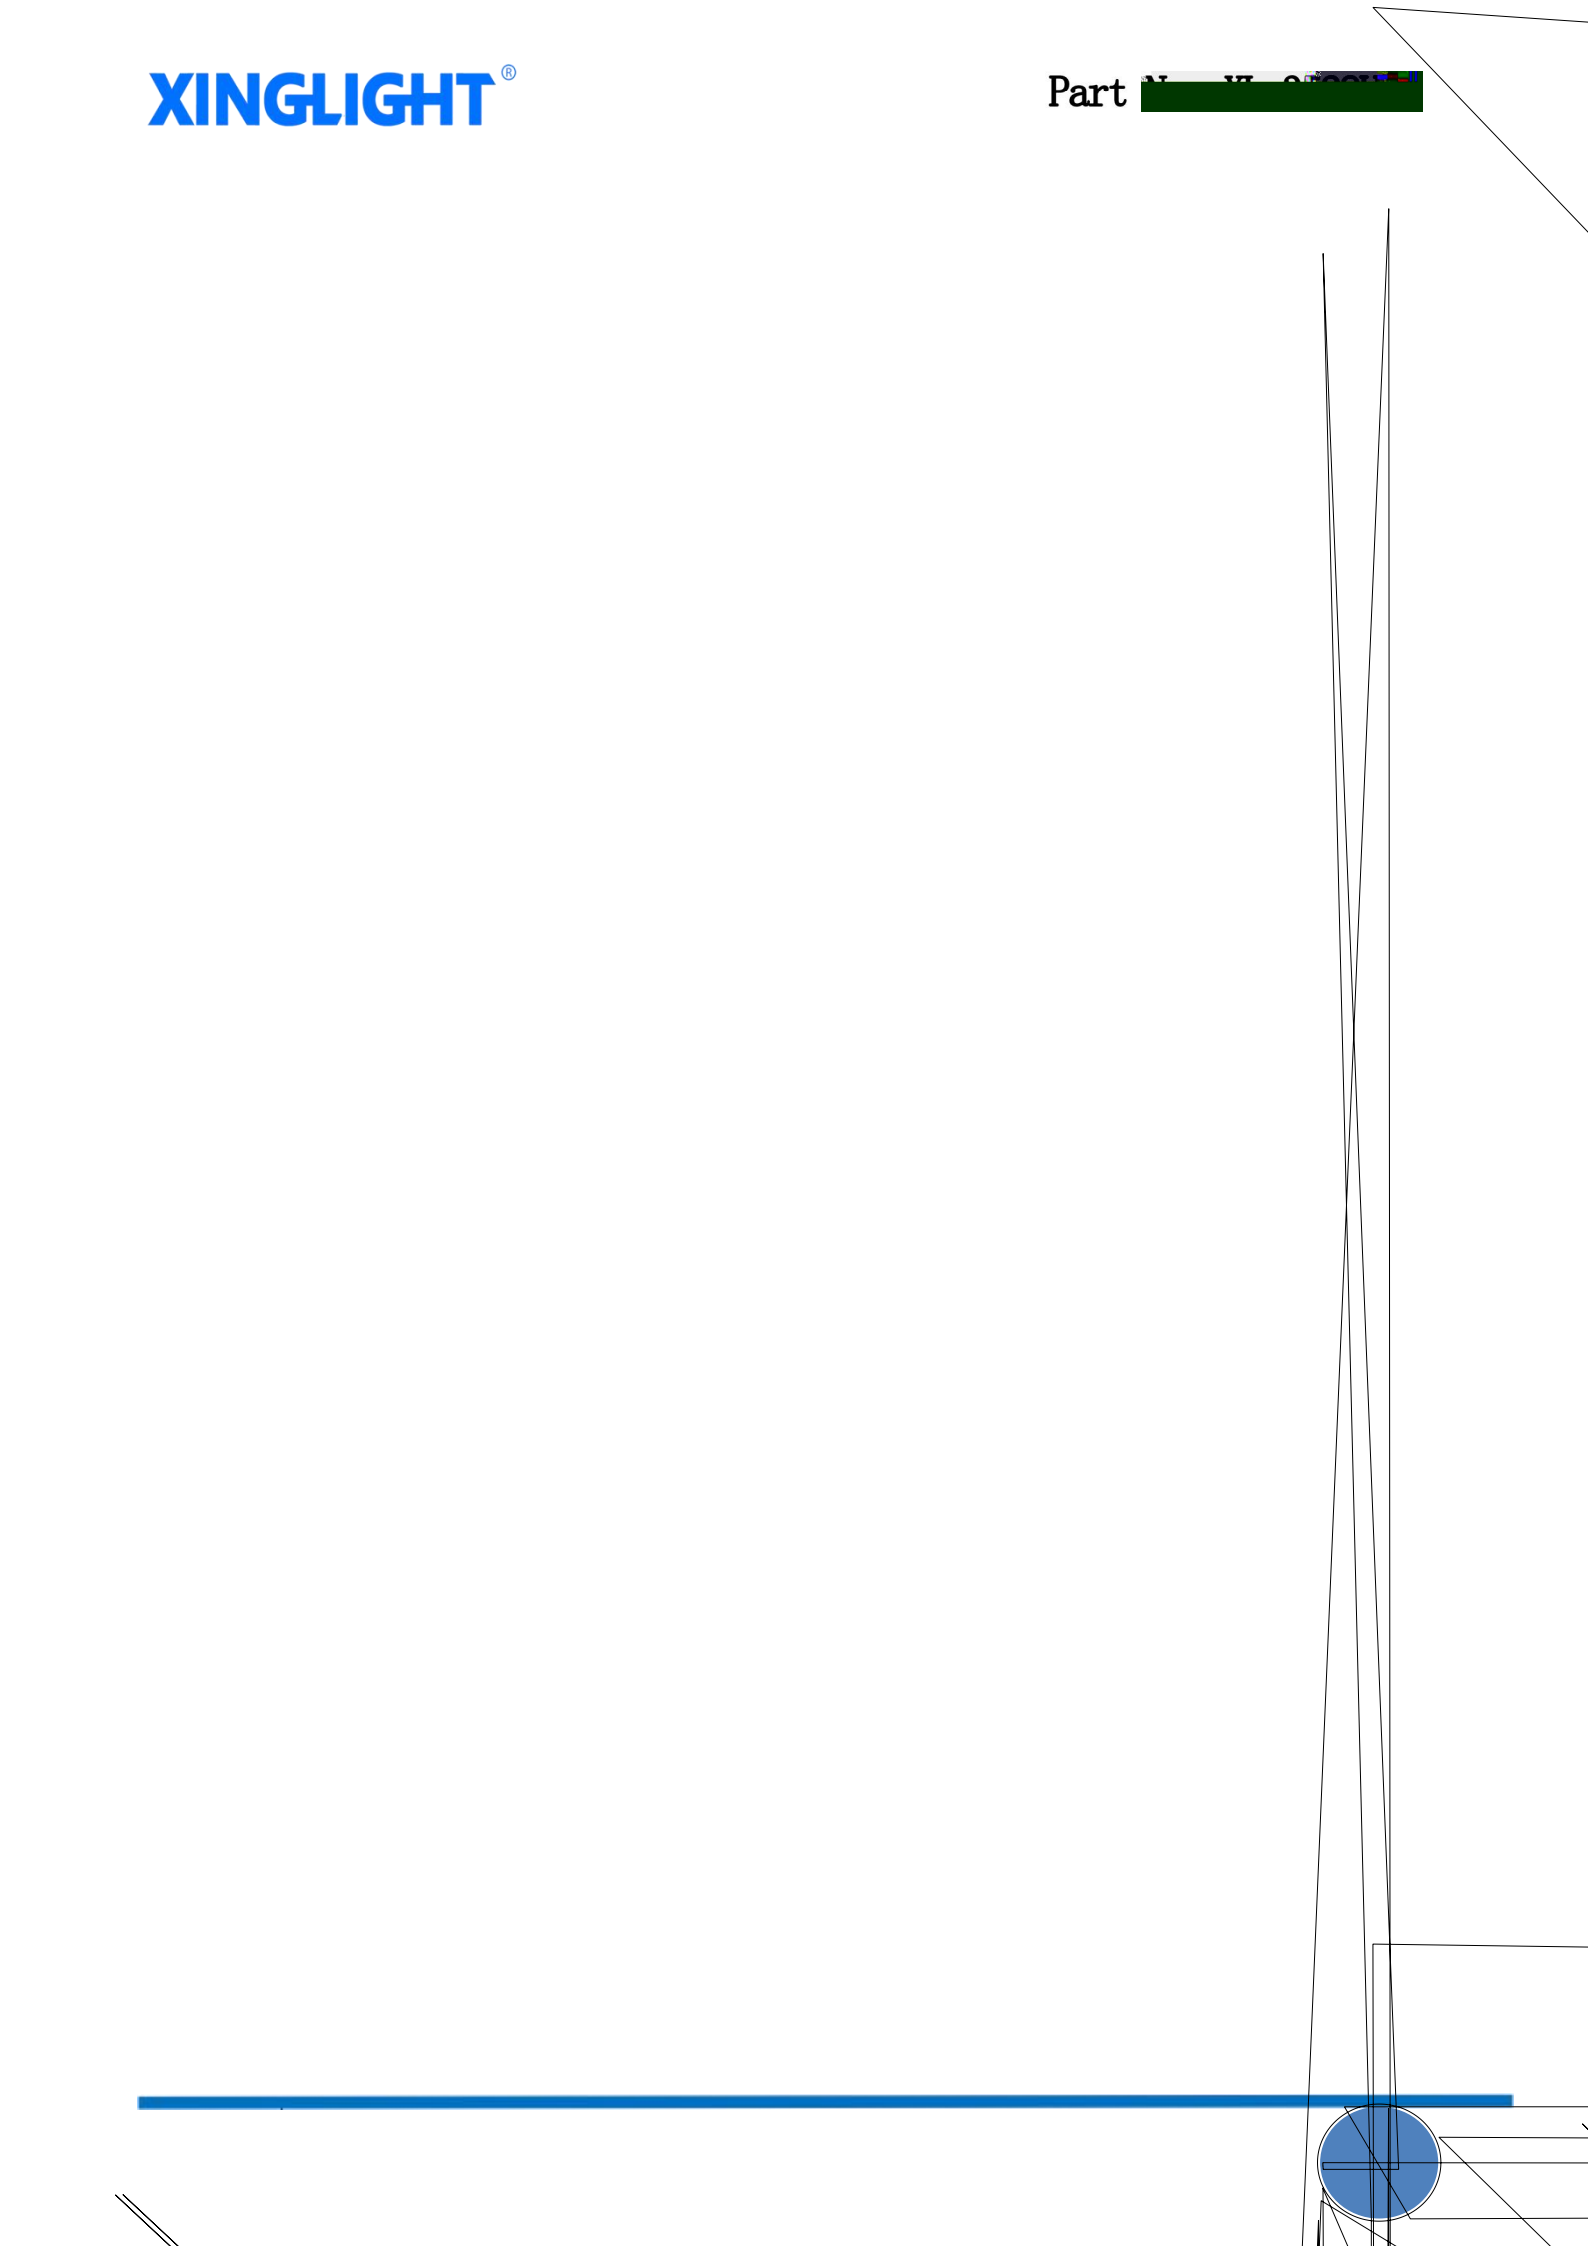

Part [redacted]

亮度分档:
Brightness grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test condition
E2	400	450	mcd	IF=20mA
E3	450	500		
E4	500	550		

电压分档:
Voltage

XINGLIGHT®

可靠性试验

Reliability Test Items And Conditions

Class	Test Item	Testing environment				
	Working life	Ð Ý Ý 20mA				Continuous lig maximum rated current
Endurance test	High temperature and high humidity storage Ũ	IR-Reflow In-Board, 2 Ta= 85±5 ,				
	High-temperature storage	Ta= 85±5				
	ý Ũ Low temperature	Ta= -40±5				
	Cold and hot cycle	105 30mins	25 5mins	-55 30mins	5	
Environmental testing						