
















包装 (1)

Packaging (1)

载带与圆盘尺寸 Belt and disk dimensions

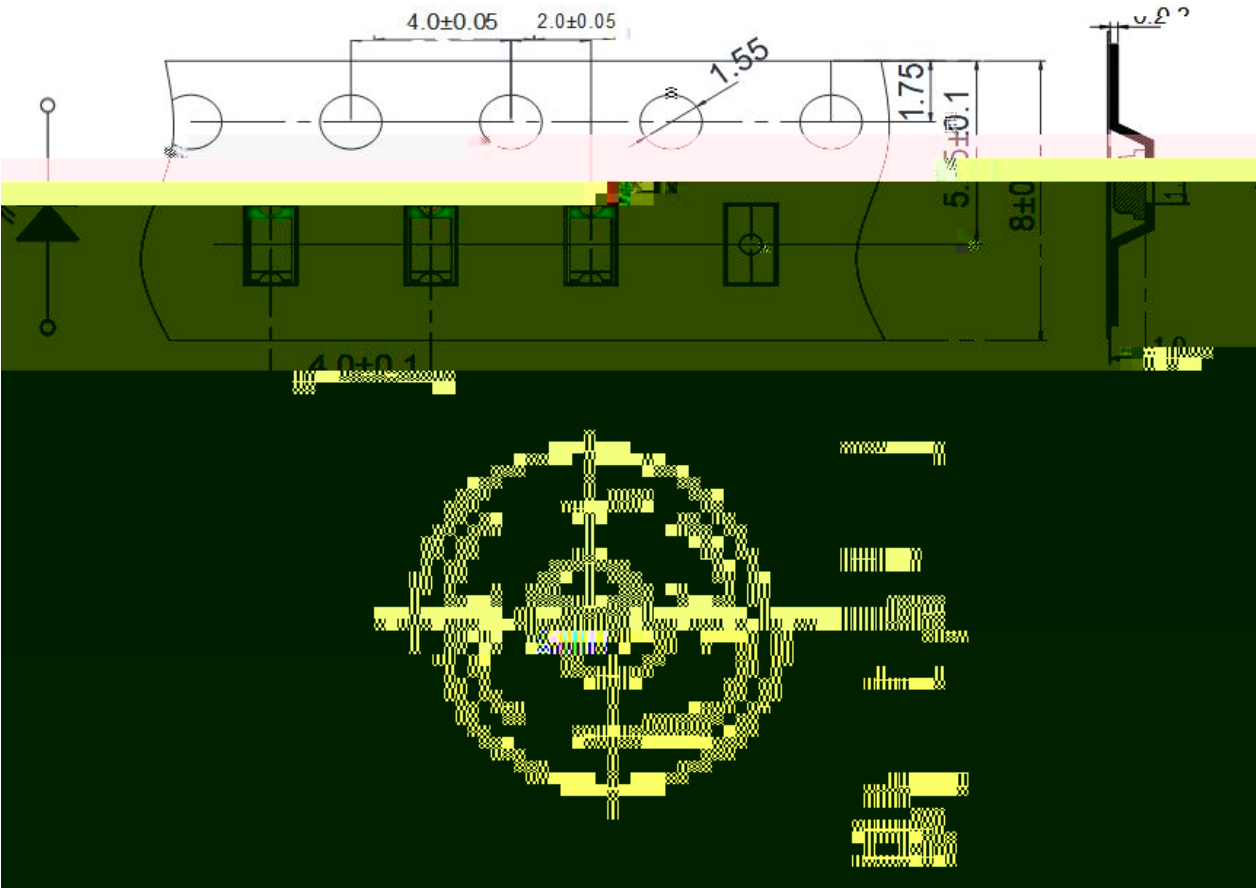


圆盘及载带卷出方向及空穴规格 Disk and carrier belt direction of roll and hole dimensions




包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Anti-Static Plastic Foil Bag

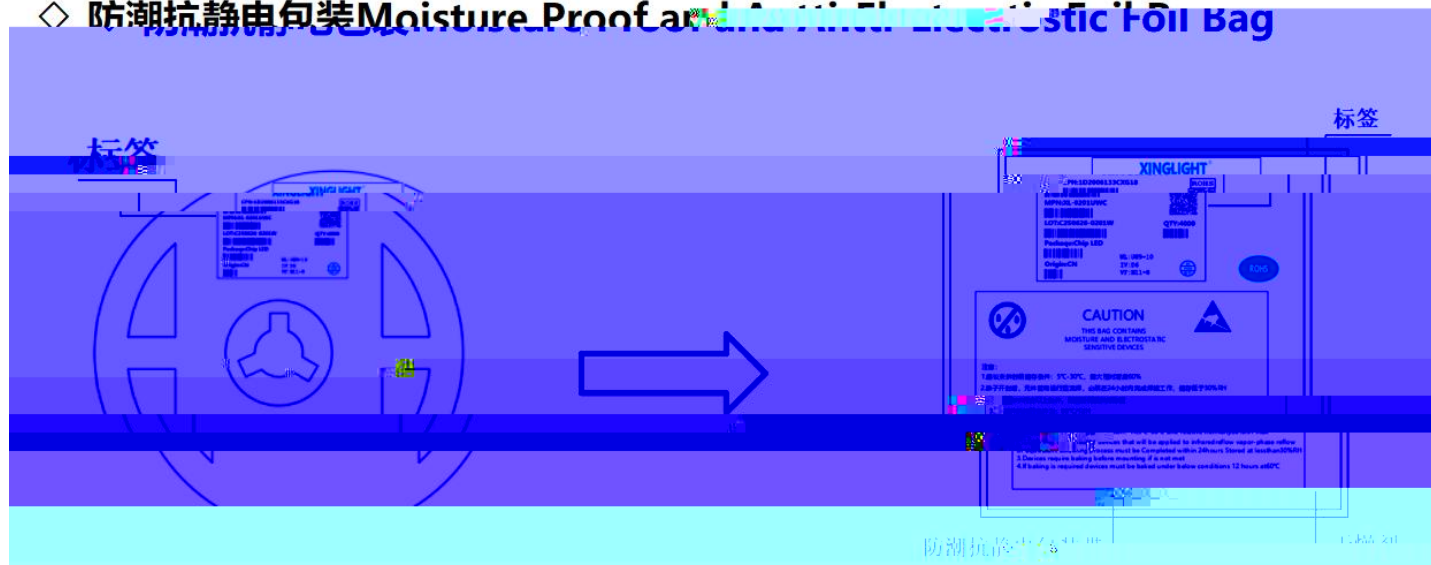


◇ 外包装箱 Cardboard Box

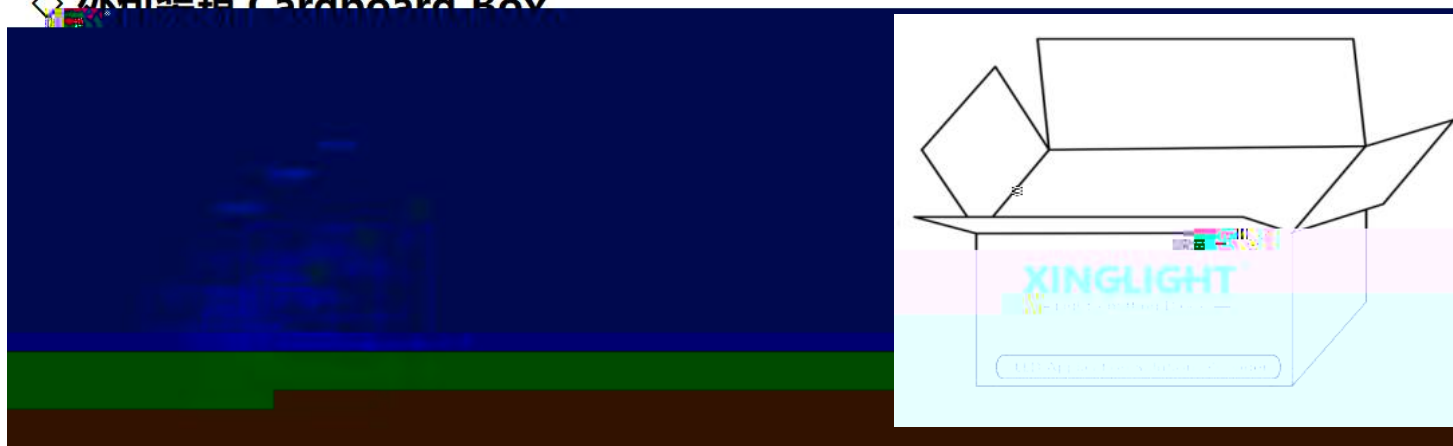

◇ 标签说明 Label Expantion

CPN: 批号/料位 LOT: 日期/封装颜色
MPN: 型号 V/C: 电压/功率
WI: 色温代码 IV: 亮度代码
PACIOMOL: 封装

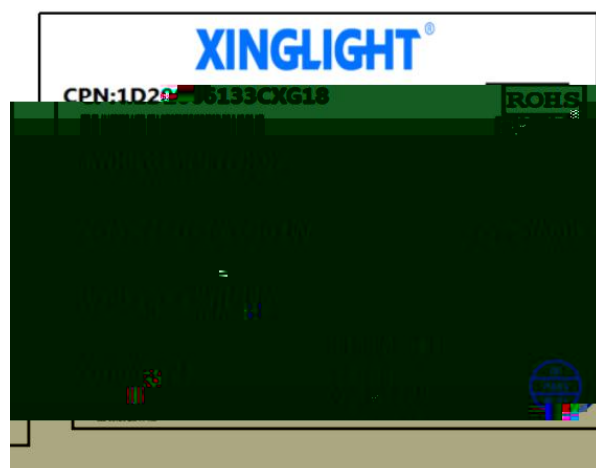




使用注意事项 (2)

Precautions (2)

3. 设计建议:

Design Consideration

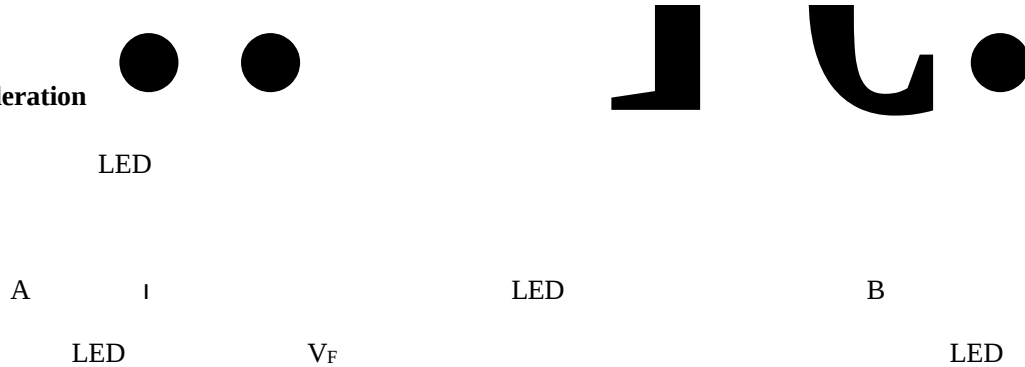

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will may cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current through

