














### Date transmission mode

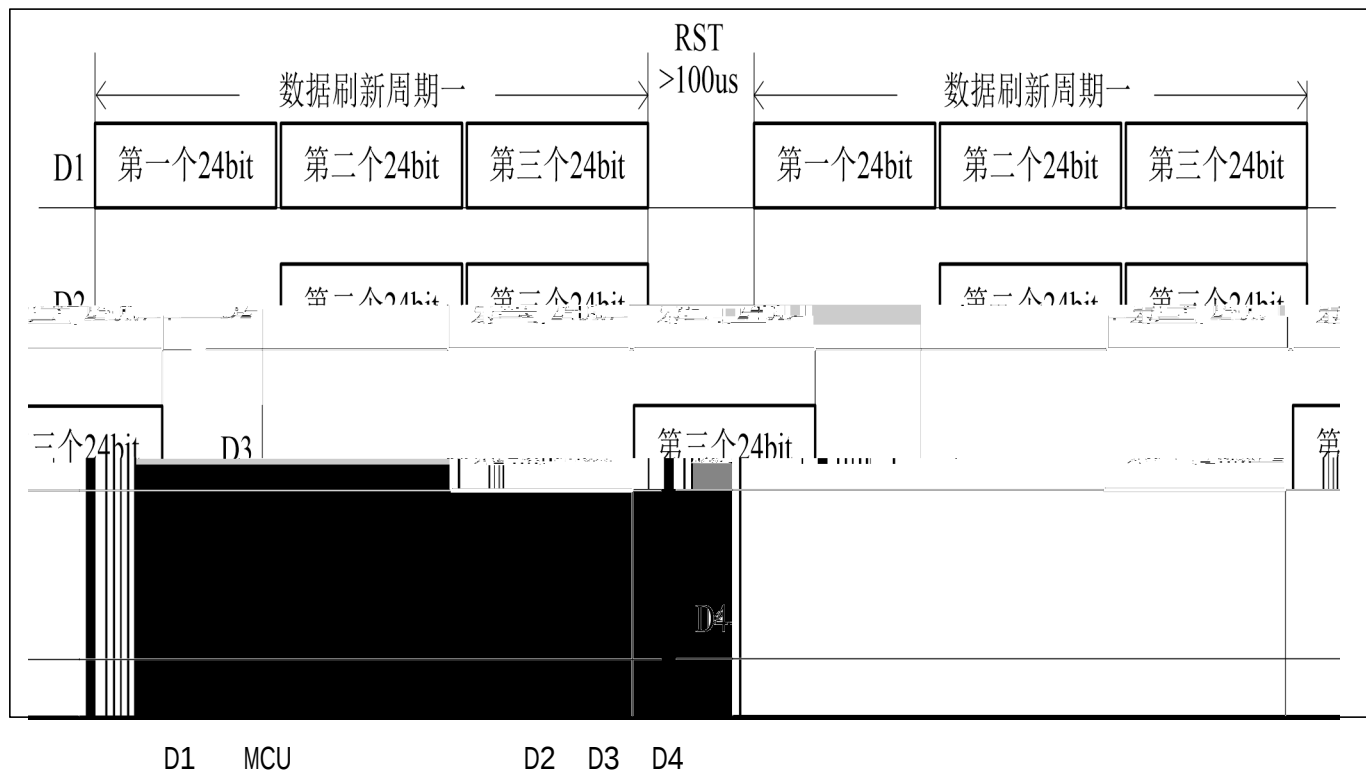


Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

### 24bit 24bit data structure



Note: high order first send, send data in the order of GrB

### :Time sequence waveform:

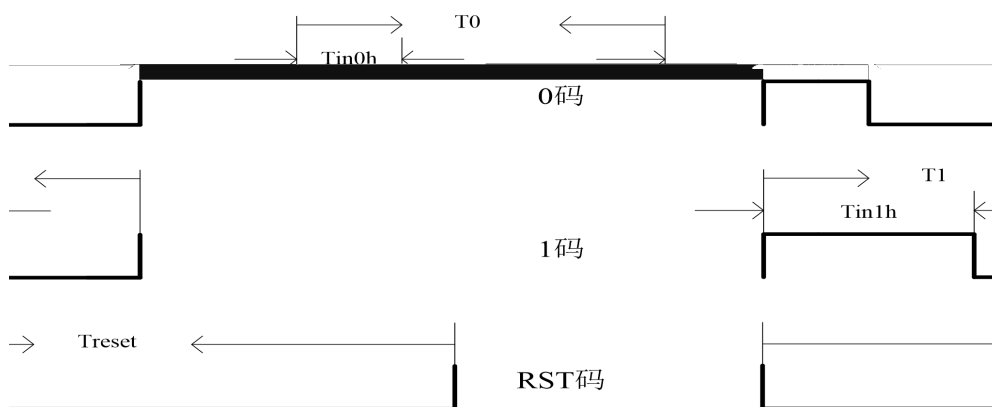











外形尺寸

Outline Dimension

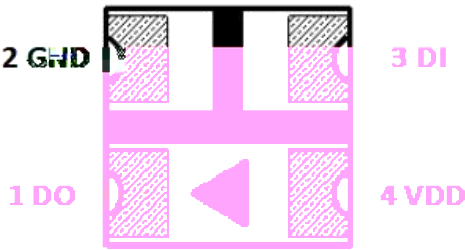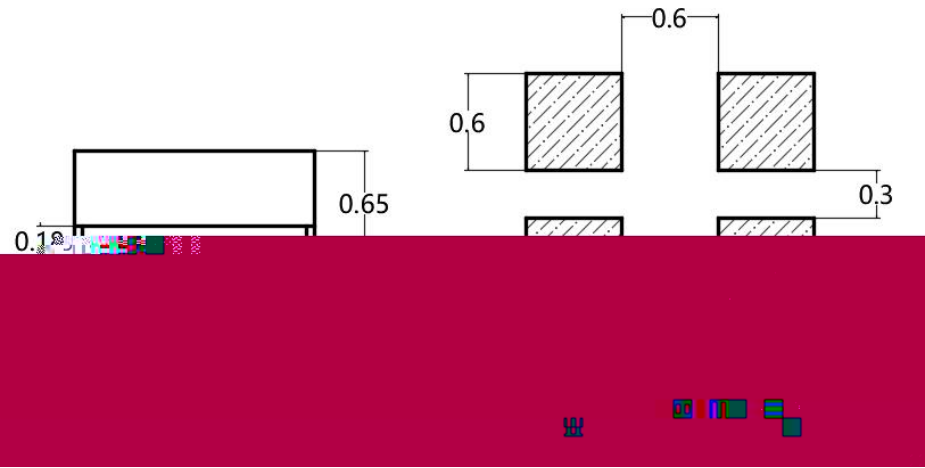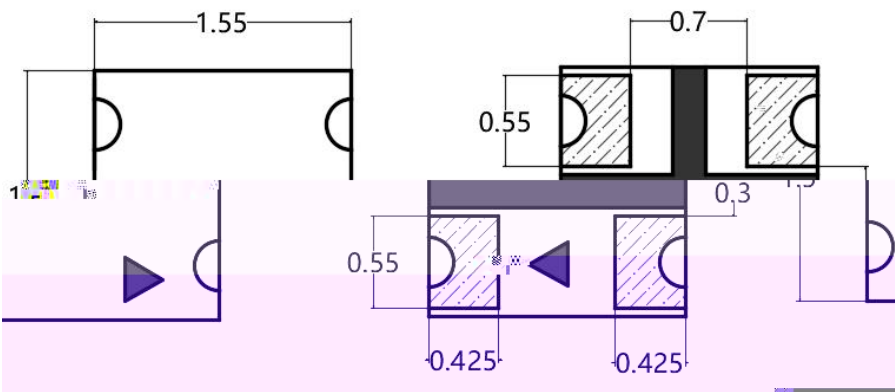

±0.1mm

±


|  |  | IC RGB |
|--|--|--------|



## 包装 (2)

### Packaging (2)

#### ◇ 防潮防静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

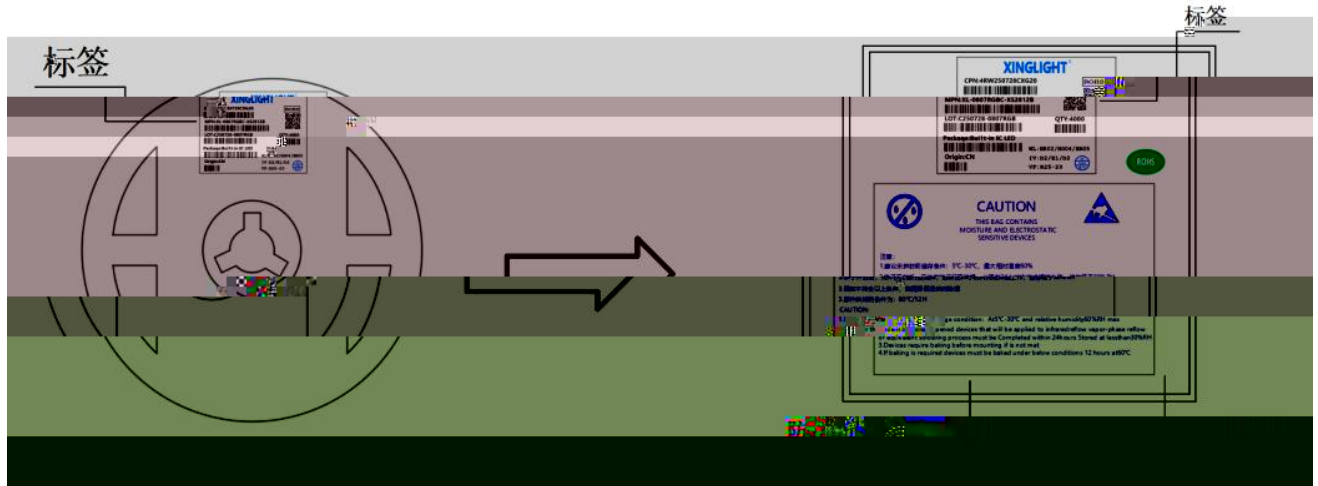

#### ◇ 标签说明 Label Explanation

| CPN: 批号/档位 |  | LOT: 日期/封装颜色 |  | XINGLIGHT                                      |                     |
|------------|--|--------------|--|------------------------------------------------|---------------------|
| MPN: 型号    |  | VF: 电压代码     |  | CPN:4RW250728CXG20                             | QTY:4000            |
| WL: 波长代码   |  | IV: 亮度代码     |  | MPN:XL-0807RGB                                 | LOT:C250728-0807RGB |
|            |  |              |  | Packaging: Moisture and Electrostatic Foil Bag |                     |

## 焊接指导 (1)

Guideline for Solder

