





电性参数

Electrical Characteristics

Ta=25℃ Absolute Maximum Rating(Ta=25℃)



No. : ~~XL-HD6070UBC-A2-BD~~









包装 (1)

Packaging (1)


载带与圆盘尺寸

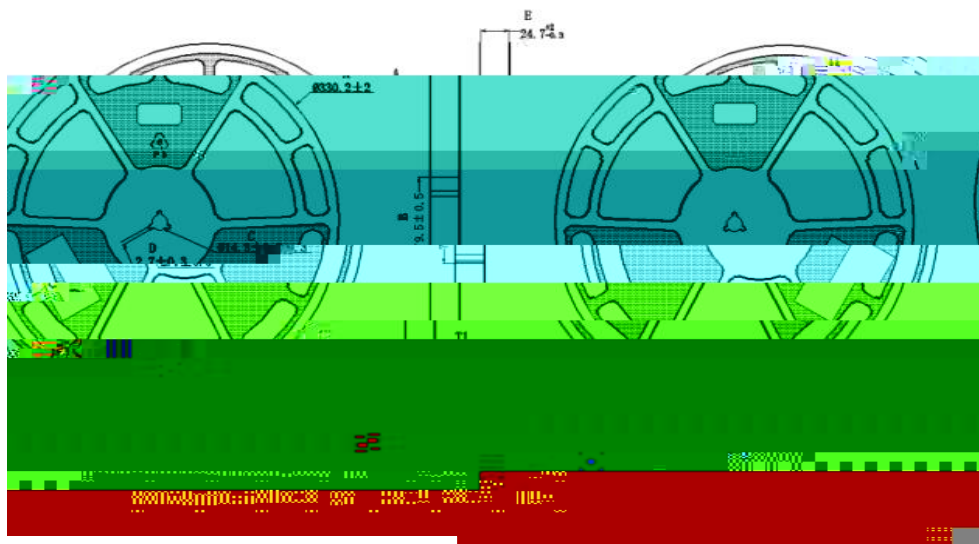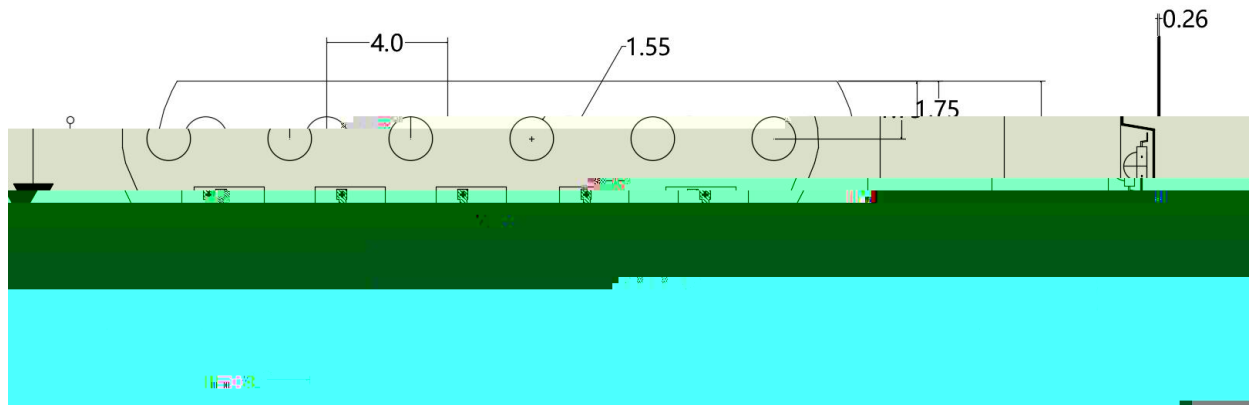


:

1. (mm)山
1. Size unit is mm (mm).
2. ±0.1mm山
2. The dimensional tolerance is $\pm 0.1\text{mm}$.

圆盘及载带卷出方向及空穴规格 Disk and carrier belt direction of roll and hole dimensions

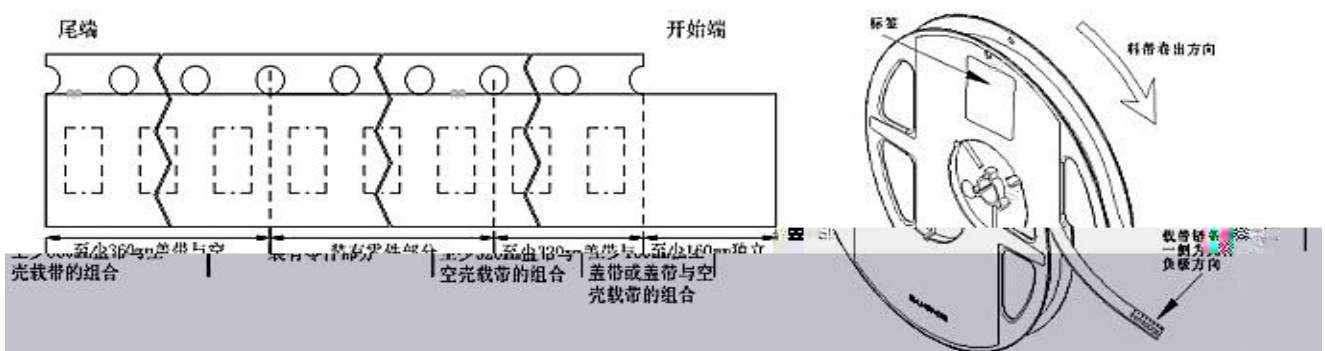

Packaging (2)

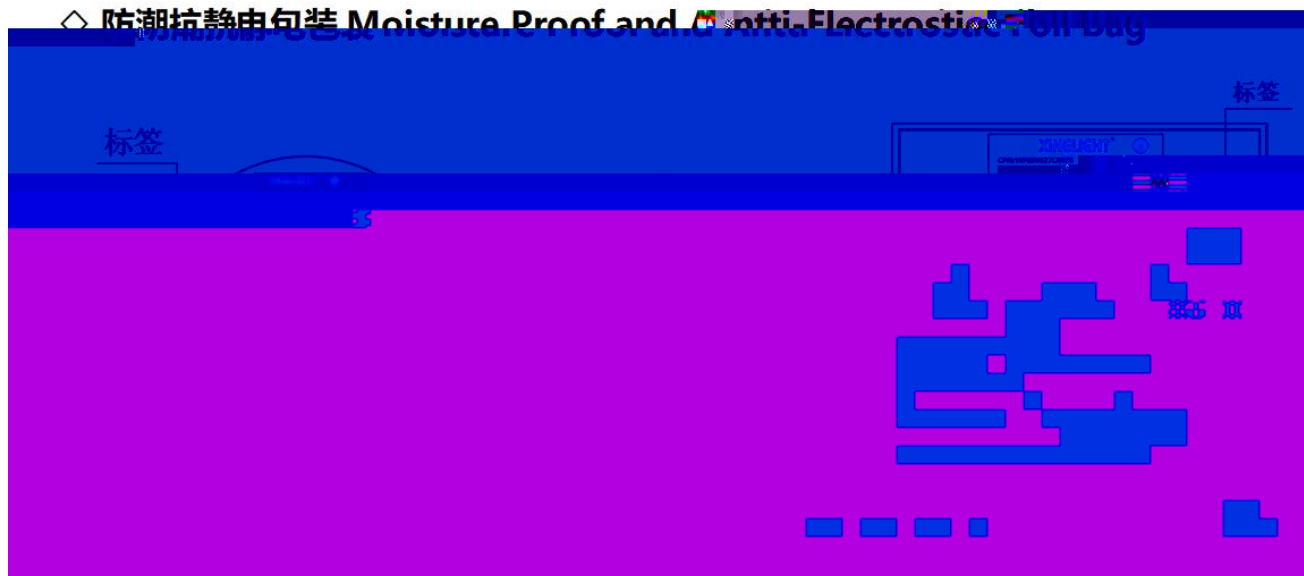


XINGLIGHT™

[illegible]



焊接指导 (2)

Guideline for Soldering (2)

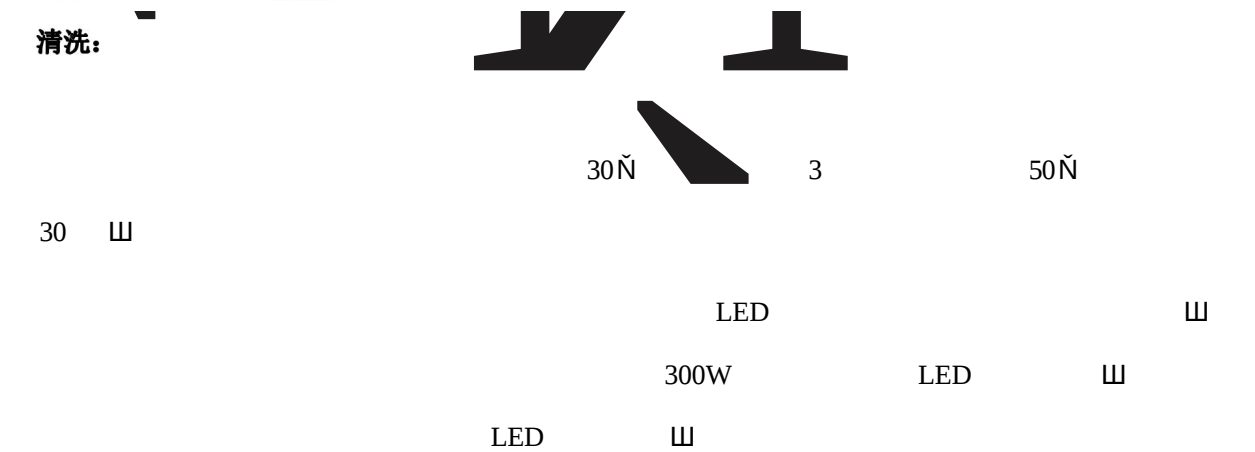

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30N for 3 minutes or 50N for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be higher than 300W. Before cleaning, a pretest should be done to confirm whether any damage to LEDs will occur.

* 注意: PCB

* This general guideline may not apply to all PCB designs and configurations. No all soldering equipment. The technics in practise is influenced by many factors, it should be specialized base





其他事项



眼睛保护忠告



If there are any modifications to the specification sheet, no further notice will be given.