













Part No. : XL-3030RGBW-WS2812B

Date transmission mode

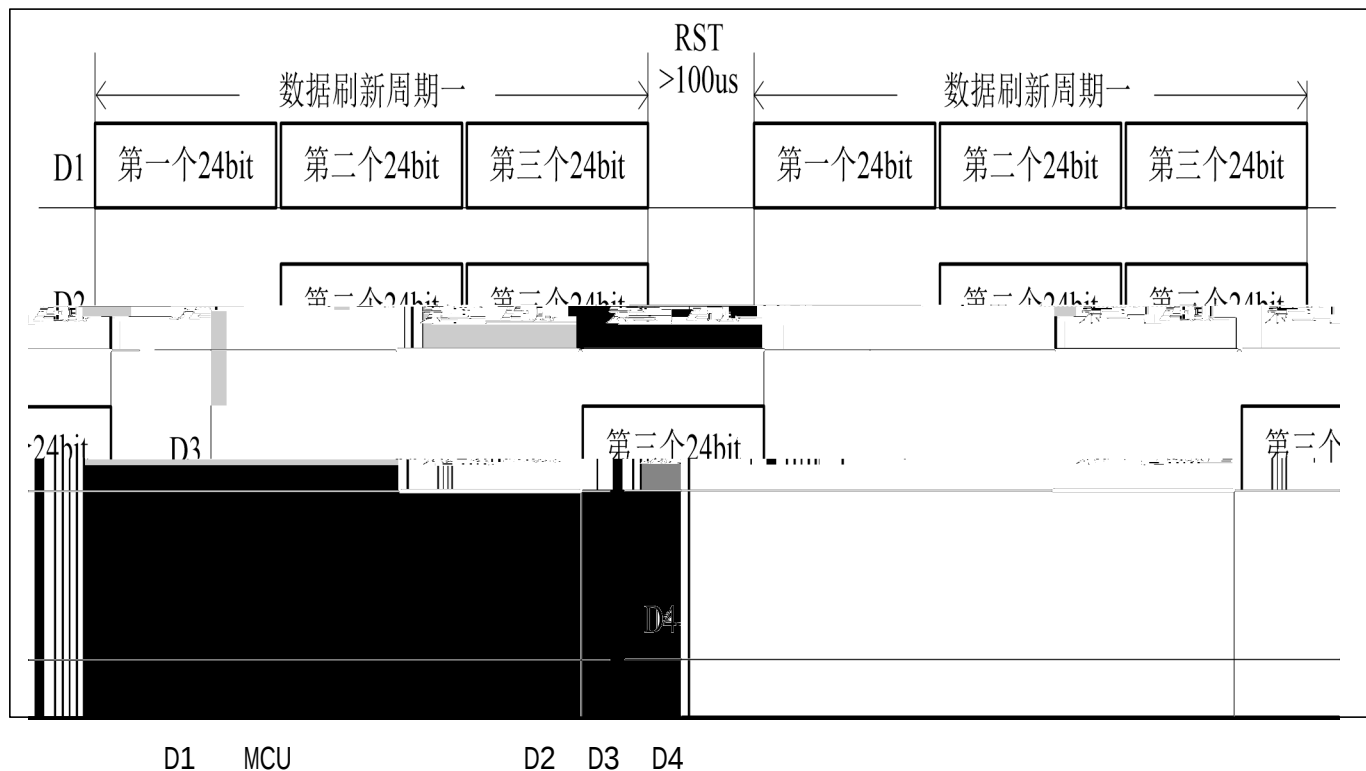


Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit 24bit data structure

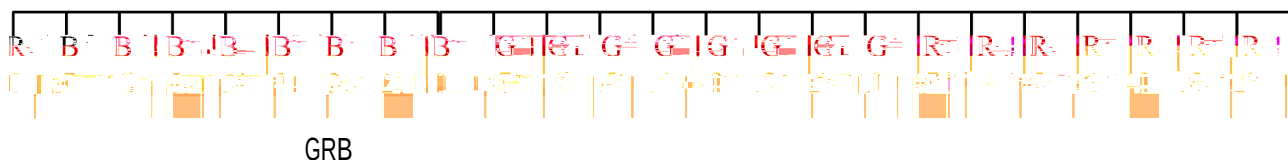

Note: high order first send, send data in the order of GrB

:Time sequence waveform:

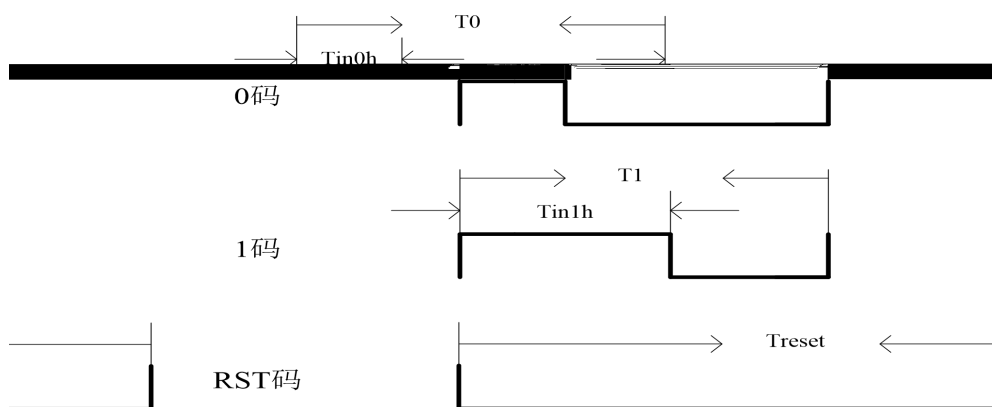

Part No. : XL-3030RGBW-WS2812B











包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

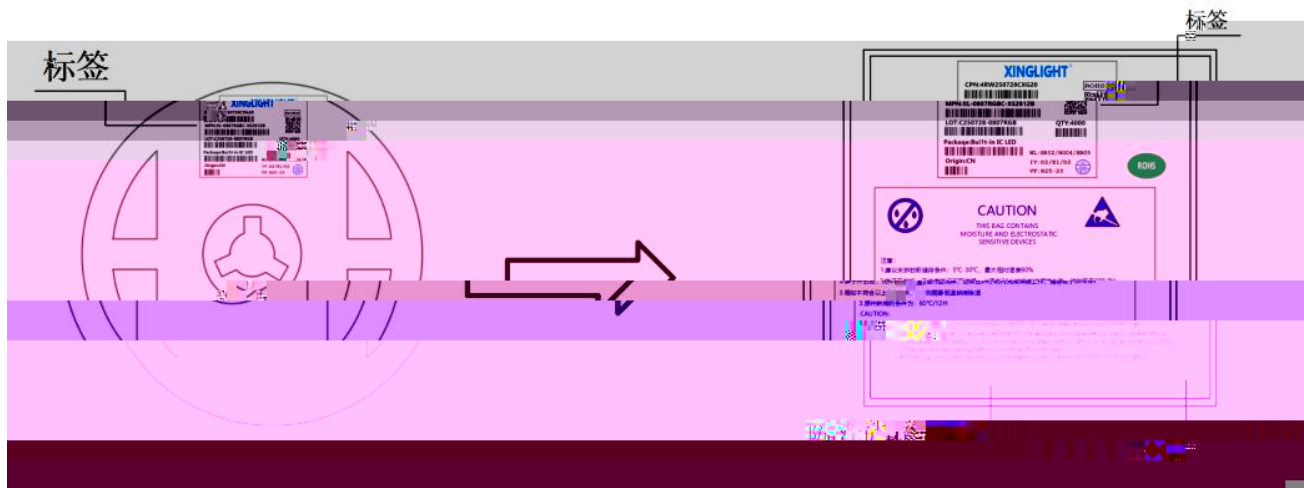

◇ 外包装箱 Cardboard Box

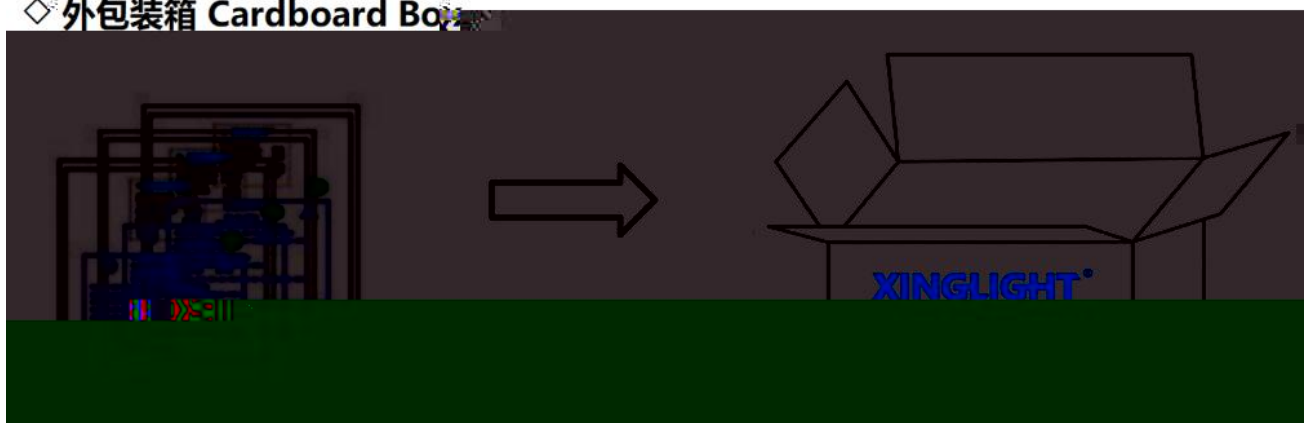

◇ 标签说明 Label Explanation

CPN: 批号/档位		LOT: 日期/封装颜色	XINGLIGHT	
MPN: 型号	VF: 电压代码		CPN:4RW250728CXG20	ROHS
WL: 波长代码	IV: 亮度代码		MPN:XL-0807RC	
			LOT:C250728-0807RGB	QTY:400
			Package built on 06.10.20	

焊接指导 (1)

Guideline for Solder

使用烙铁手工焊接







