



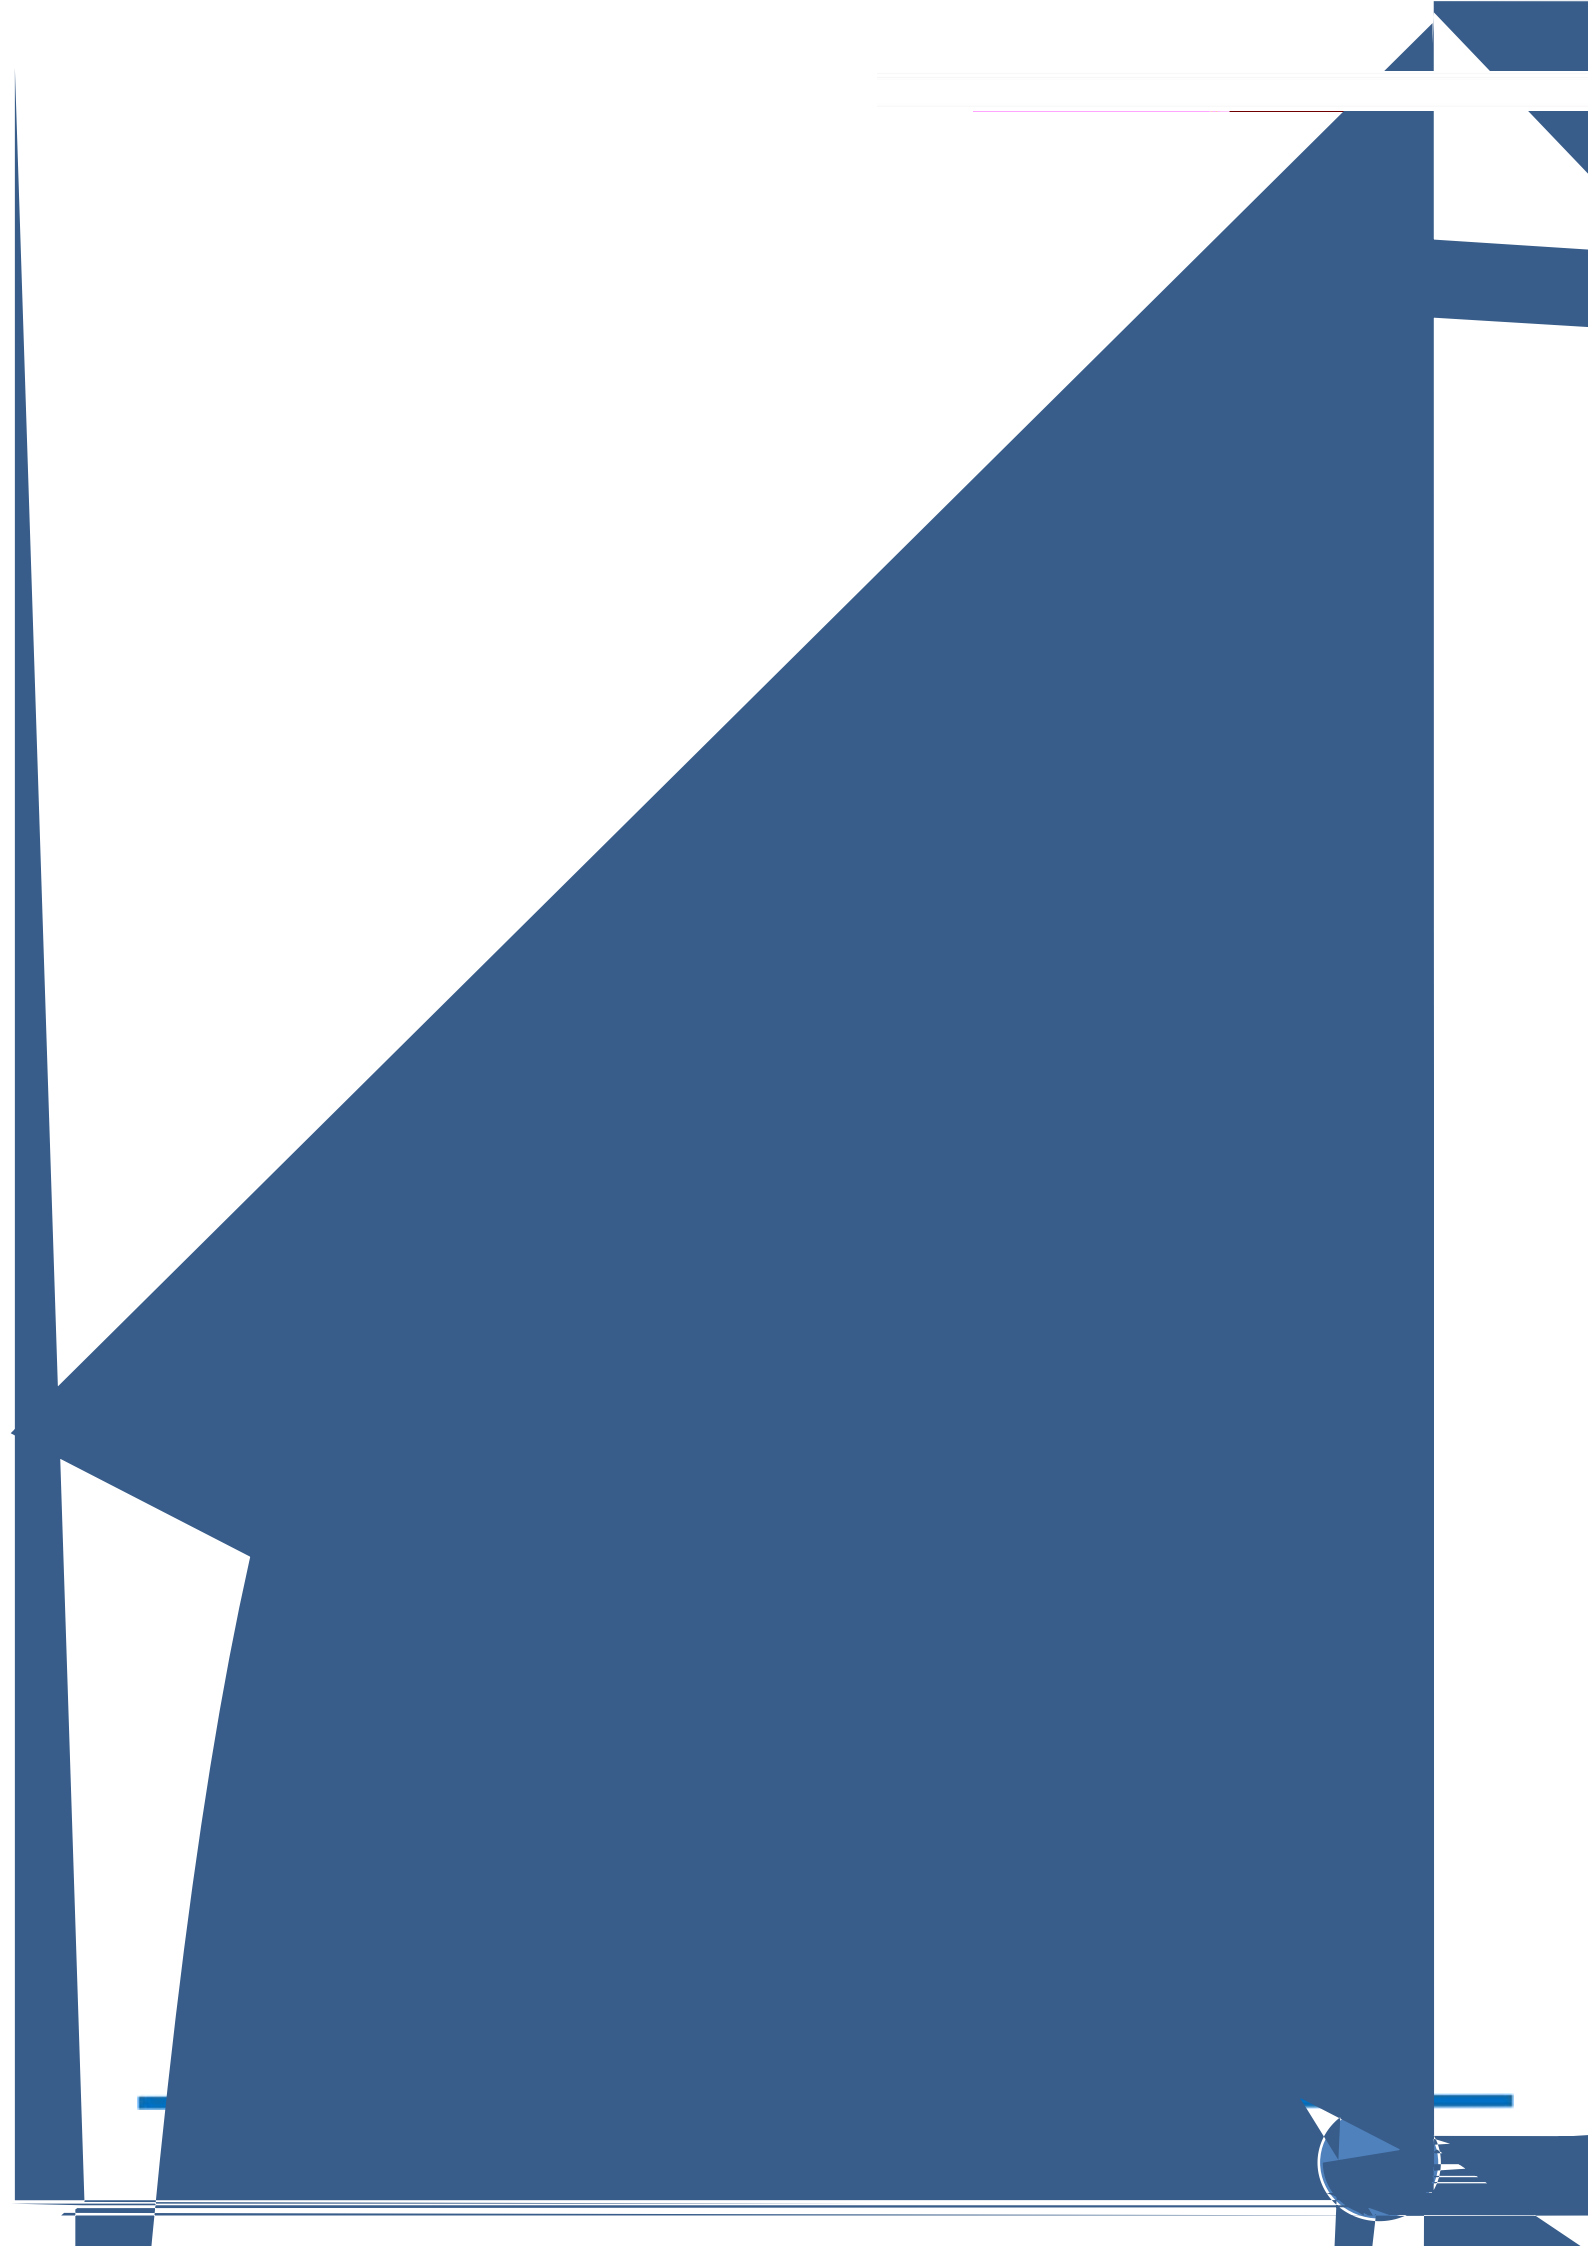


Date transmission mode

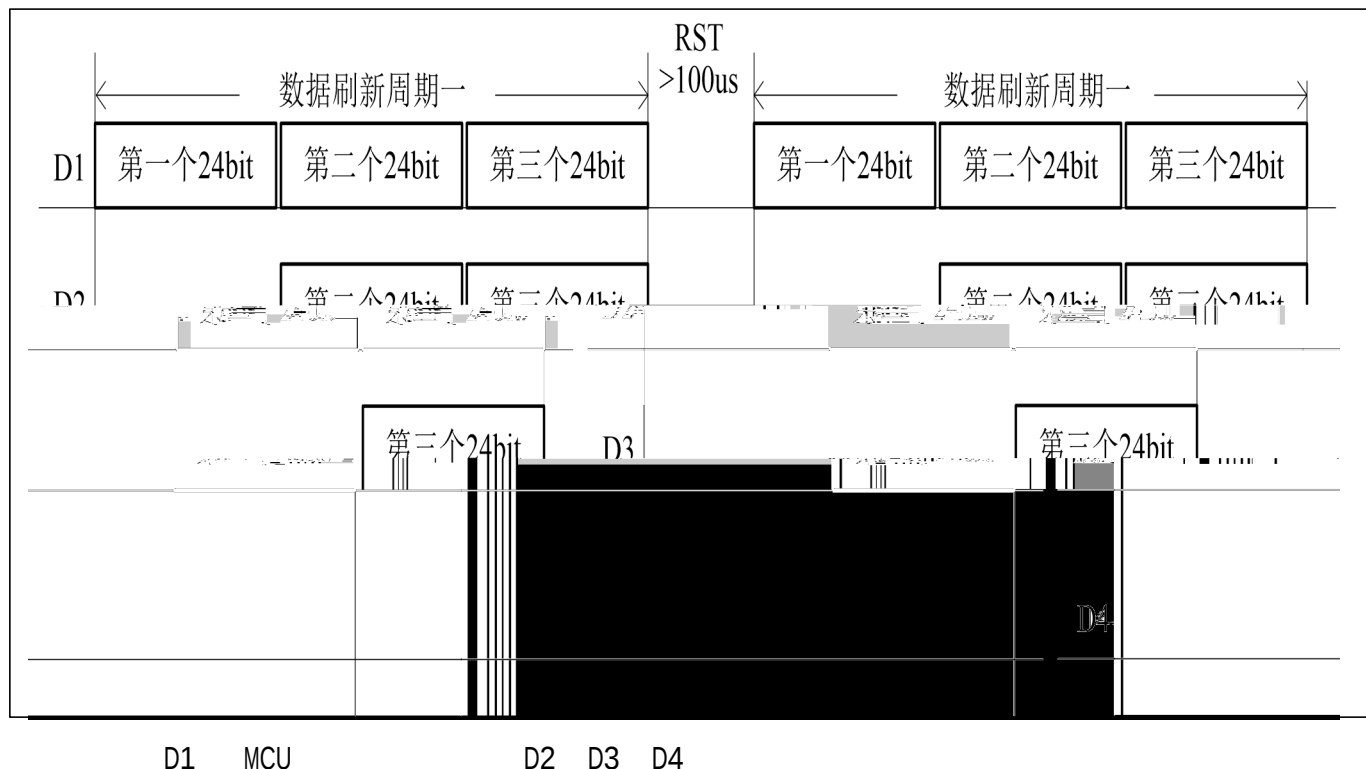

Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit


24bit

24bit data structure

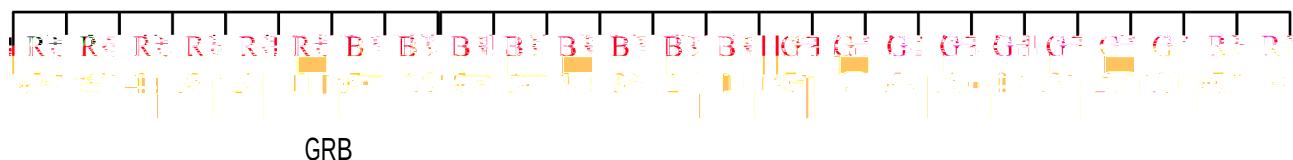

Note: high order first send, send data in the order of GrB

:Time sequence waveform:

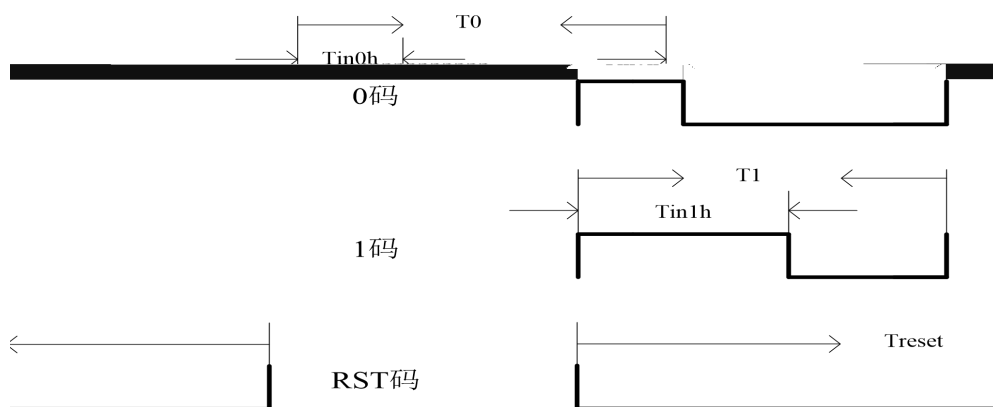








包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

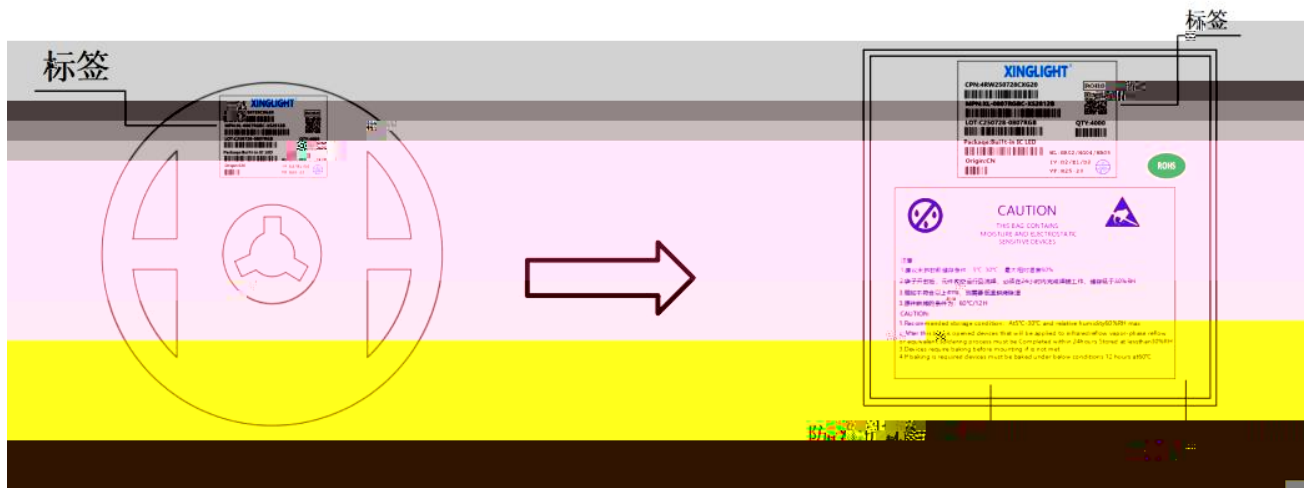

◇ 标签说明 Label Explanation

CPN: 批号/档位		LOT: 日期/封装颜色		XINGLIGHT	
MPN: 型号	VF: 电压代码				
WL: 波长代码	IV: 亮度代码				

焊接指导 (1)

Guideline for Solder

使用烙铁手工焊接







