



WS2812b /

1. 2121 IC RGB LED
2. IC RGB
3.
4. 800Kbps/ 30 / 1024
5. PWM 256 1.5KHz / s
6. 5mA/ <1.5%
<3%
7. VDD 4.5-5.5V 100%
8.

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项











典型特性曲线

Typical Characteristics Curves

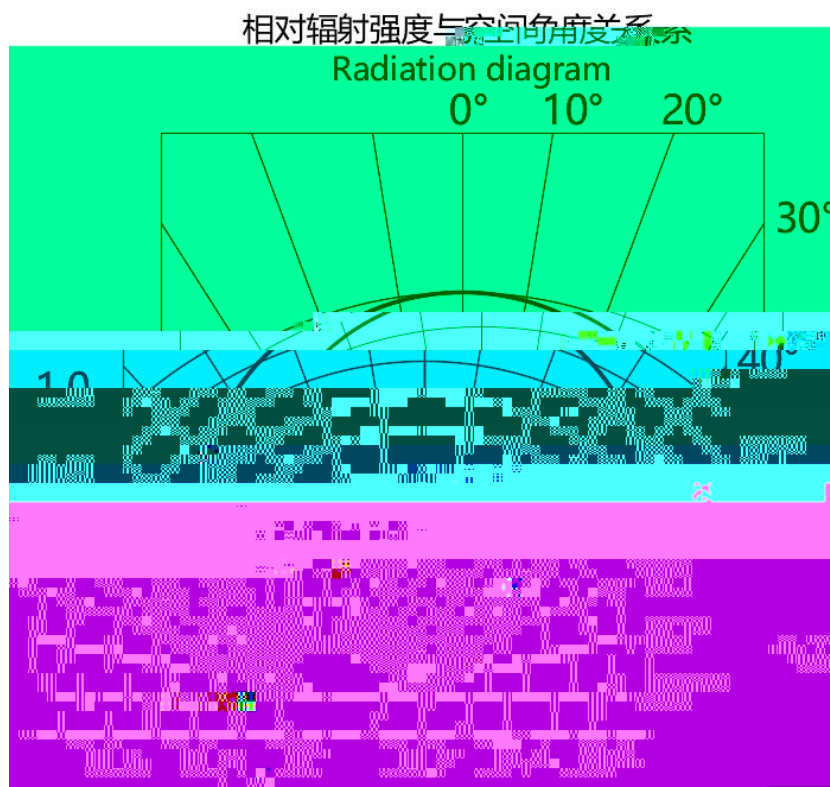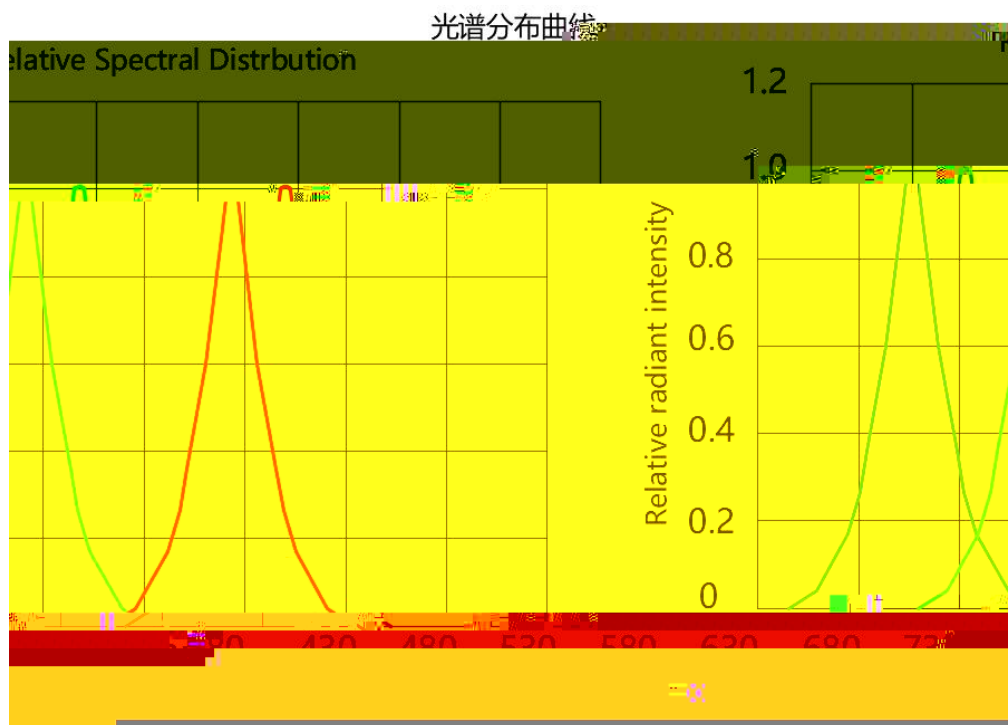


XINGLIGHT

Part No. : XL-2121RGBW-WS2

包装 (1)

Packaging (1)

载带与圆盘尺寸

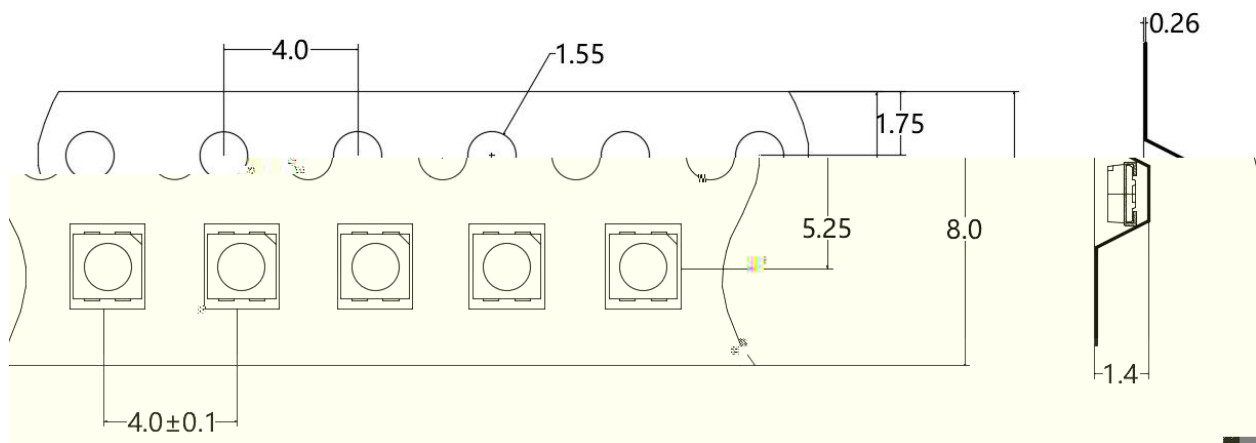

1. mm

Remarks: All dimensions are in millimeters.

2. ±0.25mm

Tolerance is ±0.25mm unless otherwise noted





焊接指导 (1)

Guideline for Solder

使用烙铁手工焊接

30

焊接指导 (2)

Guideline for Soldering (2)

清洗:

* 注意:

PCB

*





