电性参数

ǎ Ta=25 Absolute Maximum Rating(ta=25)

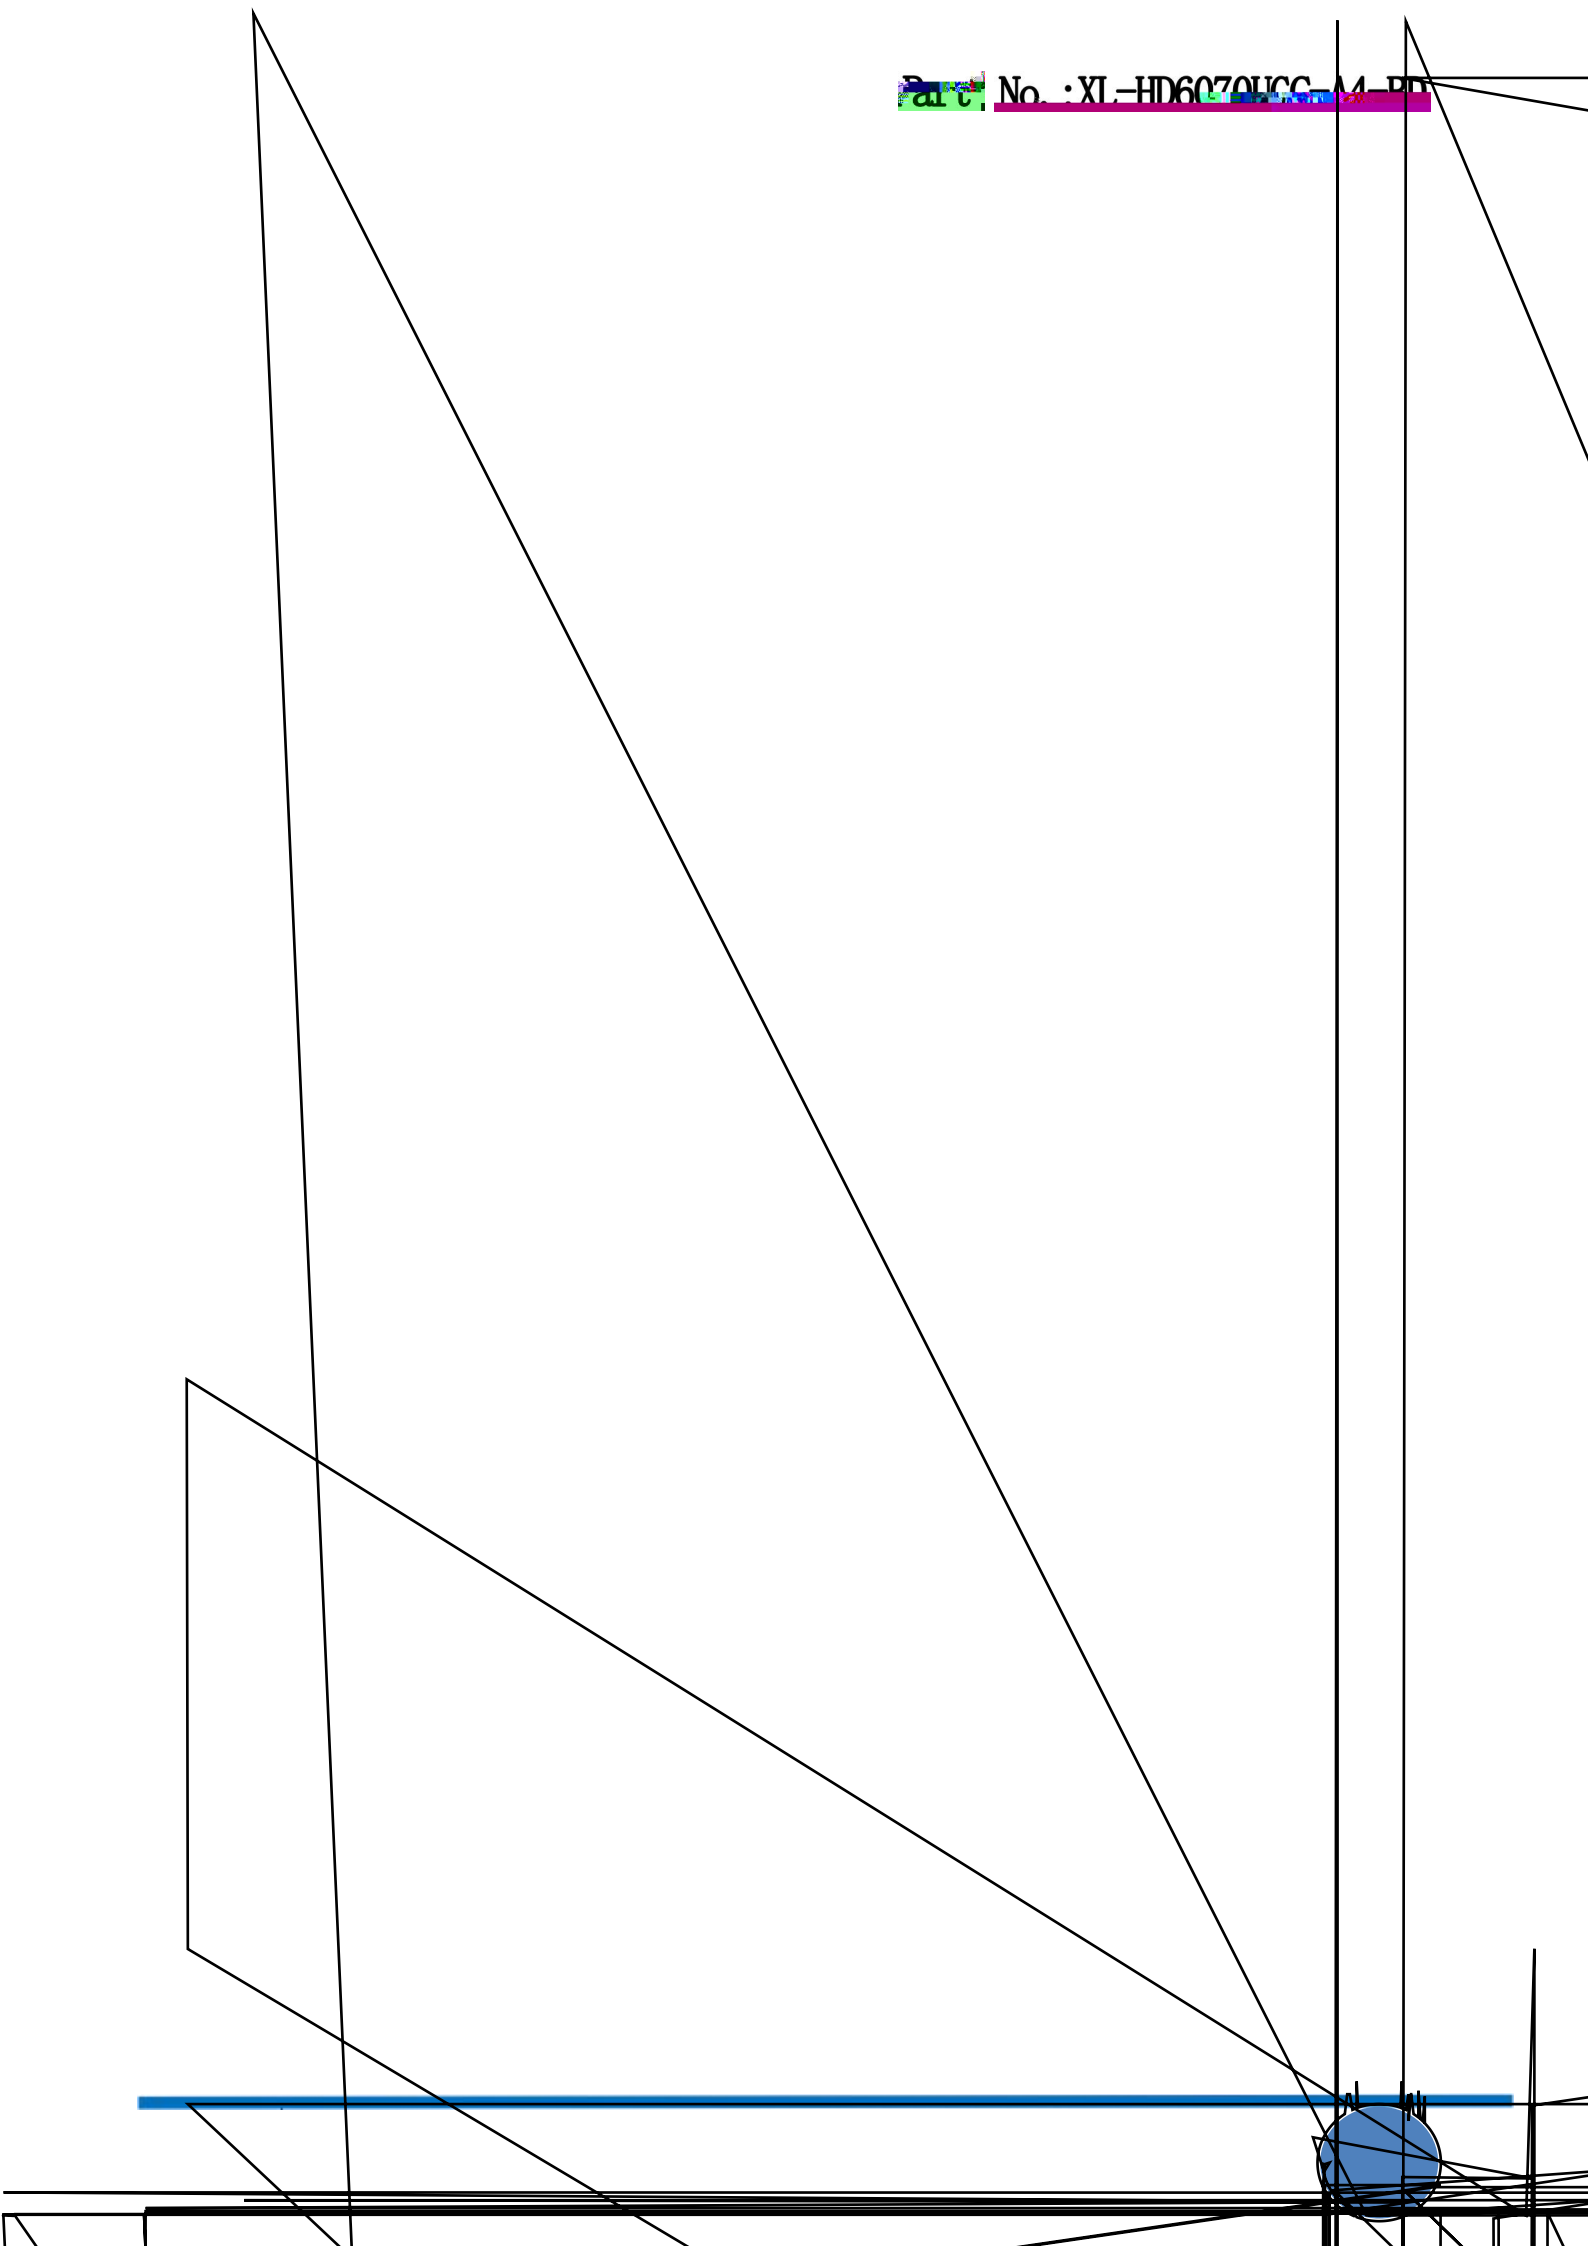

包装（1）

Packaging (1)

载带与圆盘尺寸

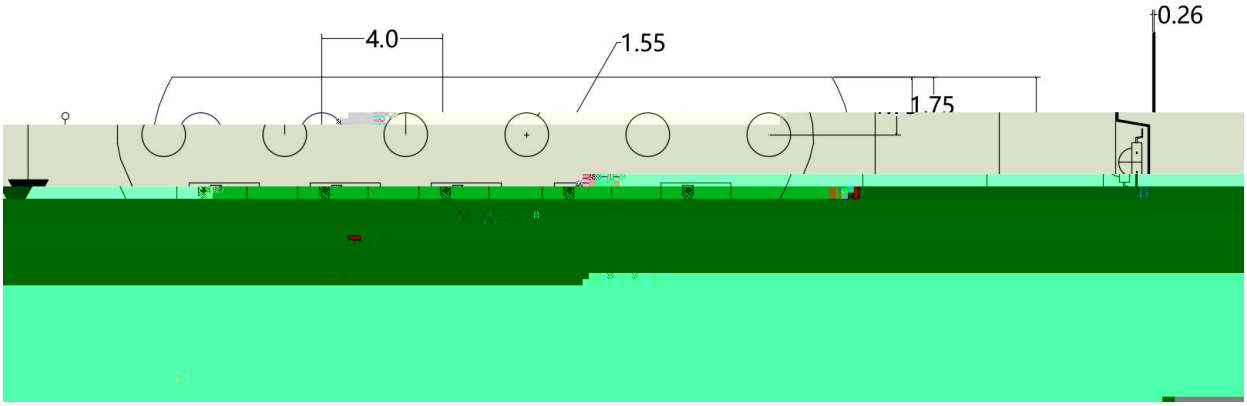

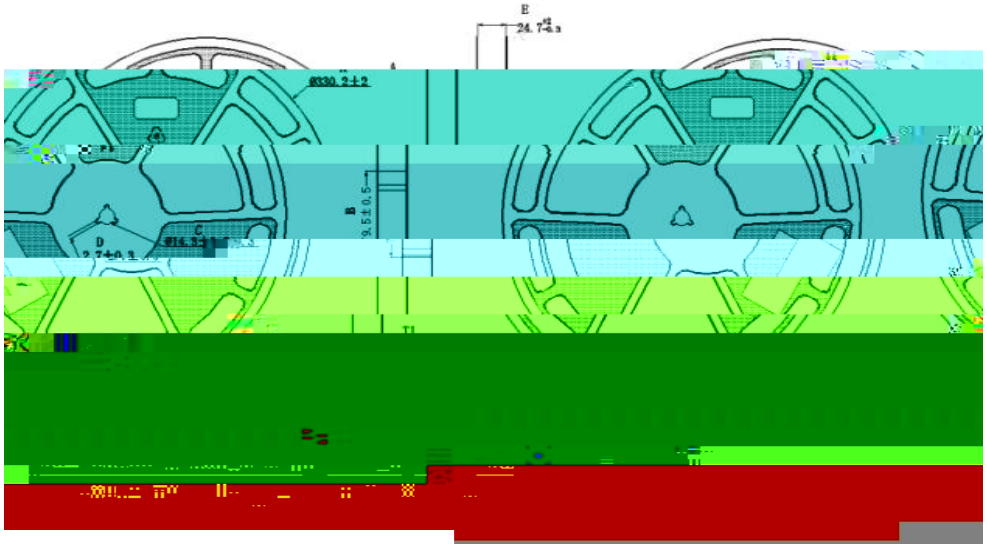

:

1. 丫 β (mm)

1. Size unit is mm (mm).

2. `E ±0.1mm

2. The dimensional tolerance is ± 0.1mm.

圆盘及载带卷出方向及空穴规格 Disk and carrier belt direction of roll and hole dimensions

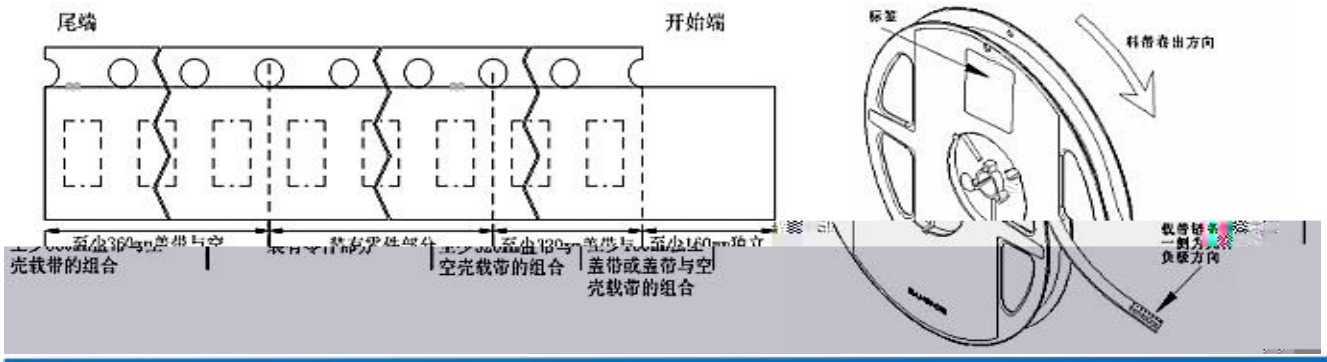

焊接指导（2）

Guideline for Soldering (2)

ضي U ą ضي 30 3 № 50

30

ą ï ╕ ╠ ѽ ą ╕ LED ė №

w 300W

ī

使用注意事项（ ）

其他事项

ǔ ج ˜ غج ج ǐ ۱ ز ˜ ذ ṗ
غ غج ~ ج ٧ ۱ ز ≠ ج ᴅ غجضي

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED № ~ ﻁﻫ r ⌂ № ضي ǔ
Ṛ

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

眼睛保护事项

LED ǔ ѽ ~ ǔ ѽ ѽ ≠ ѽ LED ѽ̂ ѧ

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

ḱ ɜ
If there are any modifications to the specification sheet, no further notice will be given