











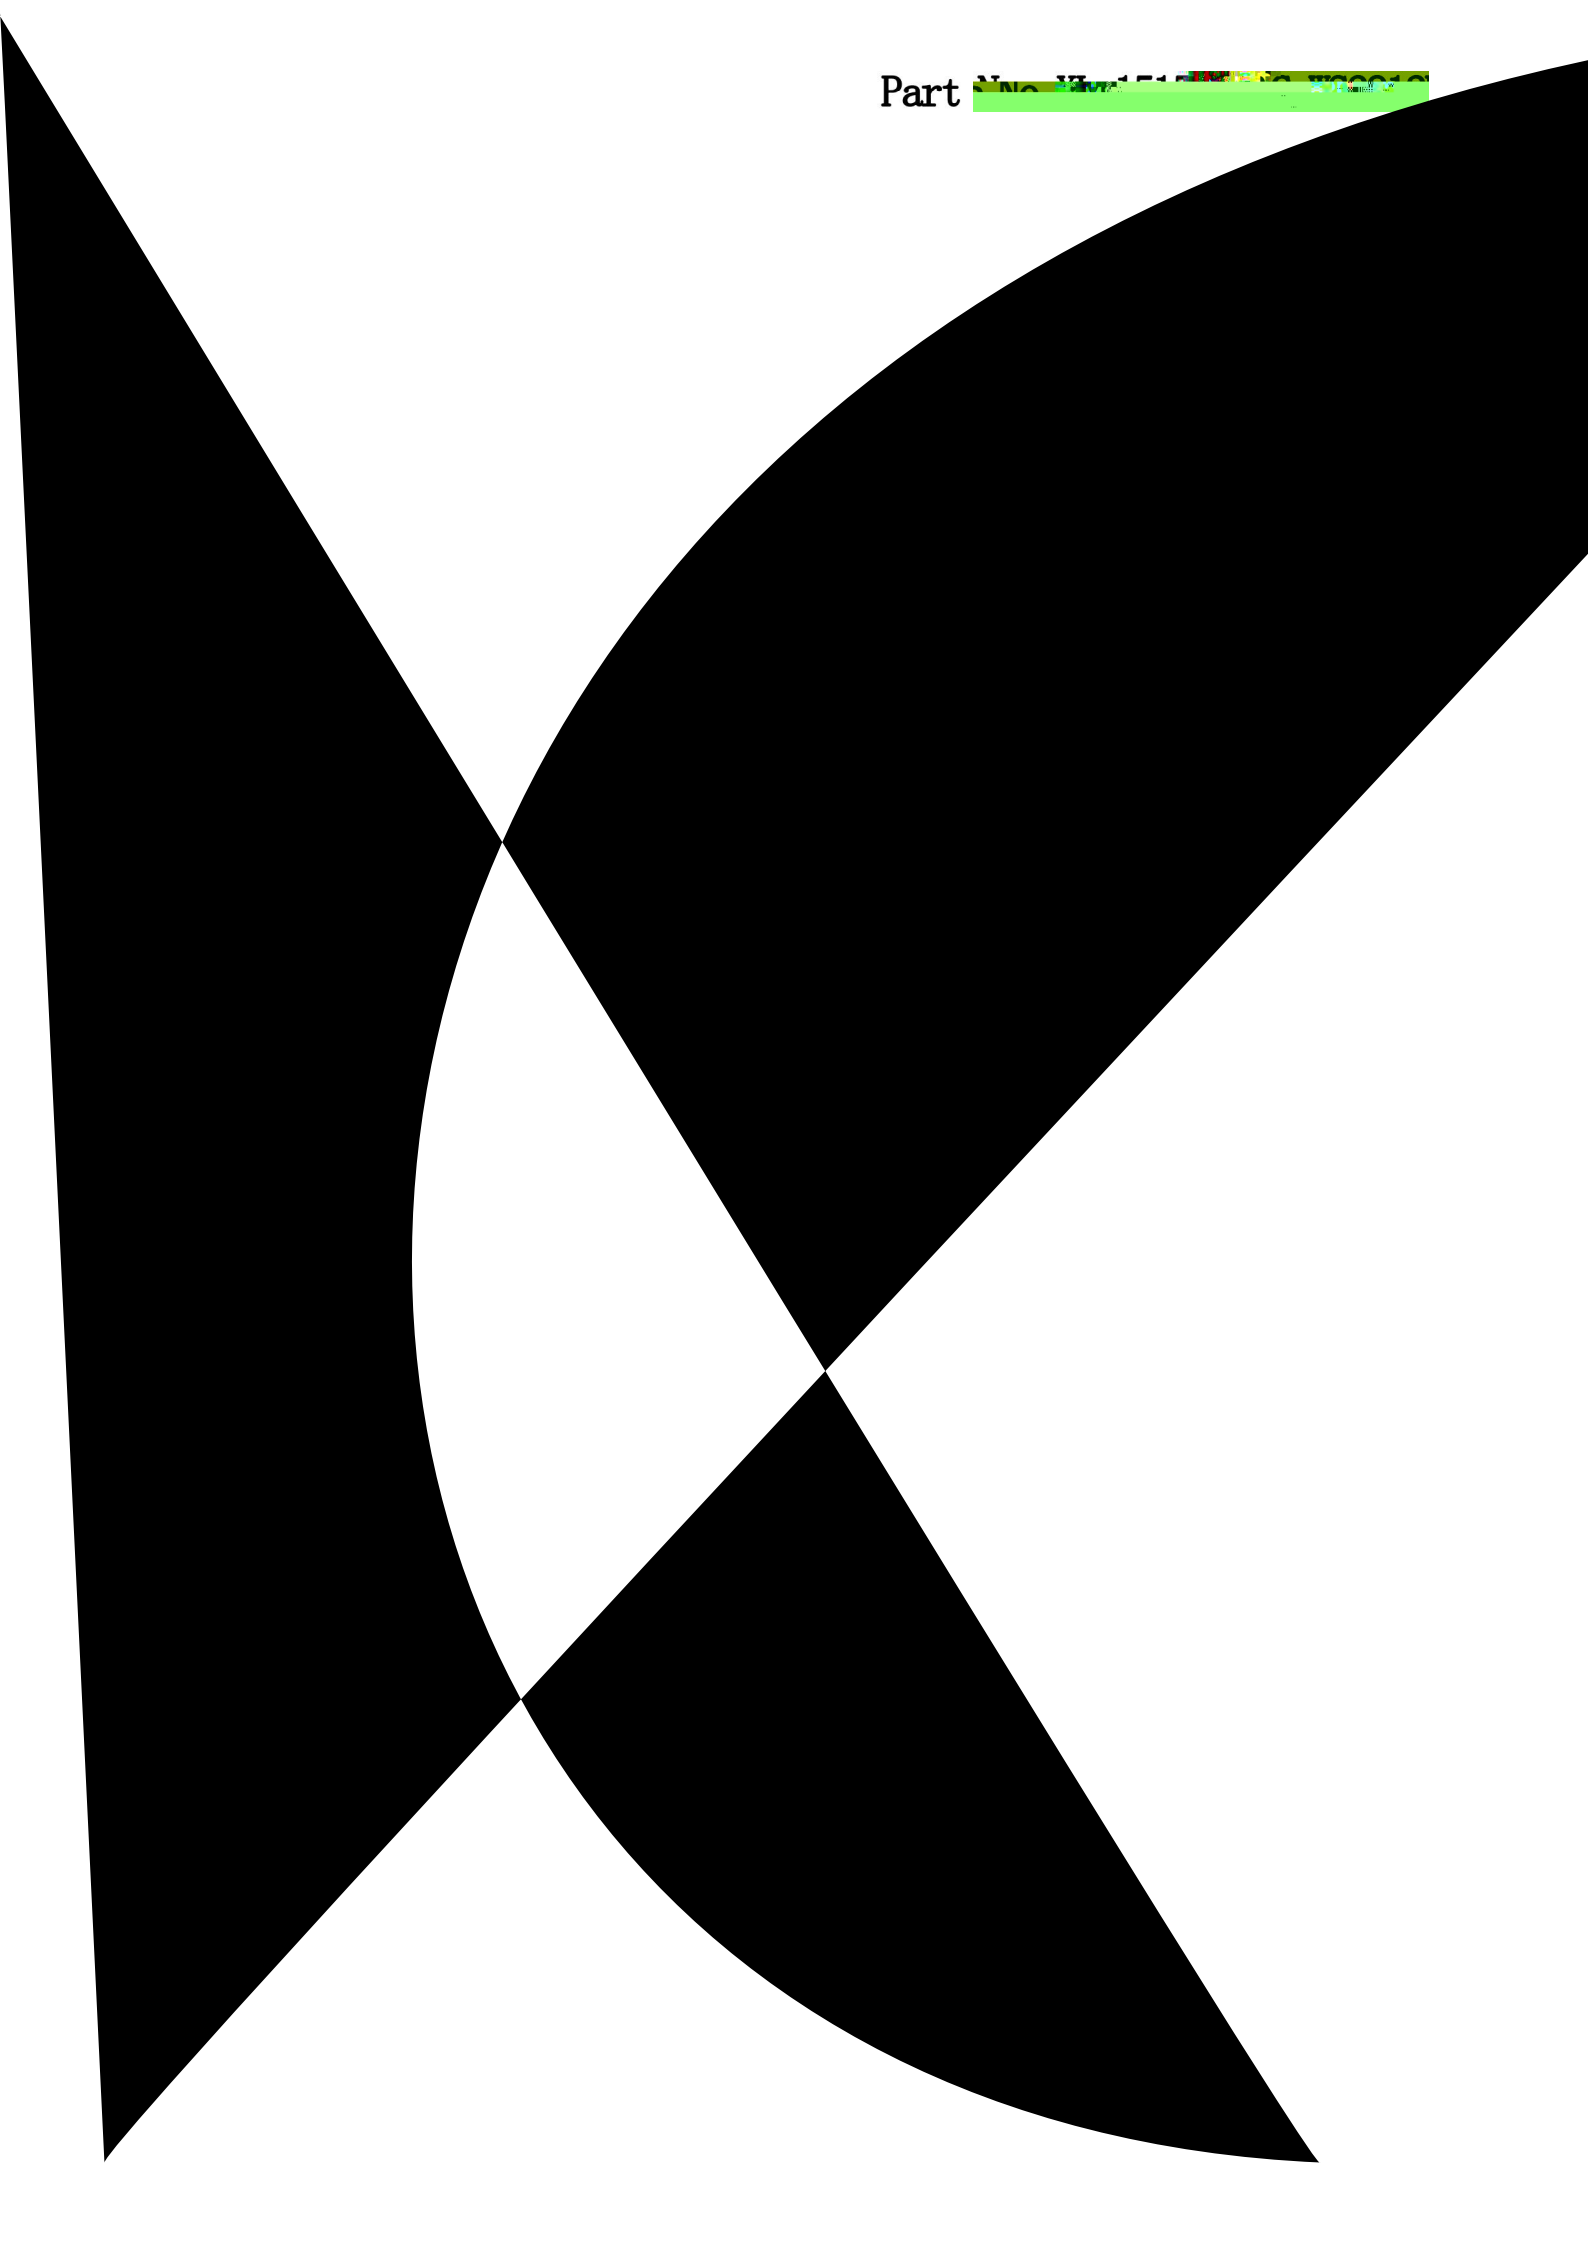




Date transmission mode

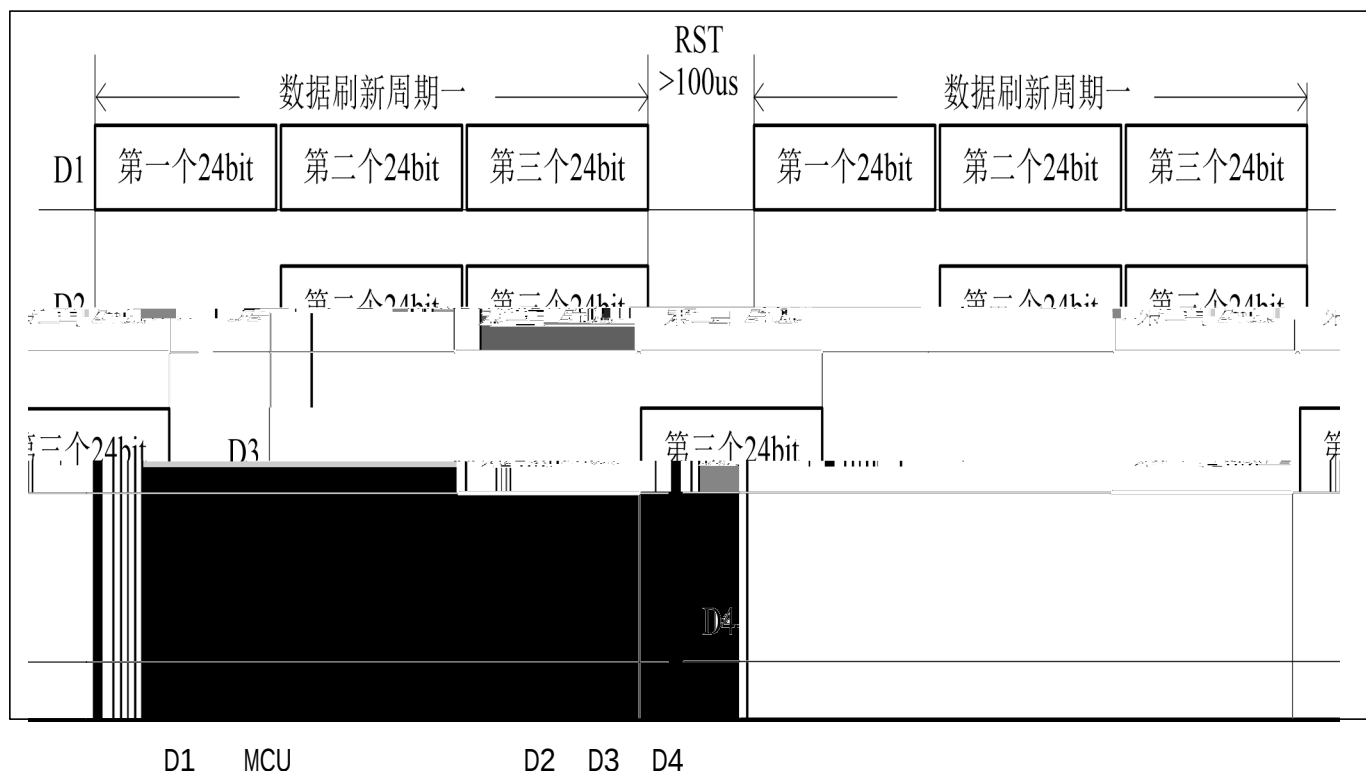

Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit


24bit

24bit data structure

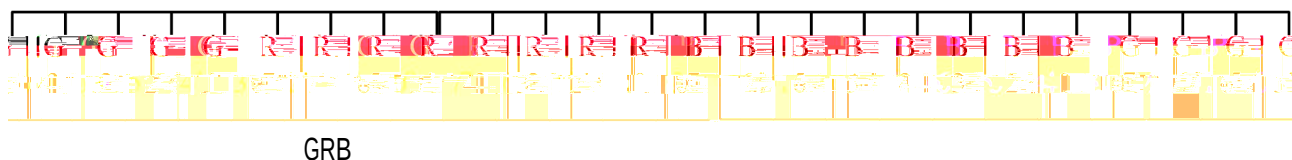

Note: high order first send, send data in the order of GrB

:Time sequence waveform:




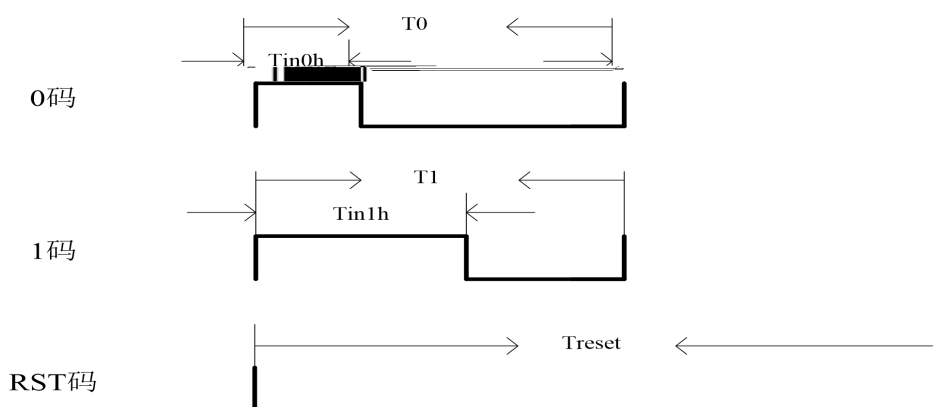






外形尺寸

Outline Dimension

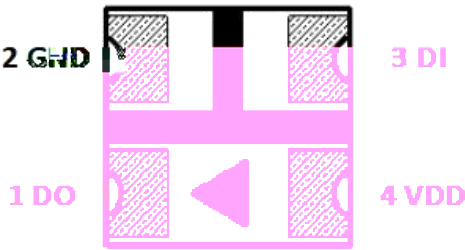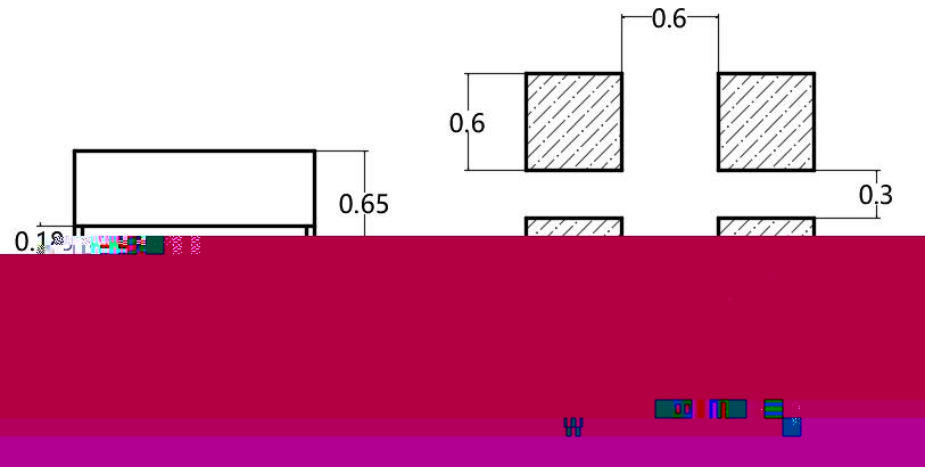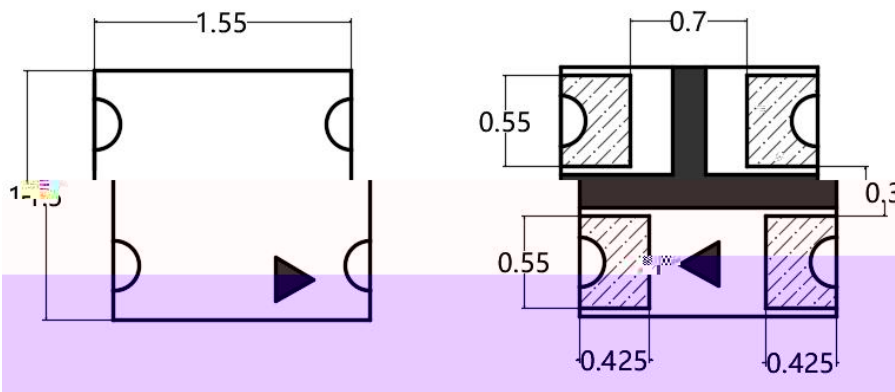

±0.1mm

±


		IC RGB




包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

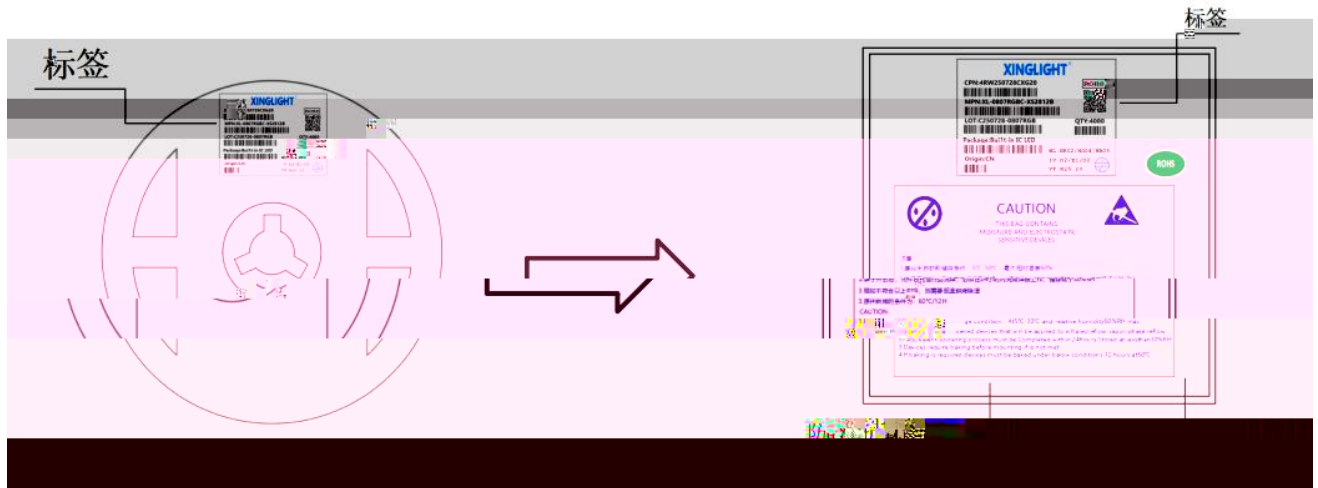

◇ 外包装箱 Cardboard Box

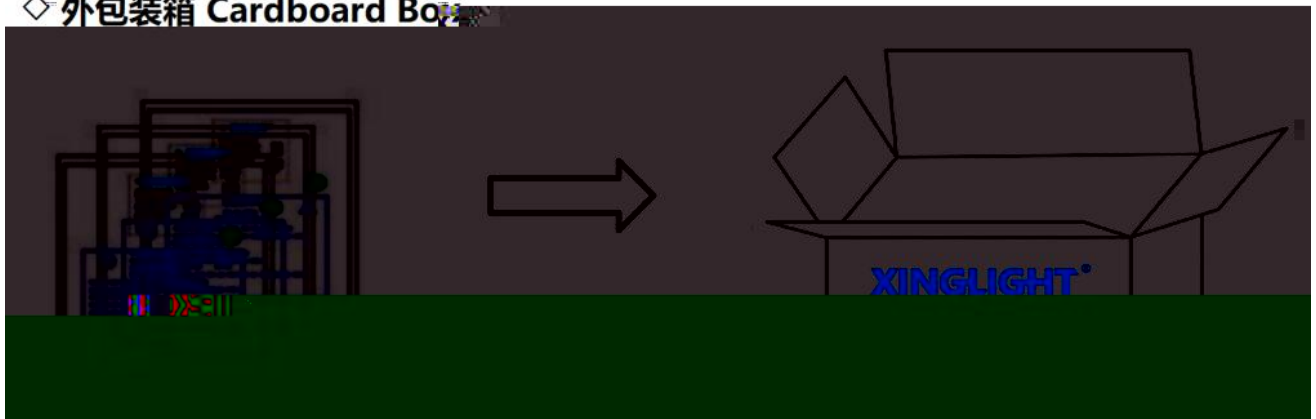

◇ 标签说明 Label Explanation

CPN: 批号/档位		LOT: 日期/封装颜色		XINGLIGHT®	
MPN: 型号		VF: 电压代码		CPN: 4RW250728CXG20	ROHS
WL: 波长代码		IV: 亮度代码		MPN: XL-0807RGB	QTY: 400
				LOT: C250728-0807RGB	
				Package	

焊接指导 (1)

Guideline for Soldering (1)

使用烙铁手工焊接

