









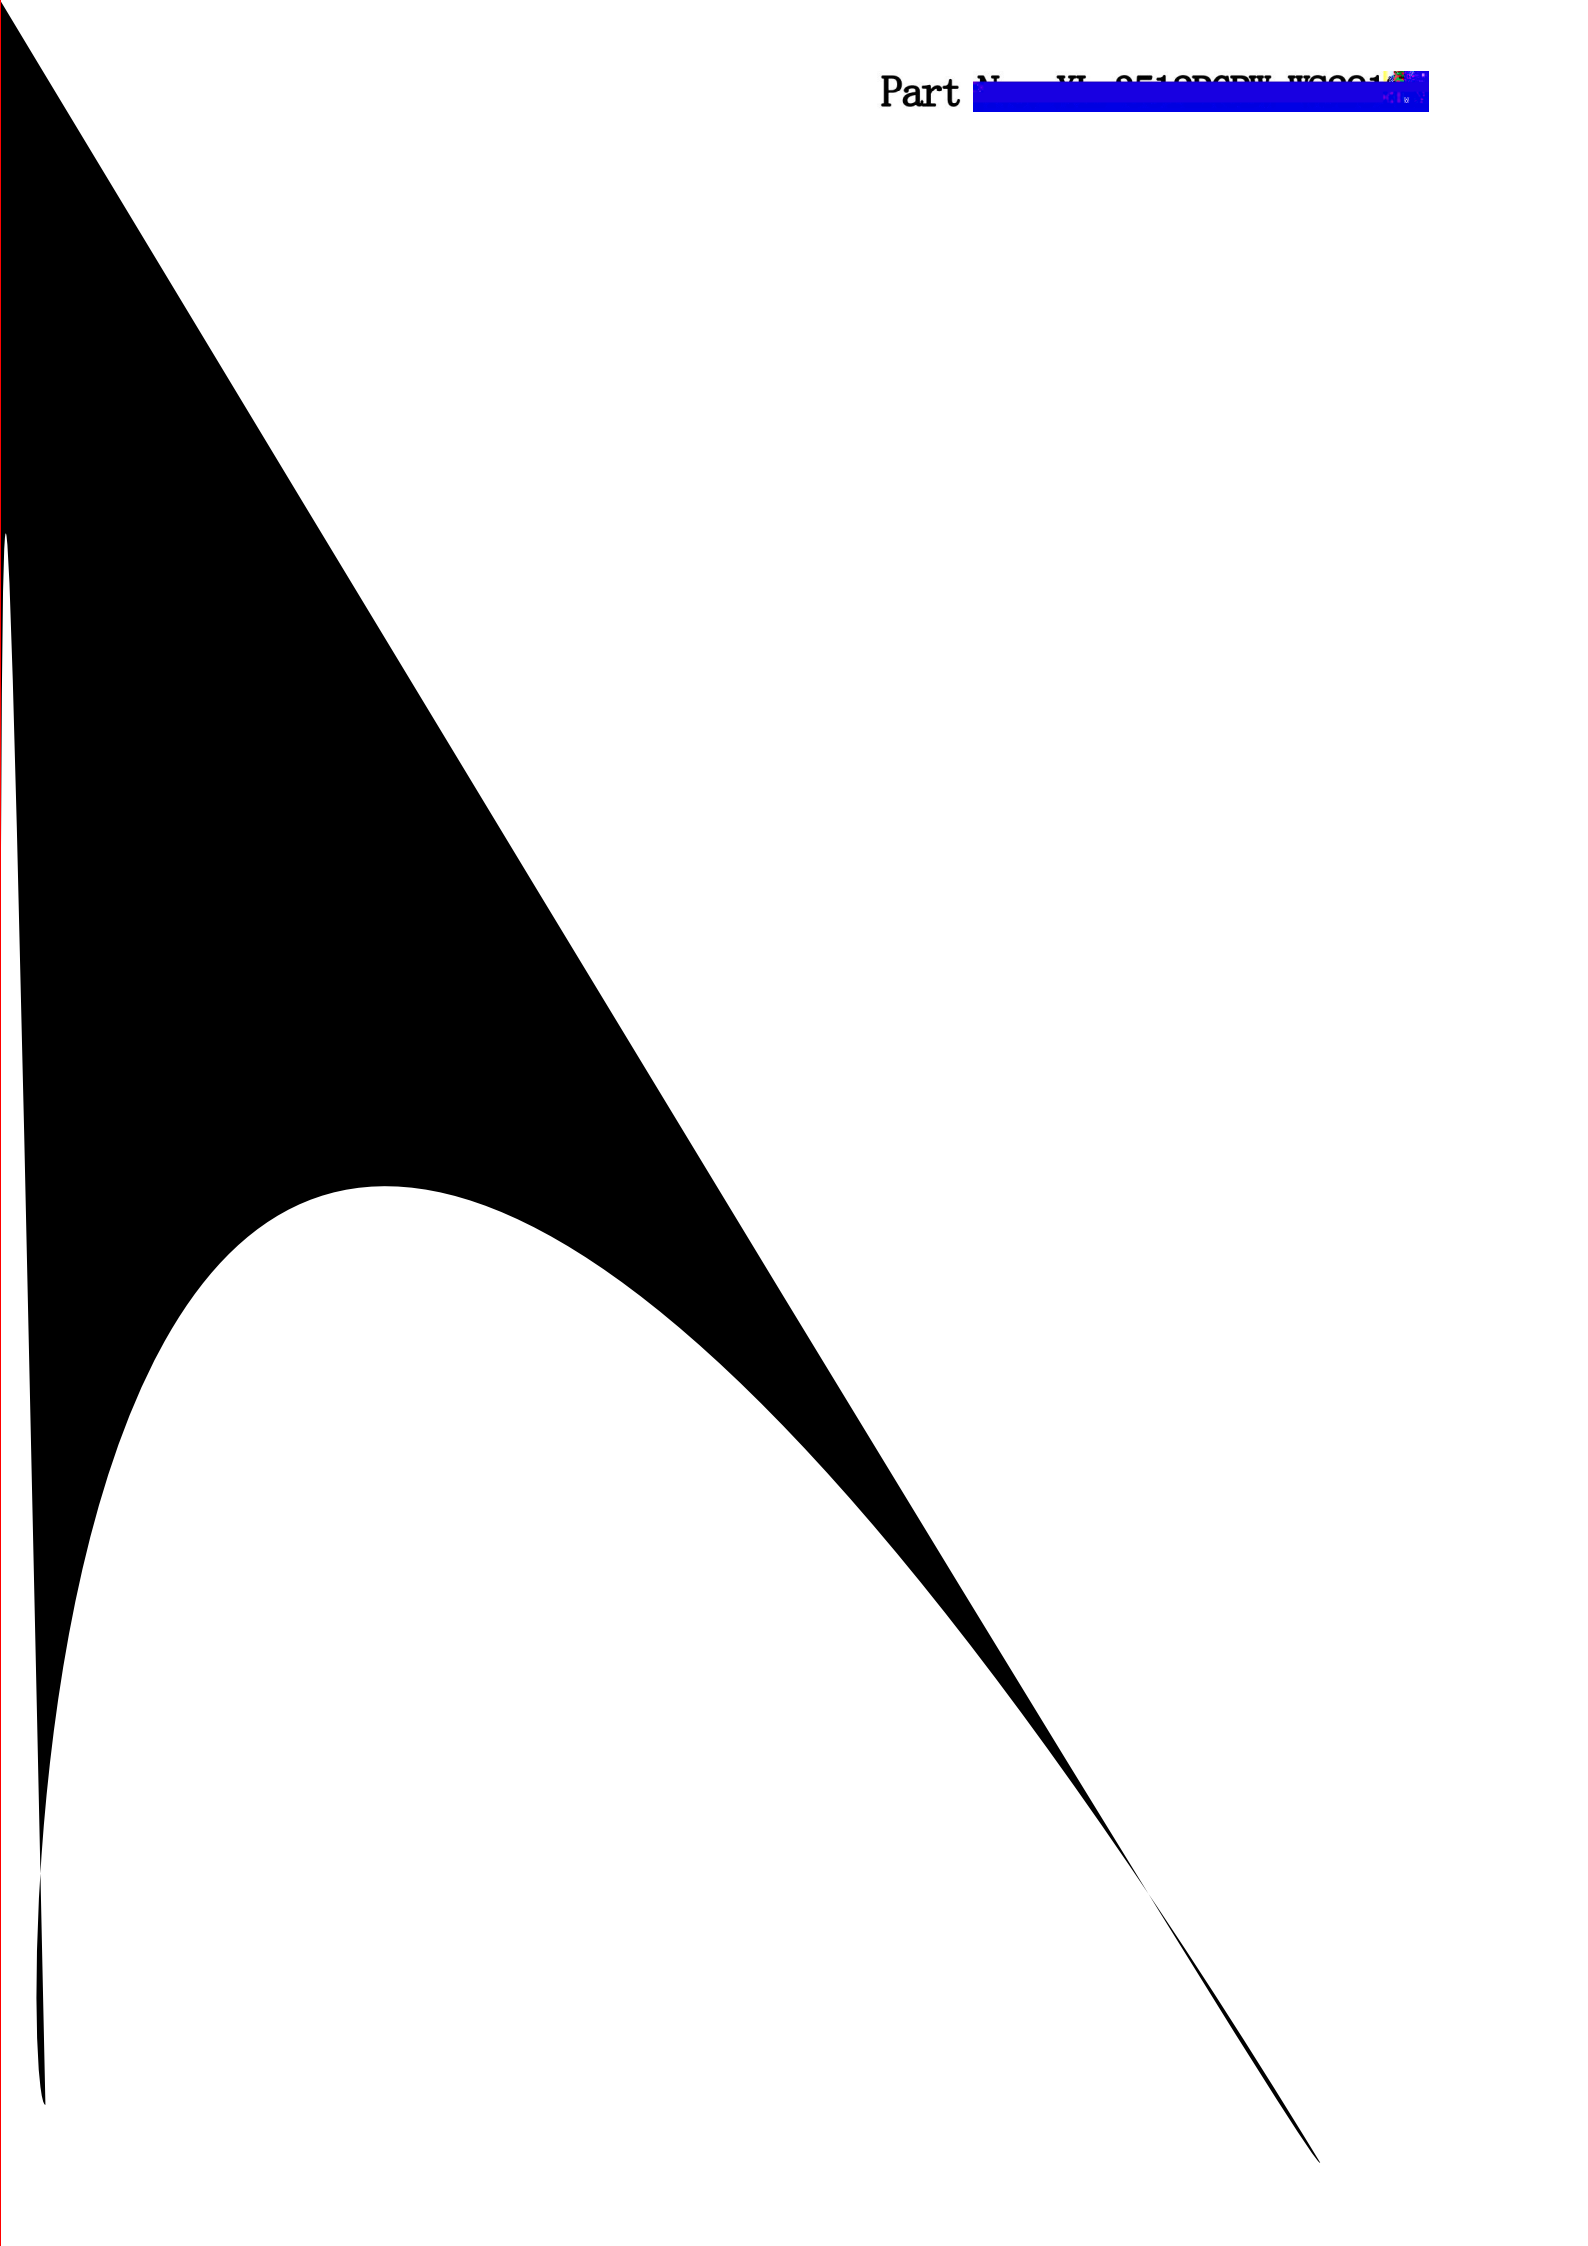


Date transmission mode

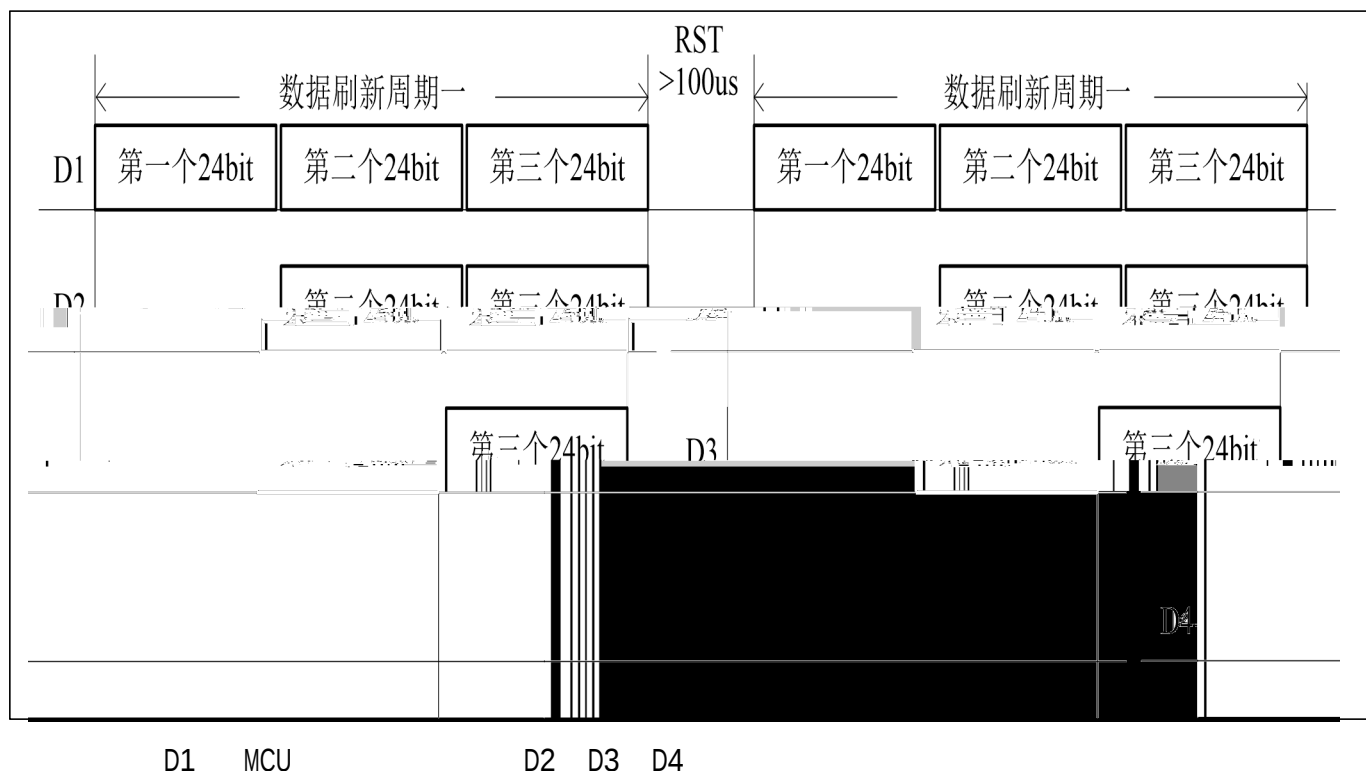


Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit 24bit data structure

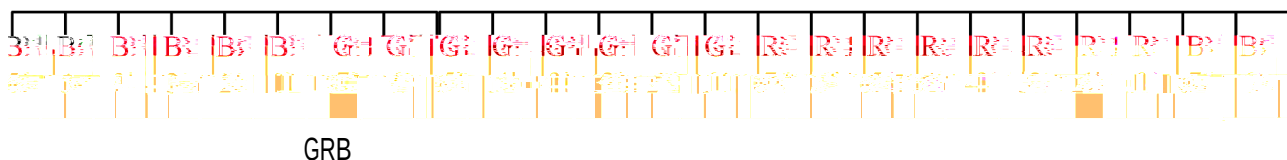



Note: high order first send, send data in the order of GrB

:Time sequence waveform:

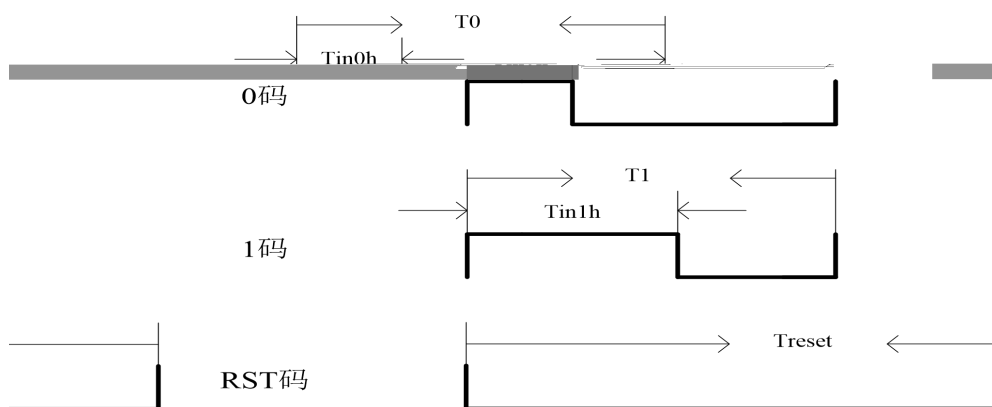

典型特性曲线

Typical Characteristics Curves

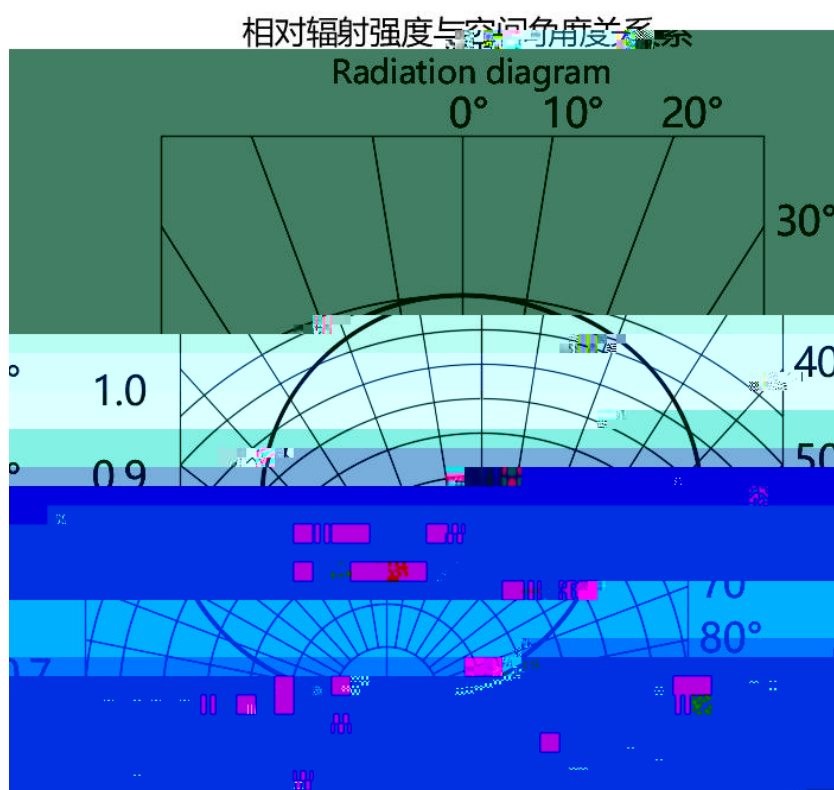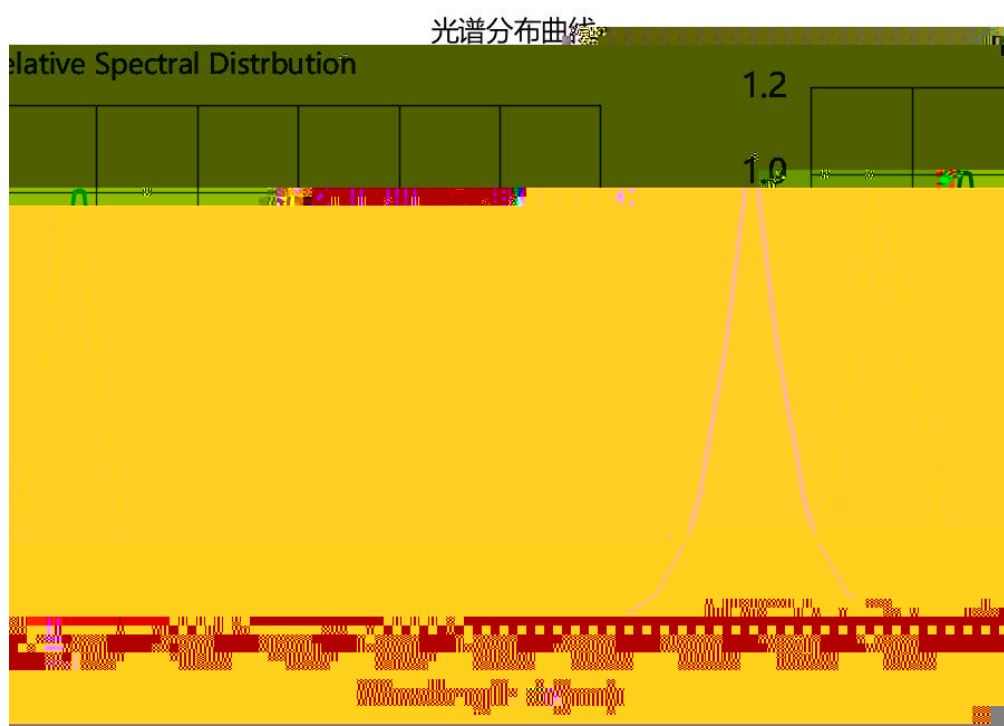






包装 (2)

Packaging (2)

◇ 防潮防静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

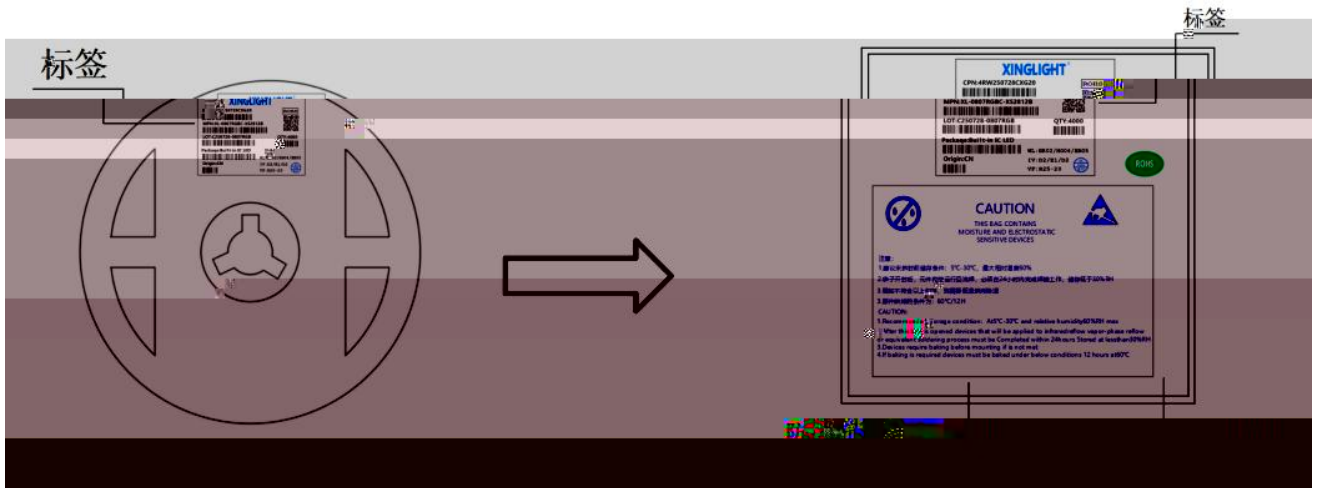

◇ 防潮防静电包装 Moisture Proof and Antti-Electrostatic Foil Bag



◇ 标签说明 Label Explanation





Guideline for Solder

烙铁入手焊接

30 W

300

3

LED

Manual welding is recommended only for repair and heavy industry situations. A soldering iron of less than 30W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering iron under 300 while soldering. Each terminal of the LED is to go for less than 3 second and for one time only. Be careful because the damage of the product is often started at the time of the hand soldering.

烙铁入手焊接

During the conditions shown in the under Figure of Pb-Free Reflow Soldering.

