





目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装


焊接指导

使用注意事项






Date transmission mode

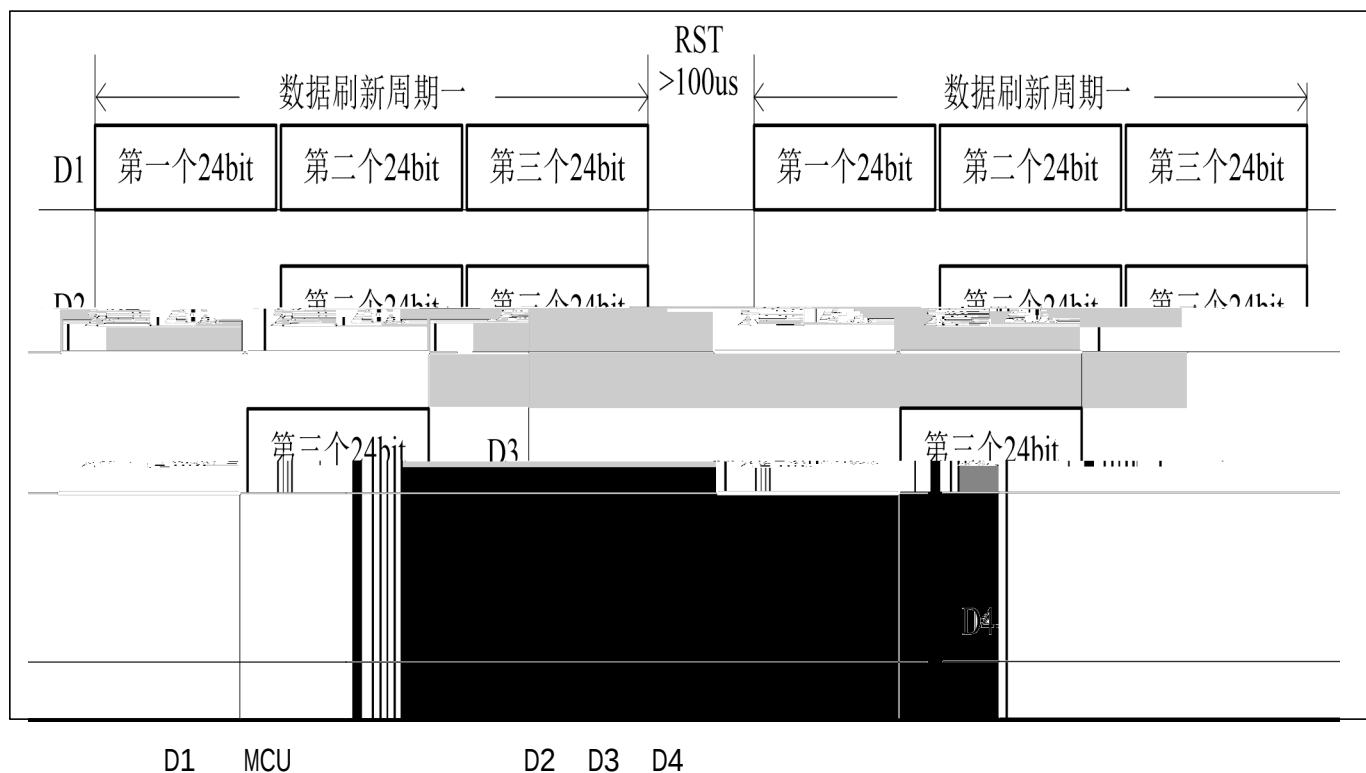


Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit 24bit data structure

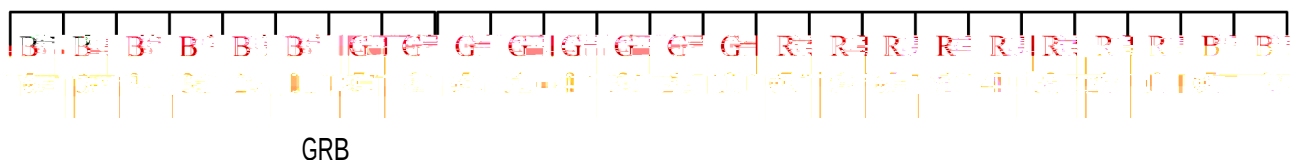

Note: high order first send, send data in the order of GrB

Time sequence waveform:

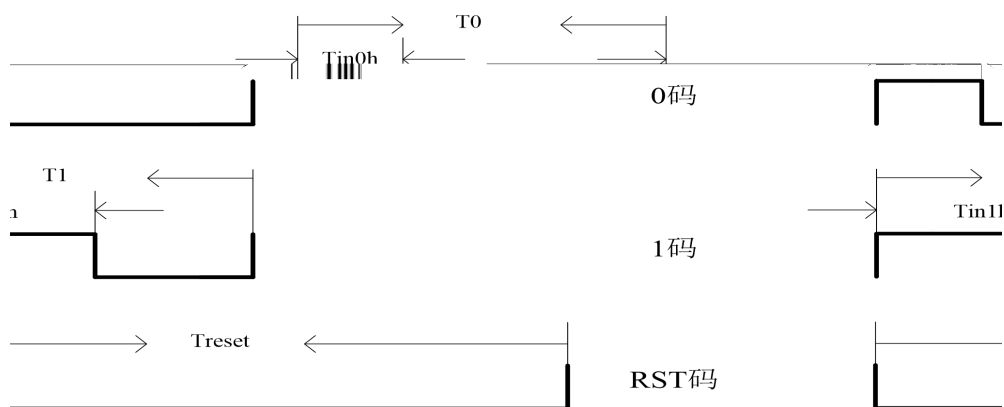










包装 (2)

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

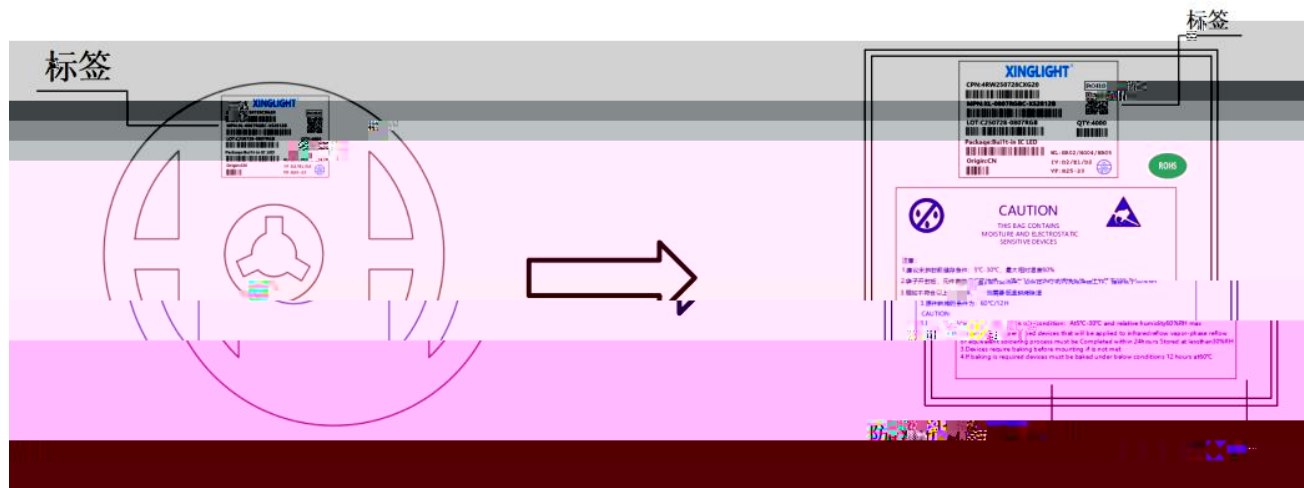

◇ 标签说明 Label Explanation

CPN: 批号/档位		LOT: 日期/封装颜色	XINGLIGHT®	
MPN: 型号		VF: 电压代码	CPN:4RW250728CXG20	ROI
WL: 波长代码		IV: 亮度代码	MPN:XL-0807RC	QTY:400
			LOT:0250728-0807RC	

焊接指导 (1)

Guideline for Solder

使用烙铁手工焊接

严禁手入灯腔内





