6070[redacted](0.5W) 发光二极管

特点（C ）：

*

*

*

*

* MSL :3

*

* SMT

* ≤220

≤220

应用领域（P ）：

* , ,

Building lighting, wall washing, and projection lights

* ,

Urban lighting, sculpture lighting

* stage lights;,

Billboard lighting

*

Exhibition, sports venues, shopping malls

*

mass transit

*



Part No. :XL-[illegible]

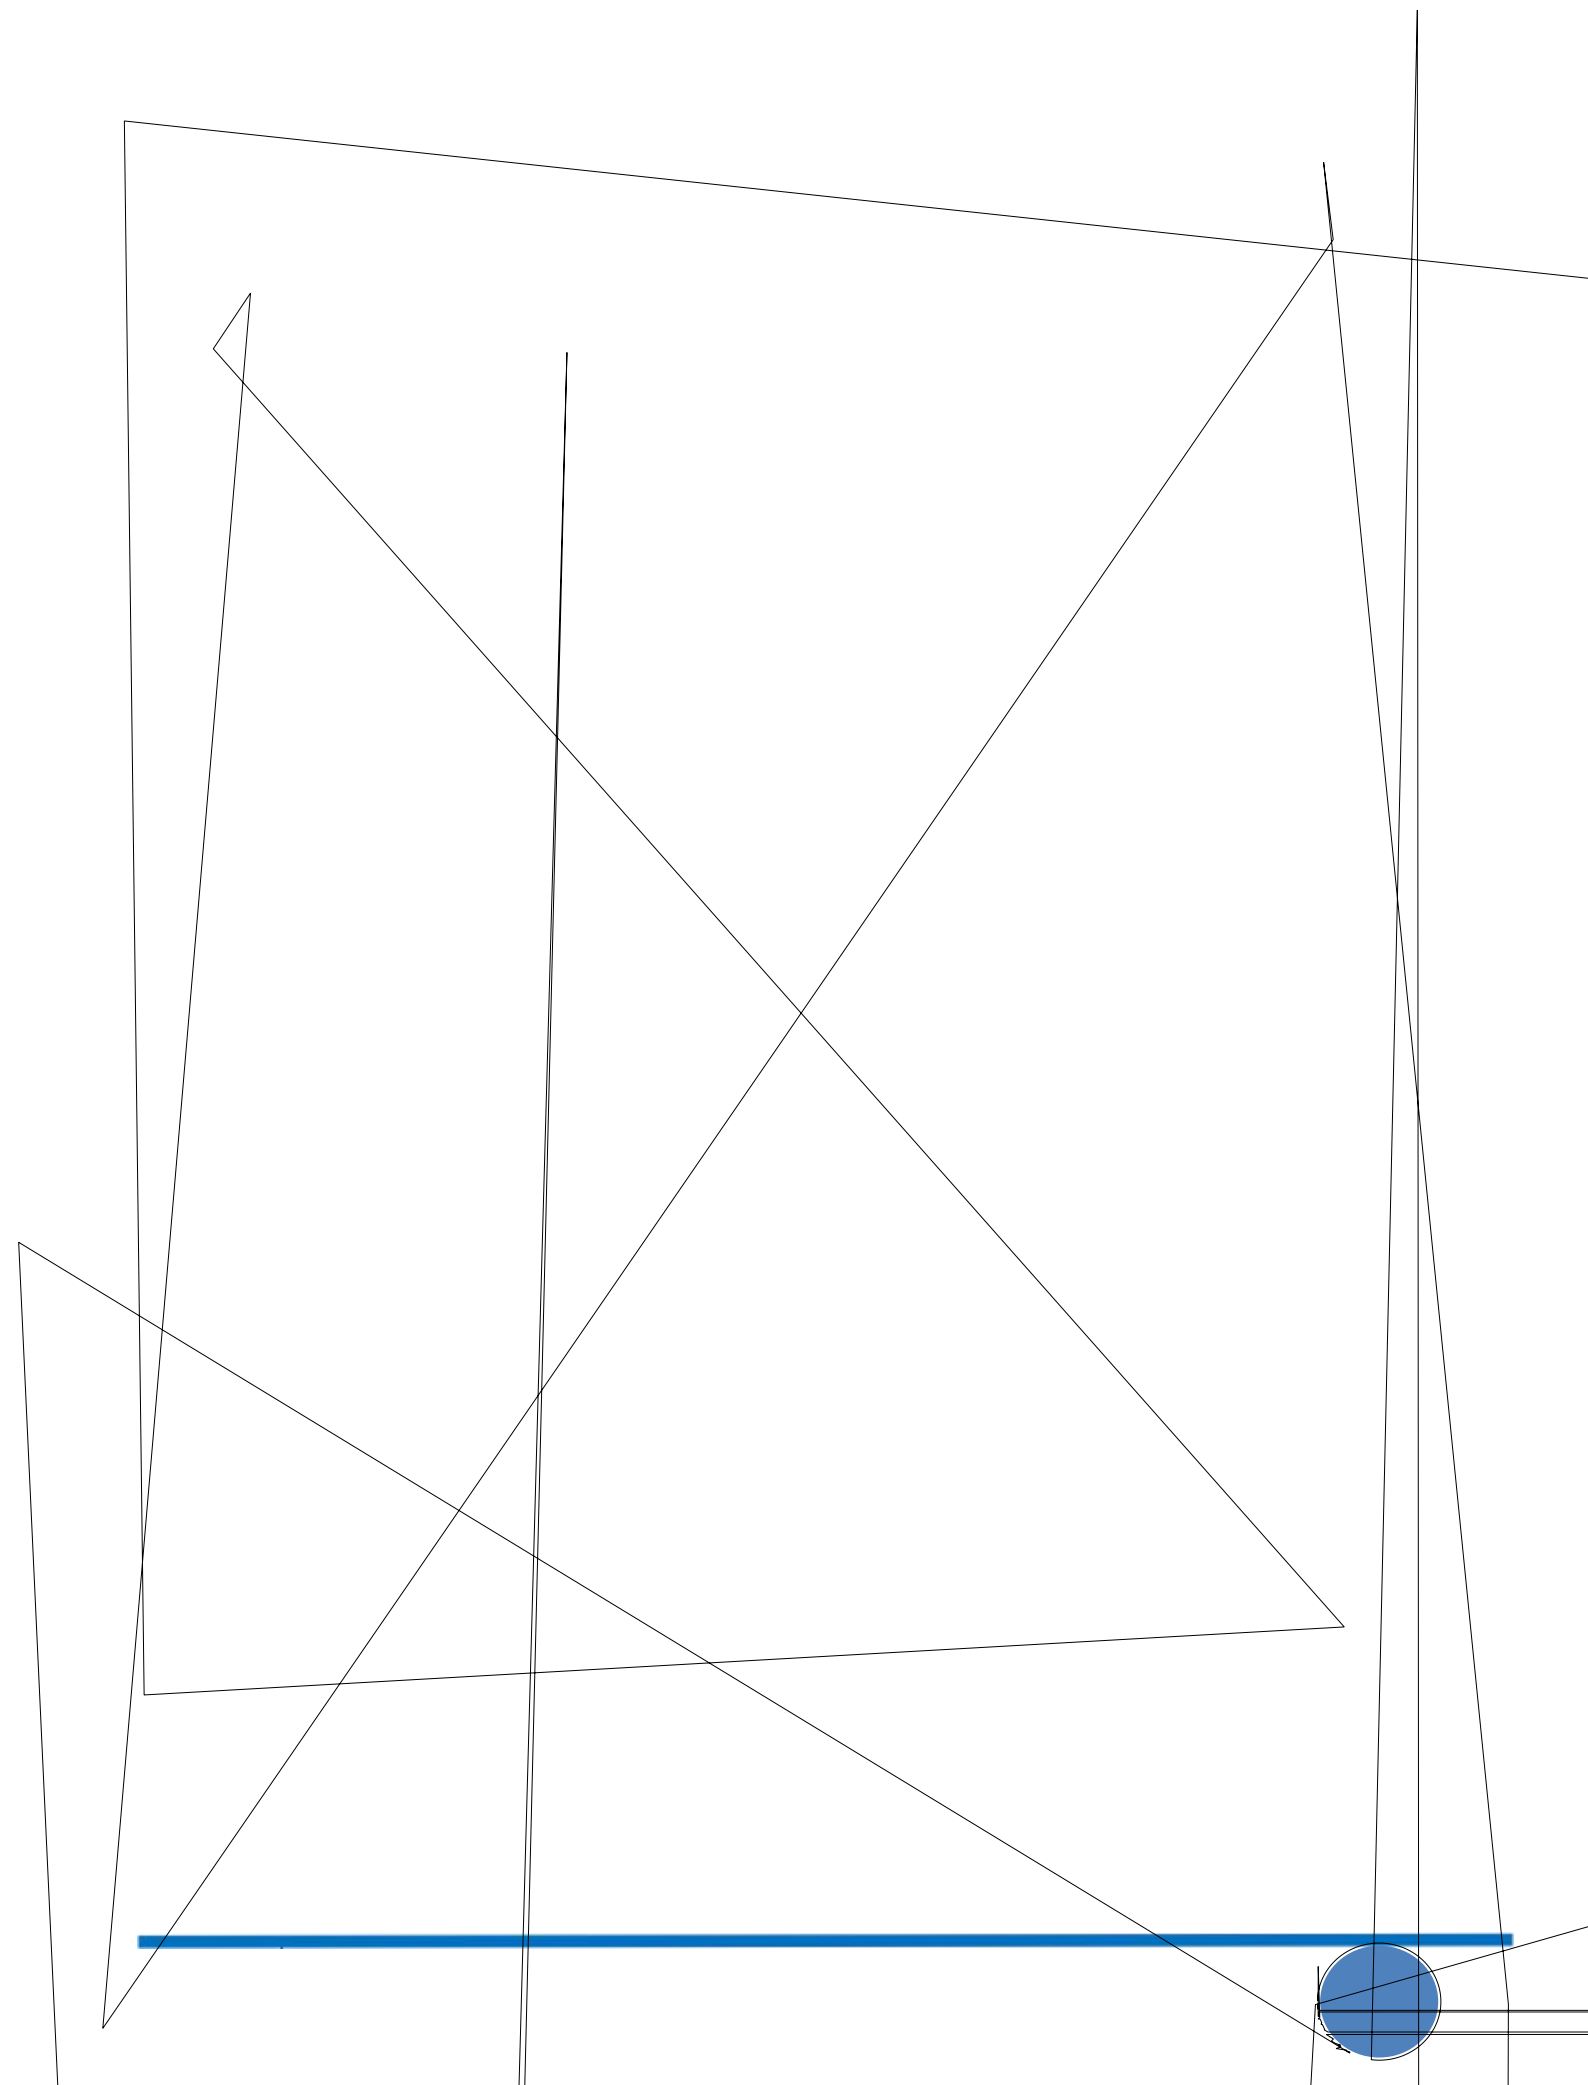

包装（1）

Packaging (1)

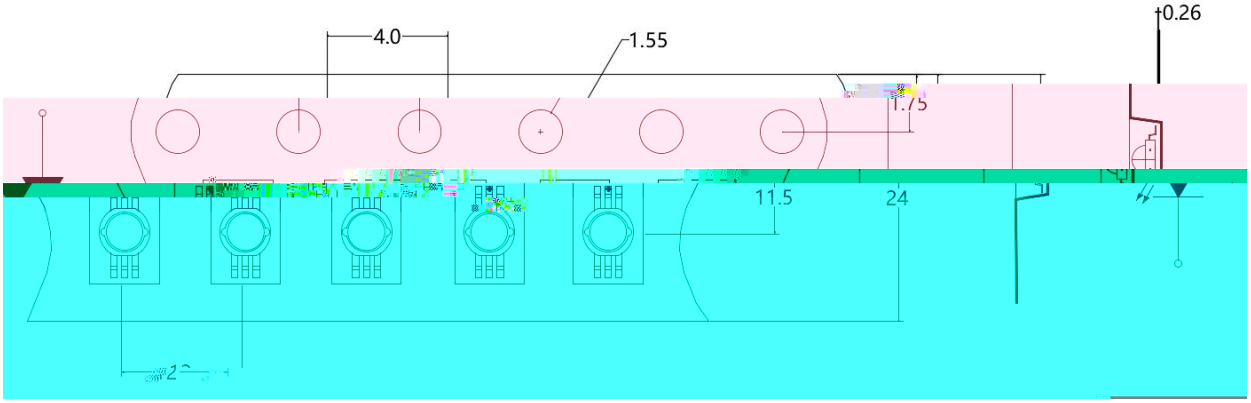

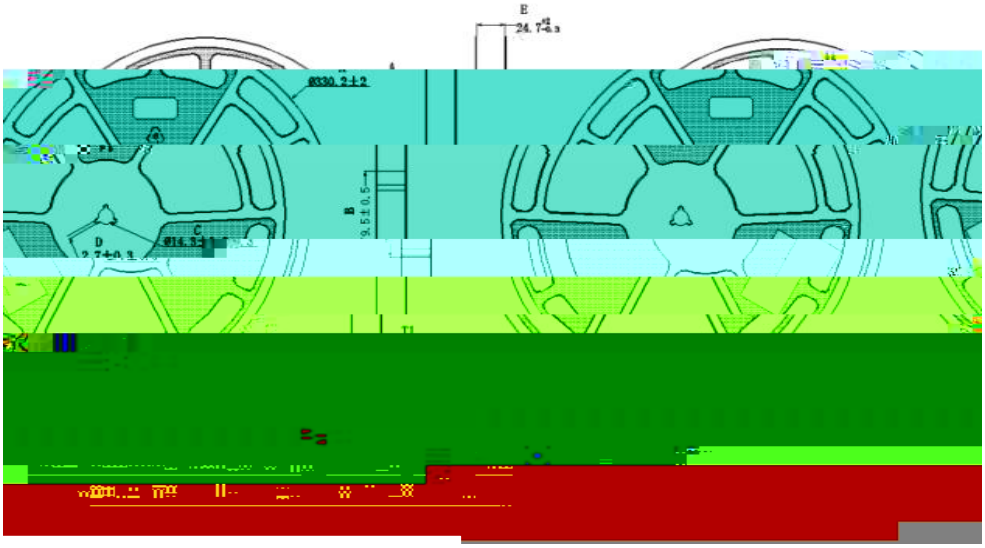

6LW

Q

圆盘及载带卷出方向及空穴规格 Disk and carrier belt direction of roll and hole dimensions

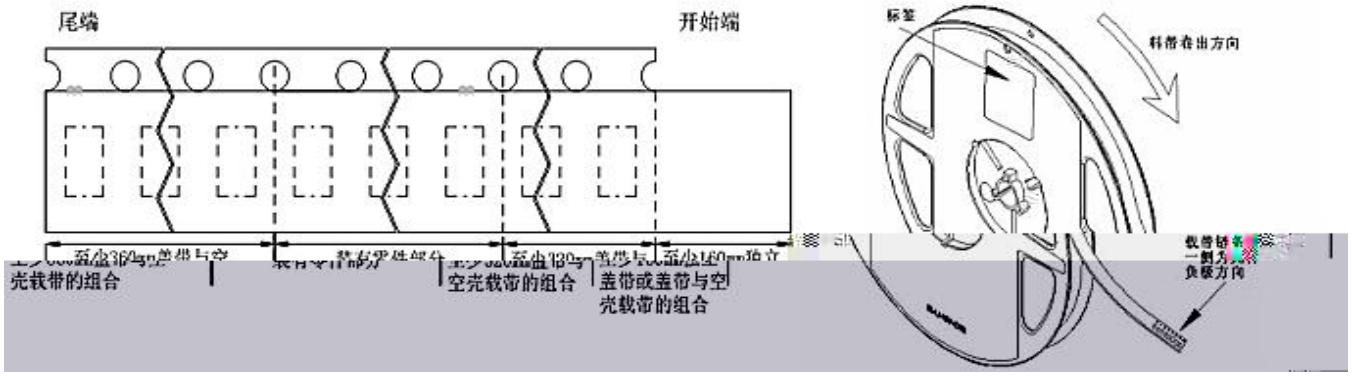

XINGLIGHT®

Part No. :XL-[redacted]

焊接指导（1）

Guideline for Solder

使用烙铁人手焊接

60

回流焊接（ ）

	120~150 120Sec Max 180 Max 10 Sec Max	120~200 120 Sec Max 220 Max 6 Sec Max		

焊接指导（2）

Guideline for Soldering (2)

清洗：

静电：

1.0 ₑ㏖ₘ ŋ ضج 106-109 ㏋