Part No. :XL-6028PCBW-WS2812B

[redacted]

电性参数

Ta=25 Absolute Maximum Rating(ta=25)

Supply Voltage	VDD	3.5-5.5	V
Logic inpn dltag	IJ	ɒ	

Ta=25 Optical-electrical parameter(ta=25)

Part No. :XL-6028PCBW-WS28

Date transmission mode

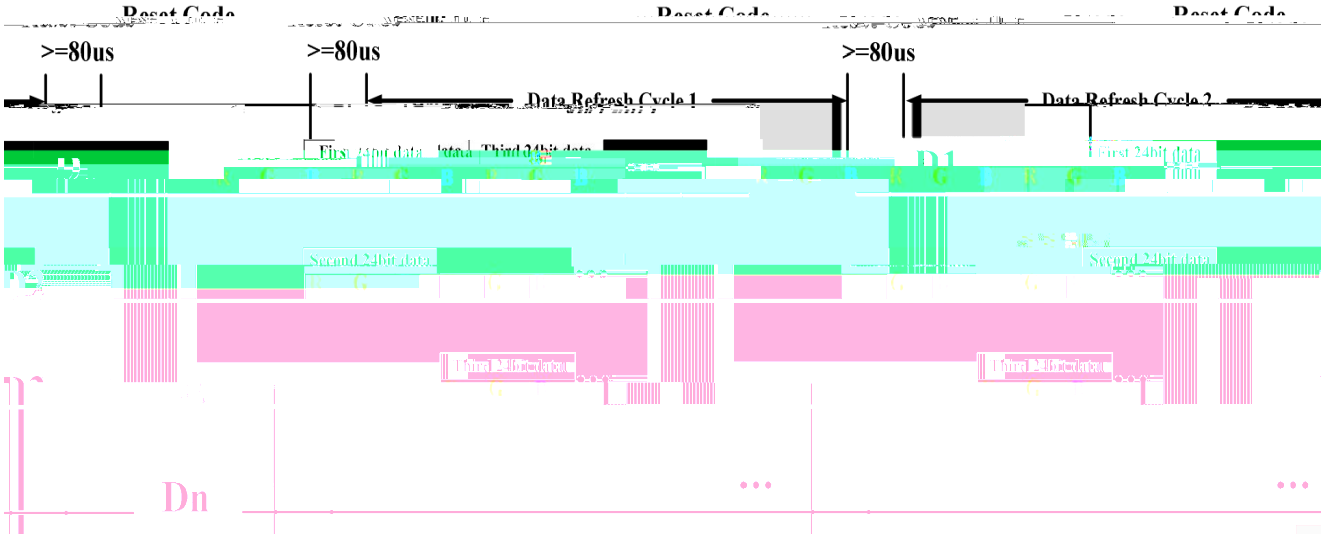

D1 MCU D2 D3 D4

Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit 24bit data structure



GRB

Note: high order first send, send data in the order of GrB

:Time sequence waveform:

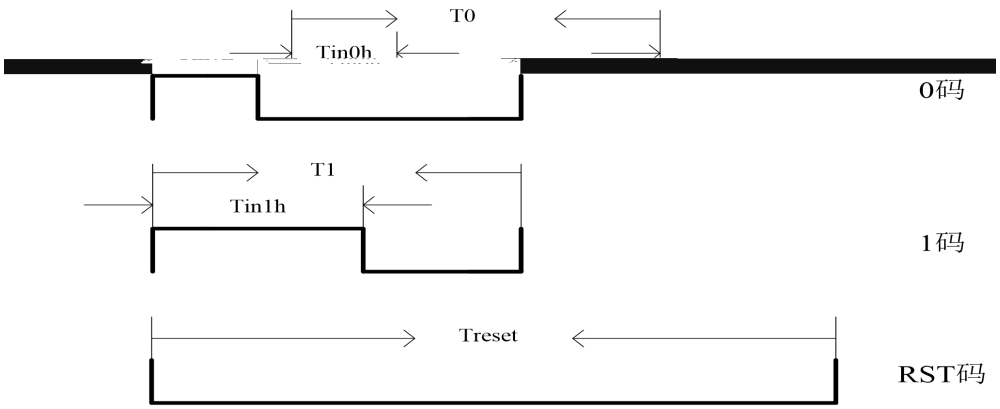

Part No. :XL-6028PGPW-WS28

XINGLIGHT®

Part No.:XL-6028PCBW-WS2812B

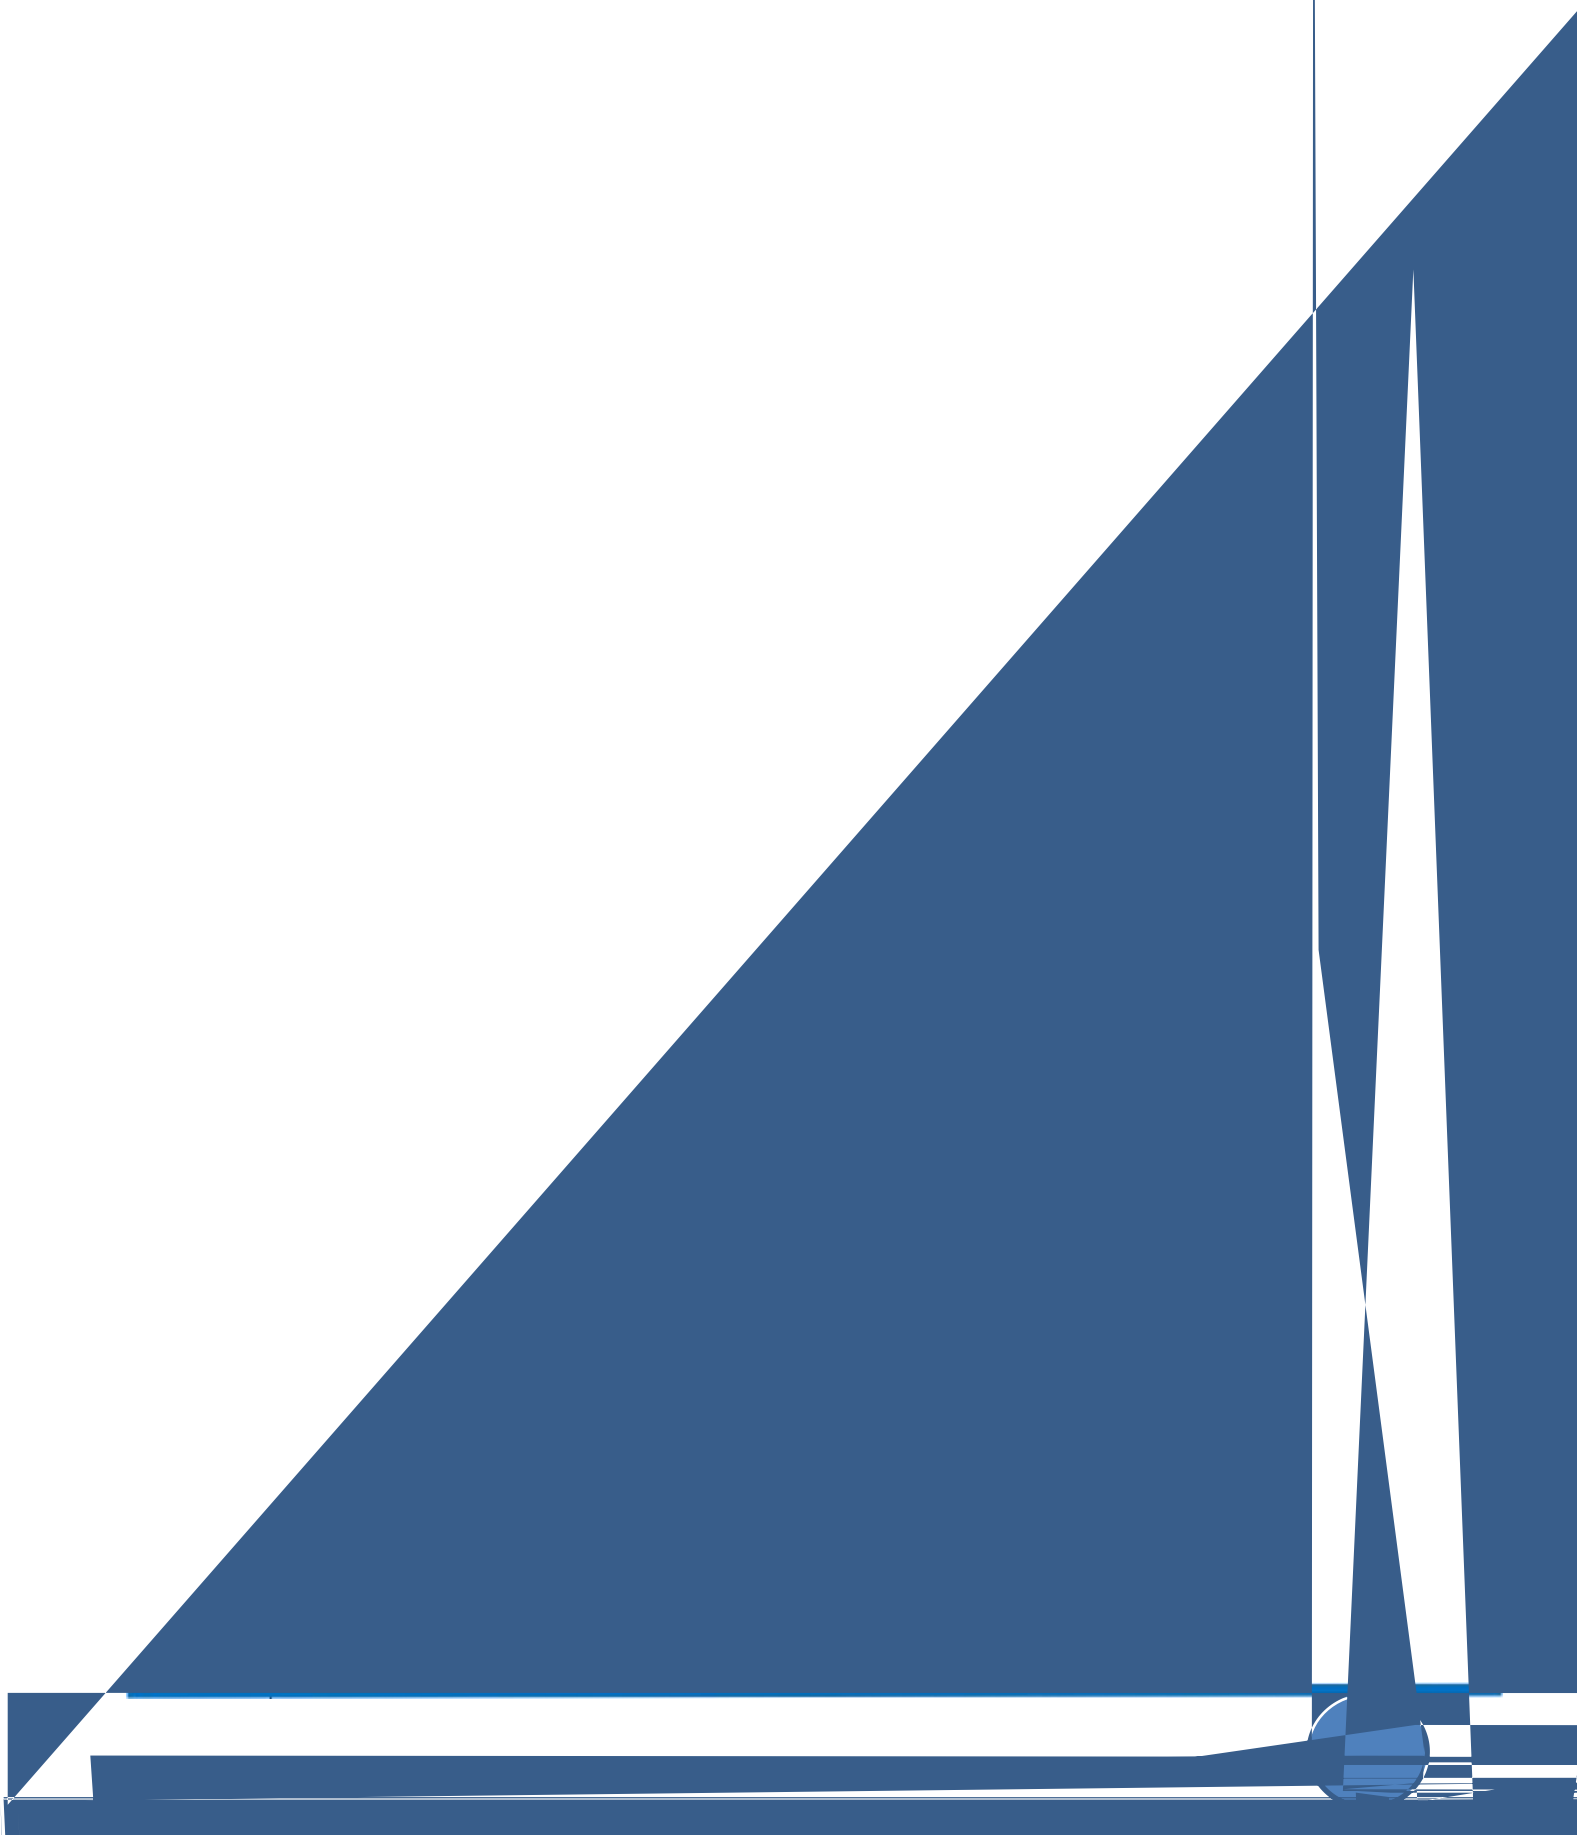

XINGLIGHT®