





Ta=25 Absolute Maximum Rating(ta=25)

Parameter	Symbol	Value	Unit
Pulse Forward Current	IFP(R)	200	mA
	IFP(IR)	200	
Forward Currentn	IF(R)	50	mA
	IF(IR)	50	
5%	(,		



可靠性试验

Reliability Test Items And Conditions


Test Items	Reference	Test Conditions	Time
------------	-----------	-----------------	------

Criteria For Judging Damage)



Packaging (2)

◆ 防潮抗静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

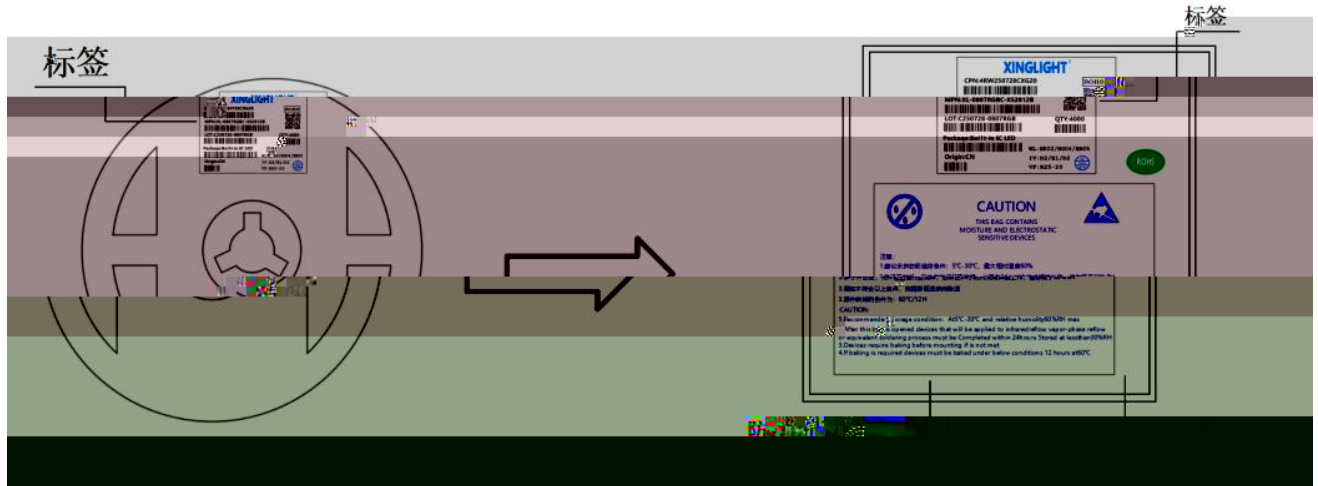

♻️ Cardboard Box



◇ 标签说明 Label Expansion





使用注意事项（2）

Precautions (2)

设计建议:



LED

È

