Part [redacted]

Part [redacted]

Date transmission mode

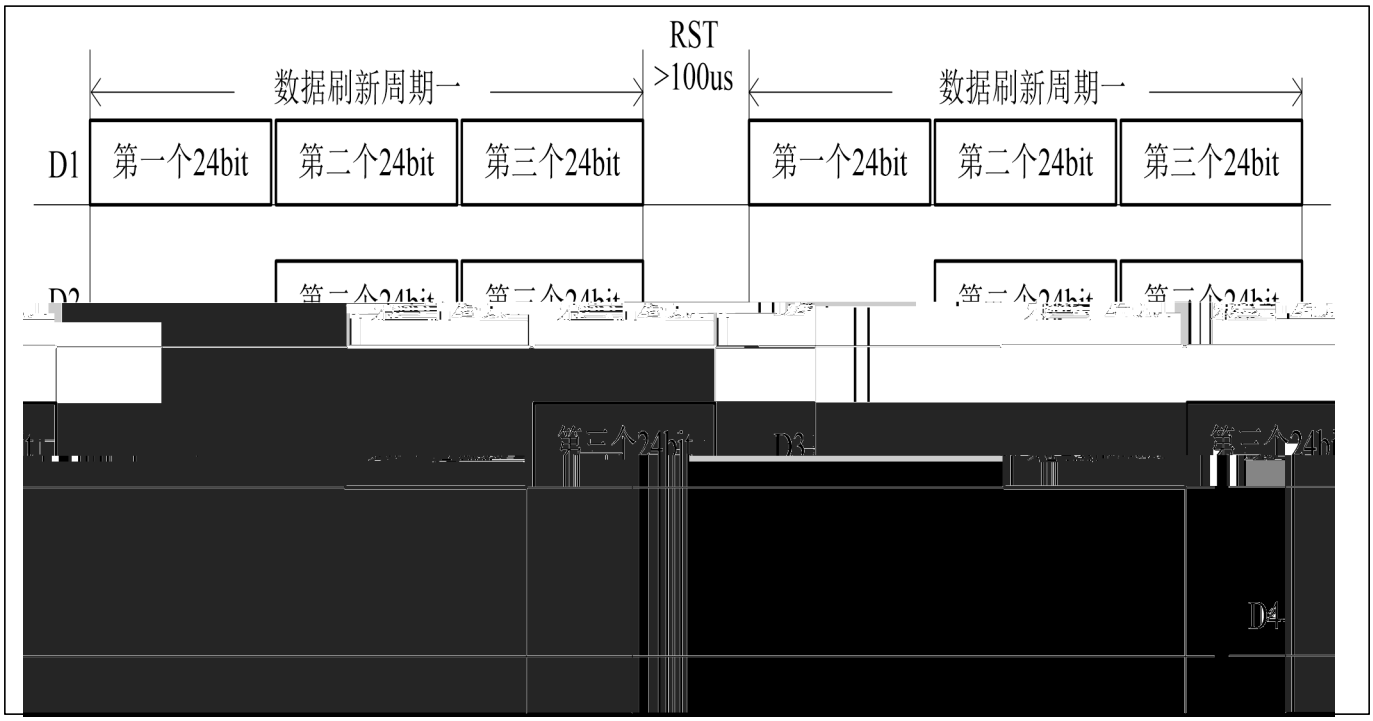

D1 MCU D2 D3 D4

Note: D1 refers to the data sent by MCU, and D2, D3 and D4 refer to the data automatically shaped and forwarded by cascade circuit

24bit 24bit data structure

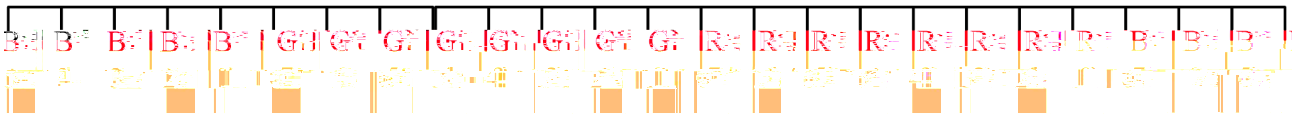

GRB

Note: high order first send, send data in the order of GrB

:Time sequence waveform:

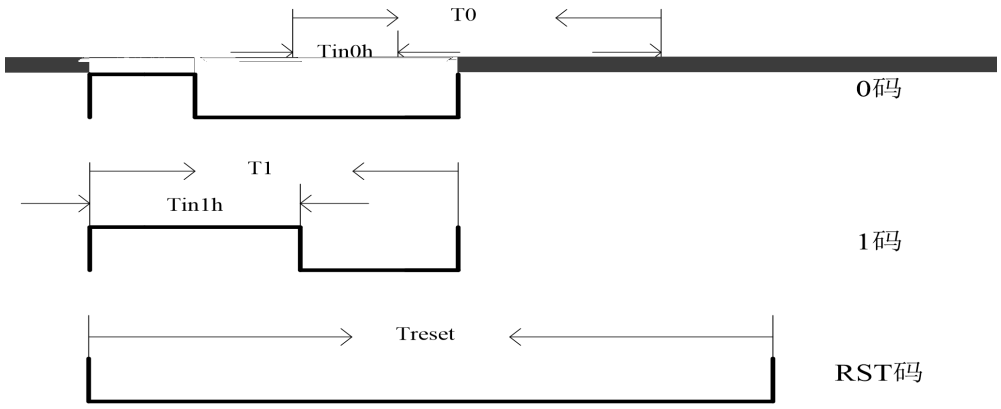

外形尺寸

Outline Dimension

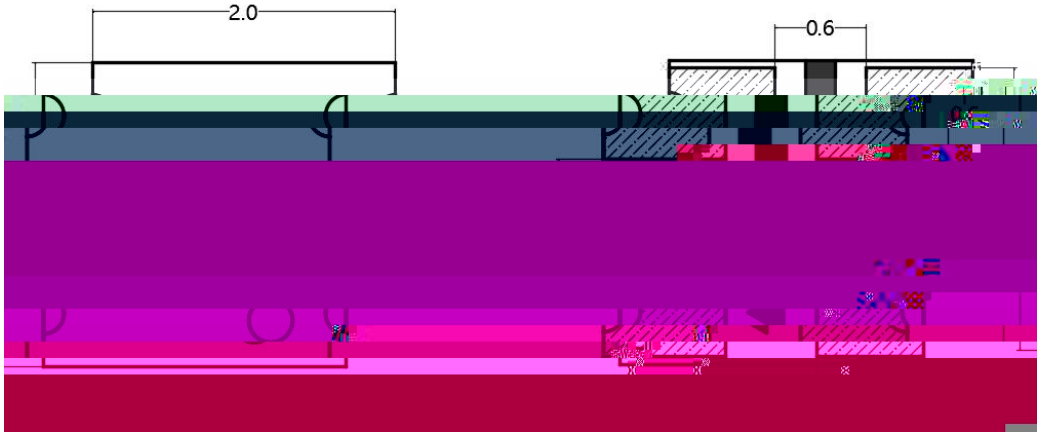

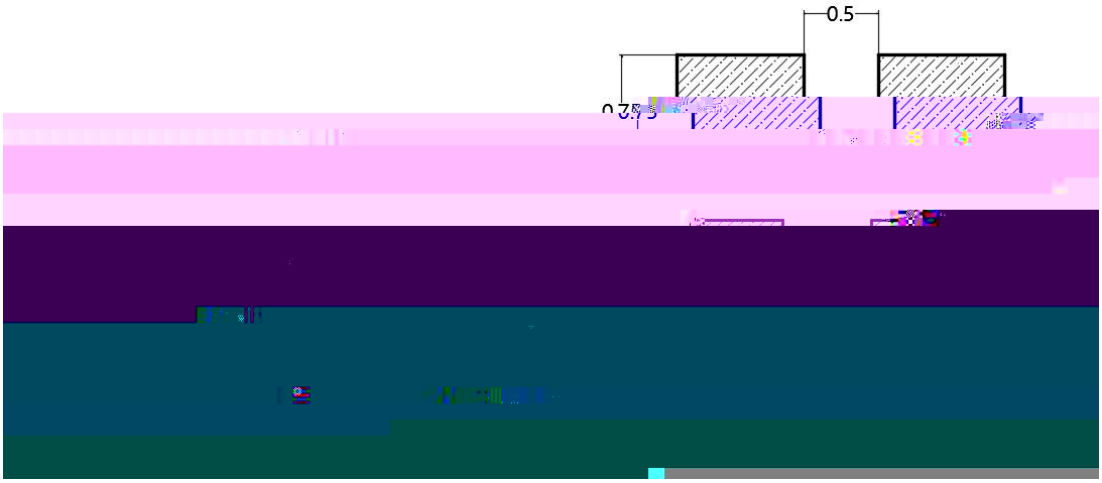

		IC RGB

包装（2）

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostic Foil Bag

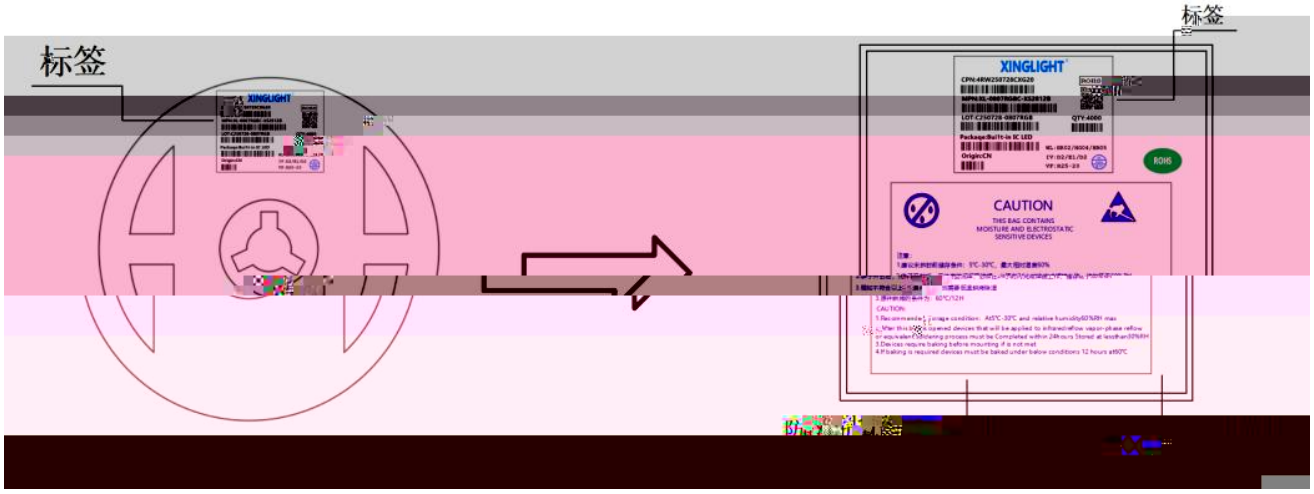

◇ 标签说明 Label Explanation

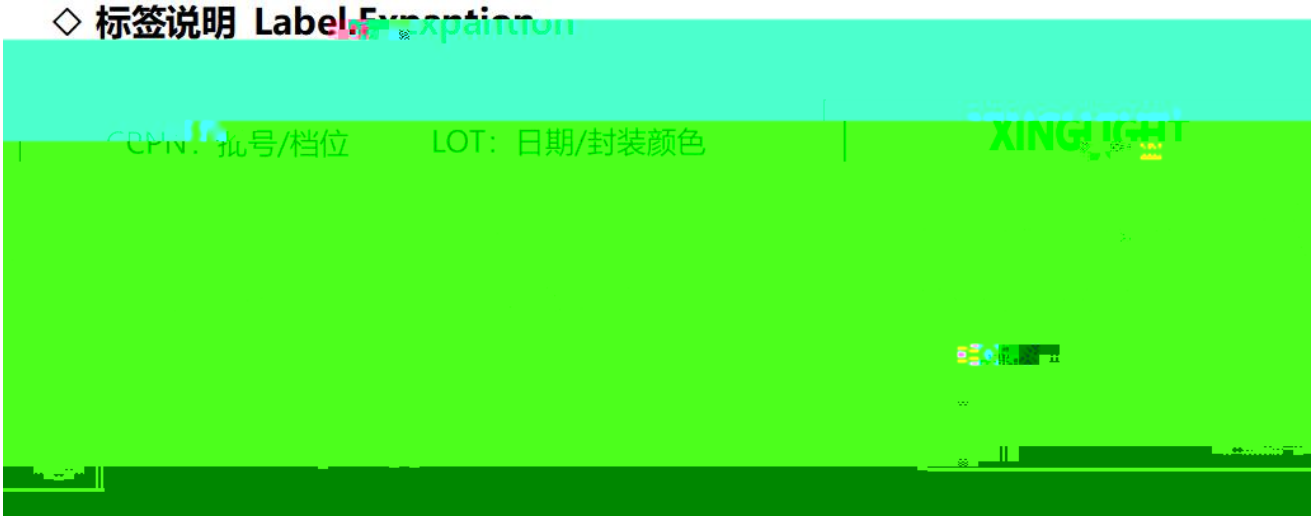

焊接指导（1）

Guideline for Solder[redacted]

使用烙铁人手焊接

30

使用注意事项（3）

Precautions (3)

其他事项：

[redacted]