






电性参数

Electrical Characteristics

Ta=25 Absolute Maximum Rating (Ta=25)

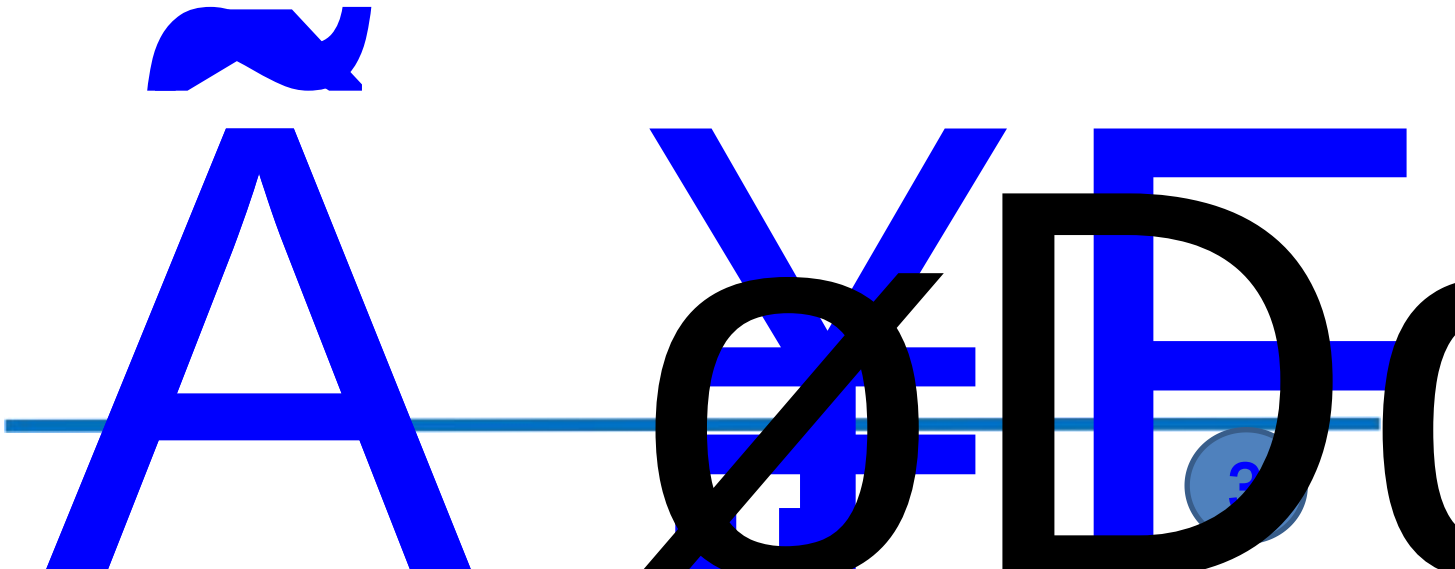








Failure criteria

standard	project	Test conditions	Failure criteria
1	(V _F) Forward voltage (VF)	I _F =20mA	U.S.L*1.1
	IV Light intensity (IV)	I _F =20mA	L.S.L*0.7
	(I _R) Reverse current (IR)	V _R =5V	U.S.L*2.0
2	Welding reliability	/	95% The proportion of solder paste covering pads is less than 95%

JB-A-E, B

Part No. VL 890661B123



réo 4.0 à



XINGLIGHT®

Part No. VI 290661313

© 2007 • pp. 1/2 • IX • SAE U • f5d

r

