



2014年10月10日



目录

电性参数

典型特性曲线

可靠性实验

外形尺寸


包装

焊接指南

使用注意事项





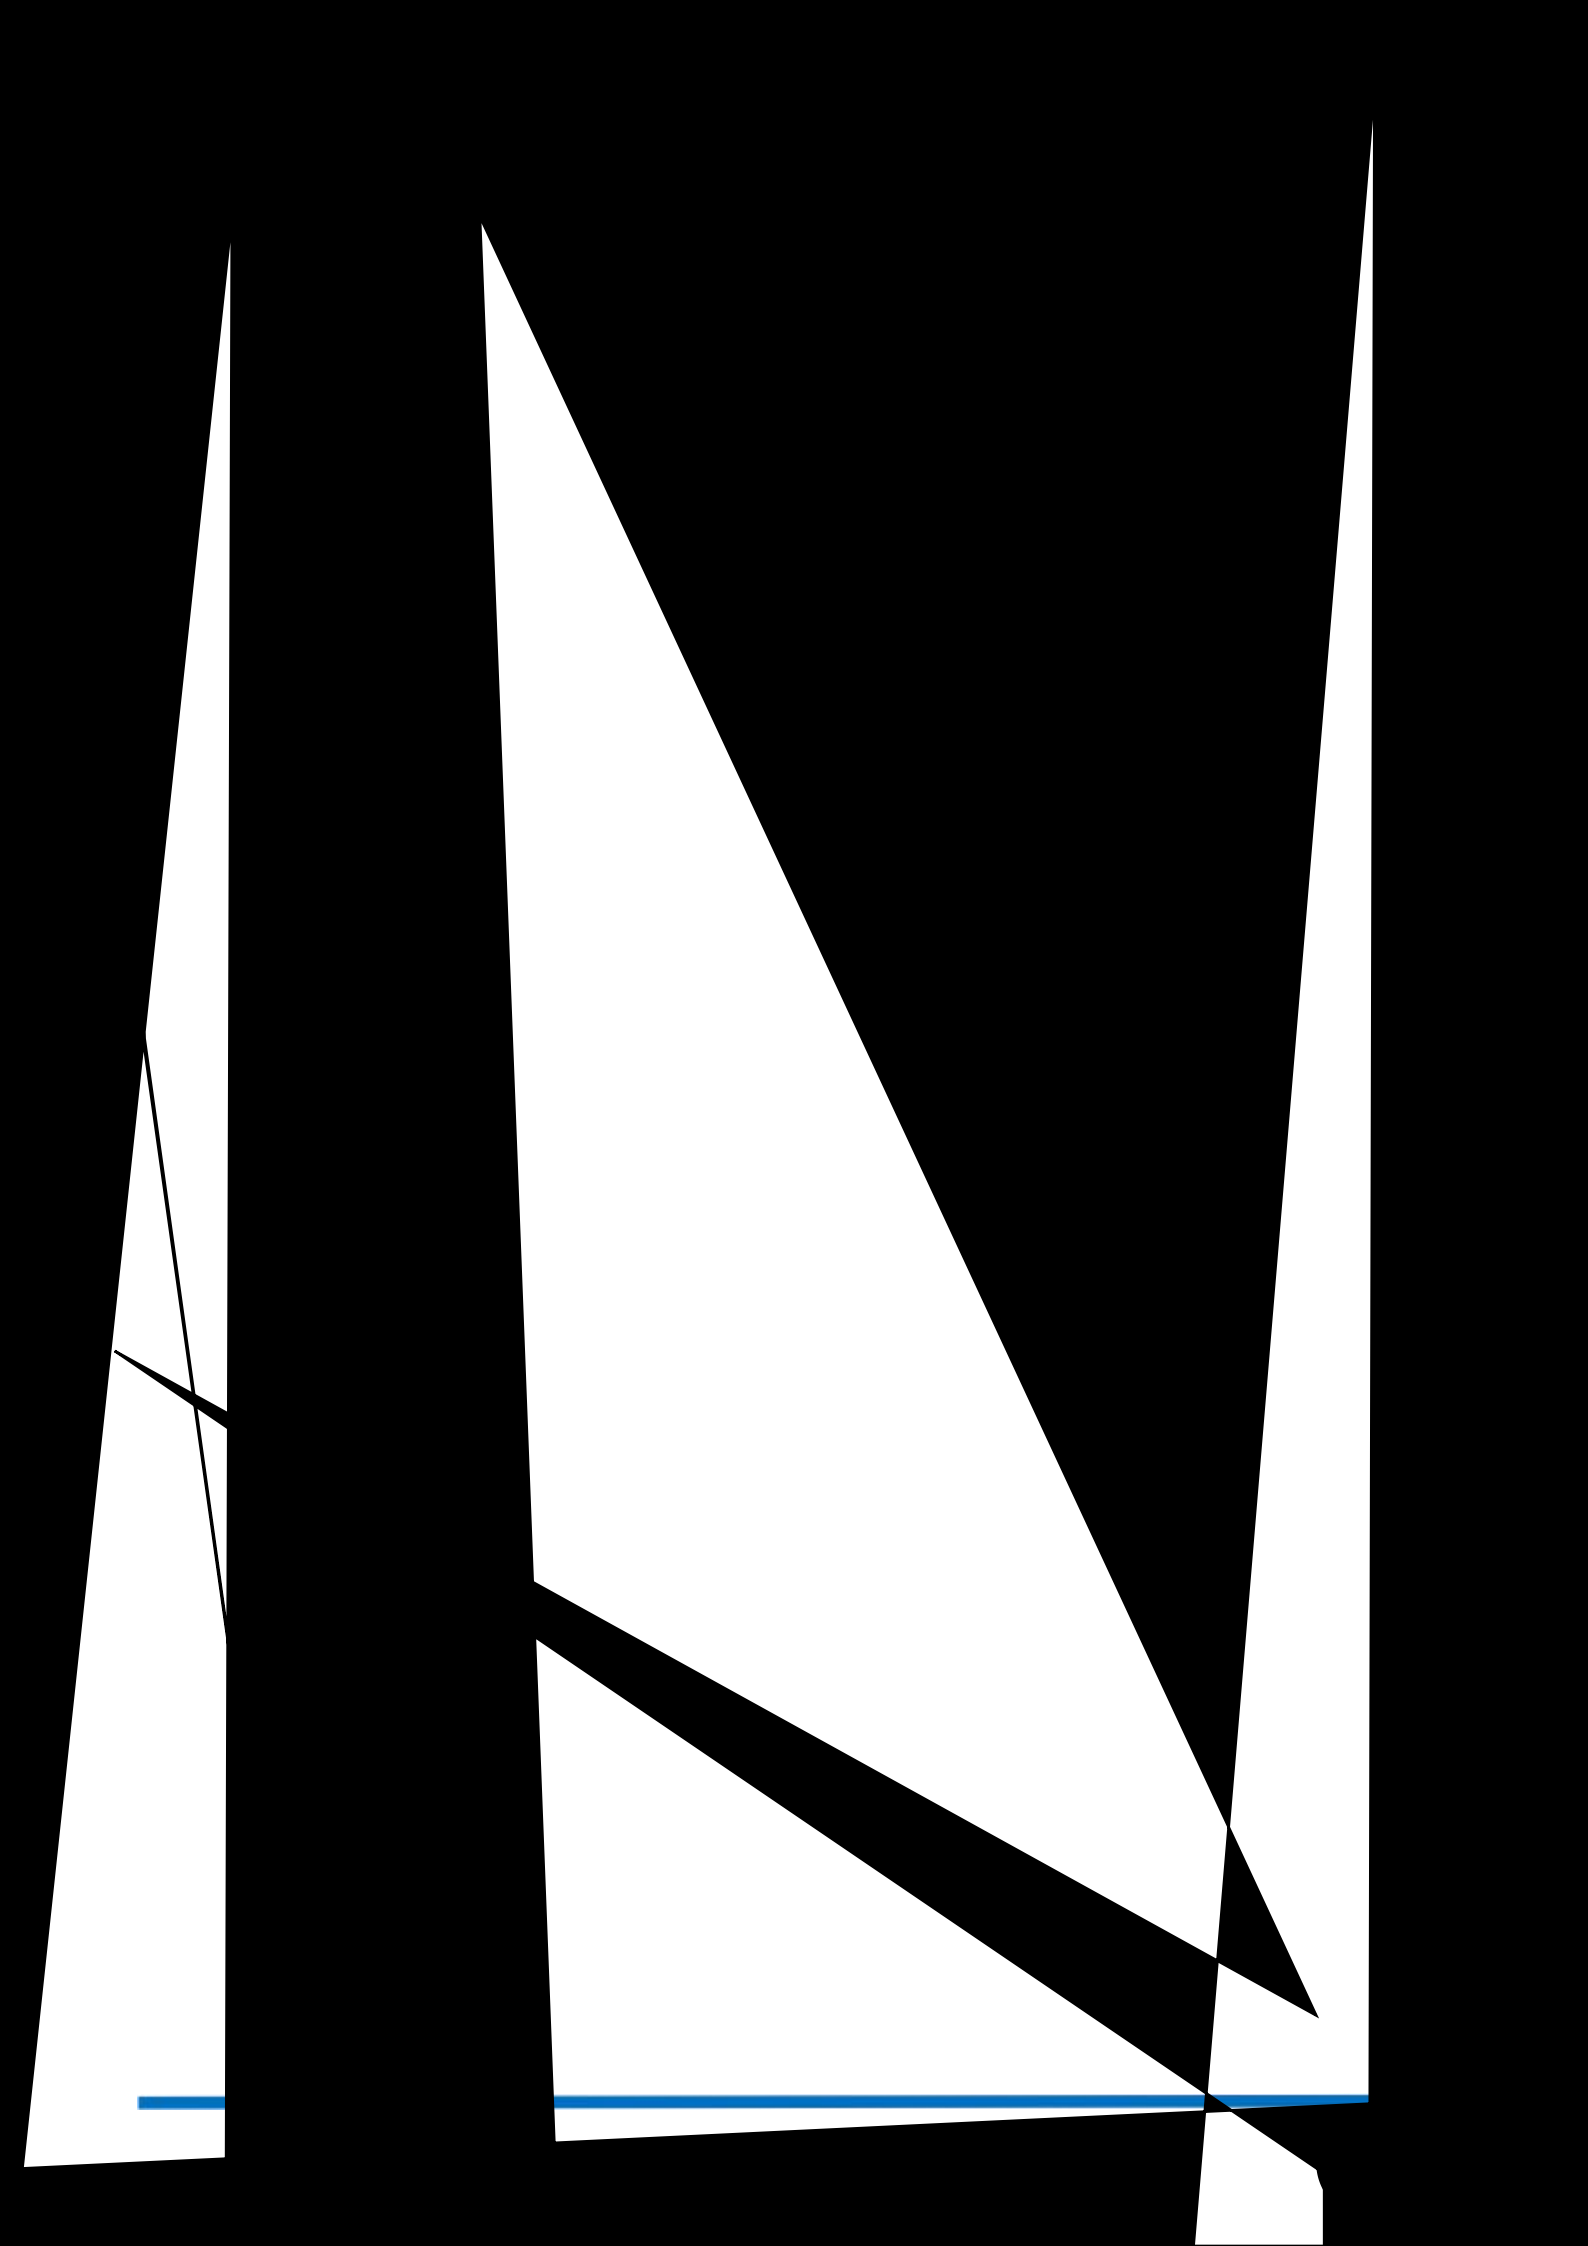







可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Reference standard
	Working life	20mA Continuous lighting at the maximum rated current at room	1000 -24 -24hours	MIL-STD-750D:1026
			1000 +72 +72hours	MIL-STD-883D:1005 JIS C 7021:B-1

High emperatv

Endurance test














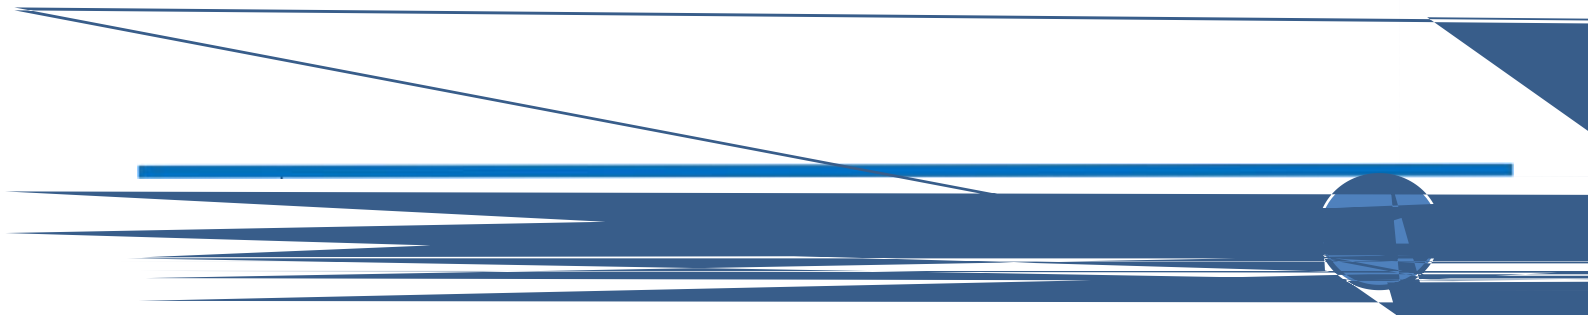



使用注意事项（3）

Precautions (3)

其他事项

When handling LEDs, avoid touching the chip with your fingers. This can contaminate its surface, but also affect the heat dissipation of the LED, which may result in catastrophic failure of the LED. In addition, avoid putting excessive stress on LEDs, especially on the chip.

