

技术数据表

6070 (1w) 发光二极管




特点 (C) :

- * Luminous color and colloid: High brightness white / Yellow colloid
- * Packaging glue 6070 bracket
- * Luminous Angle 140 degrees
- * Environmental protection products Complied With RoHS Directive
- * Moisture sensitivity level MSL : 3 levels
- * EIA
- EIA standard packaging
- * SMT
- Suitable for SMT automatic production
- * ≤ 220
- Suitable for reflow soldering process ≤ 220

应用领域 (P) :

- * Building lighting, wall washing, and projection lights
- * Urban lighting, sculpture lighting
- * stage lights; ,
- Billboard lighting
- * Exhibition, sports venues, shopping malls
- * mass transit
- * street lamps

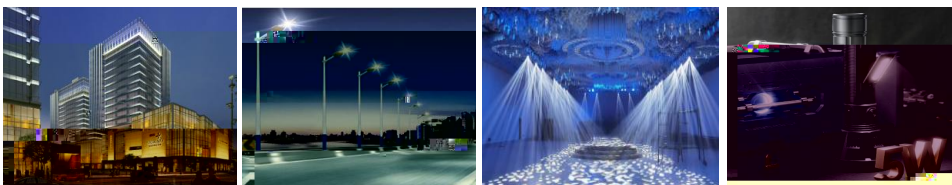

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项







典型特性曲线

Typical Characteristics Curves



可靠性试验

Reliability Test Items And Conditions




Continuous Operation Test

Low Temperature Storage Test

High Temperature Storage Test

Moisture-proof Test

Thermal Shock Test







焊接指导 (1)

Guideline for Soldering (1)

使用烙铁入手焊接

60W

300

3


LED

A soldering iron of less than 60W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering iron at 300°C or lower.



使用注意事项（2）

Precautions (2)

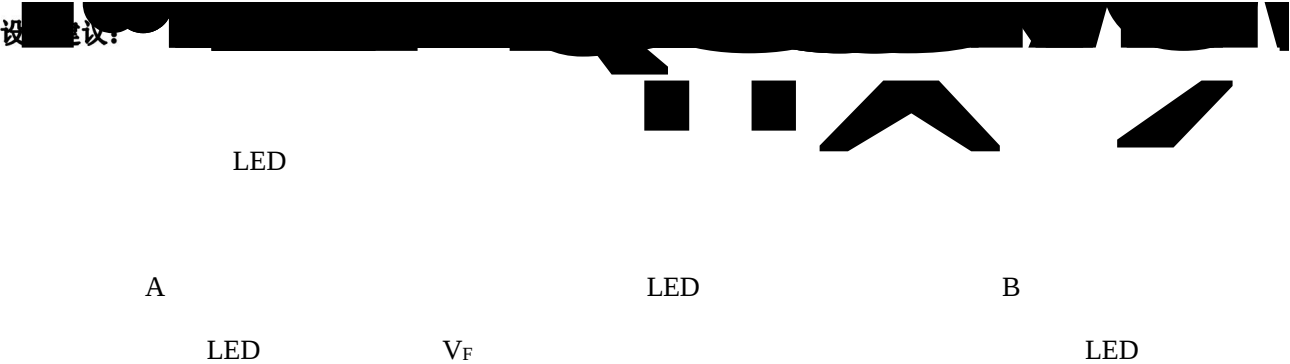

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for v T

0



