


技术数据表

特点（ ）：
* : F3/3.8*3.0*5.2*18mm
Appearance dimension: F3/3.8*3.0*5.2*18mm
* : /
Luminous color and colloid: yellow green brightness White




目录

Catalogue

ails

.




电性参数

Max Continuous Forward Current	IF		

Luminous Intensity	Iv	50	/	300	mcd	IF=20mA
Dominant Wave Length	λ d	562	570	575	nm	IF=20mA
Peak Wave Length	λ p	/	570	/	nm	IF=20mA
Forward Voltage	VF	1.8	2.2	2.6	V	IF=20mA
Viewing Angle	2θ1/2	/	30	/	deg	IF=20mA
Spectral Width at half height	λ	/	20	/	nm	IF=20mA
Reverse Current	IR	/	/	≤ 10	μ A	VR=5V

± 10%± 0.1V (X,Y)± 0.01± 1nm

Note: the light intensity error is 10%; The pressure drop error is ±0.1V ; (X,Y) coordinate deviation ±0.01 wavelength error ±1 nm.



亮度分档

:

代码	最小值	最大值	单位	测试条件

电压分档


:

代码	最小值
----	-----





波长分档



ΔH



典型特性曲线

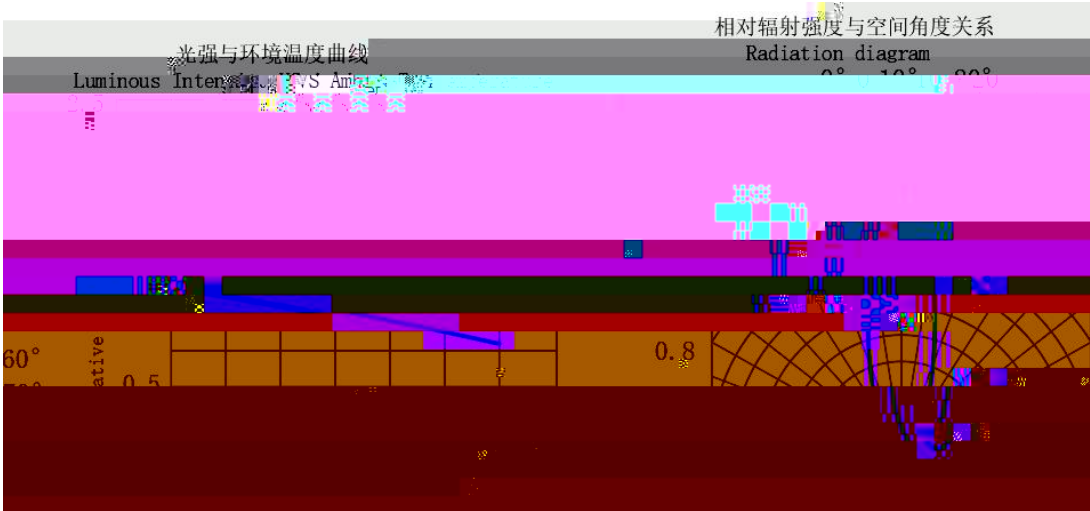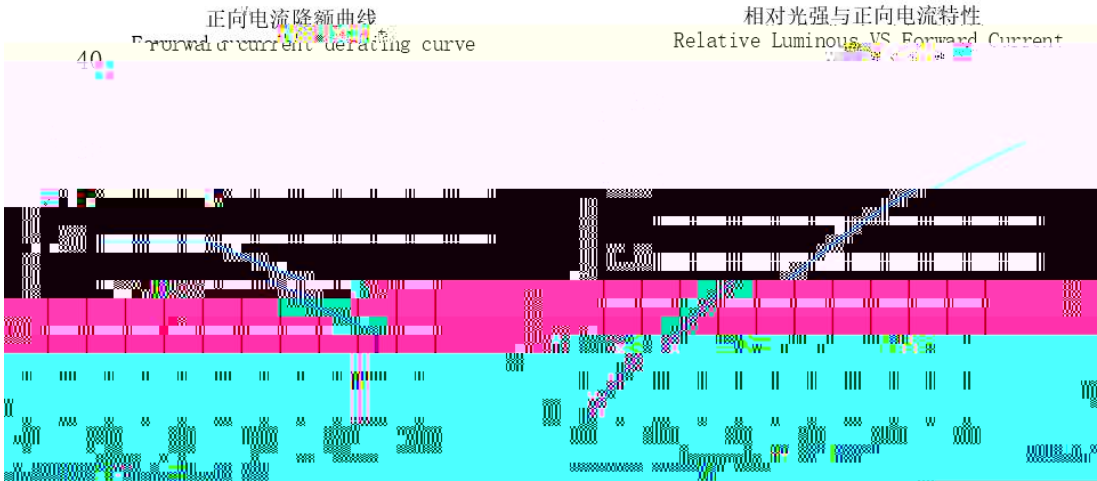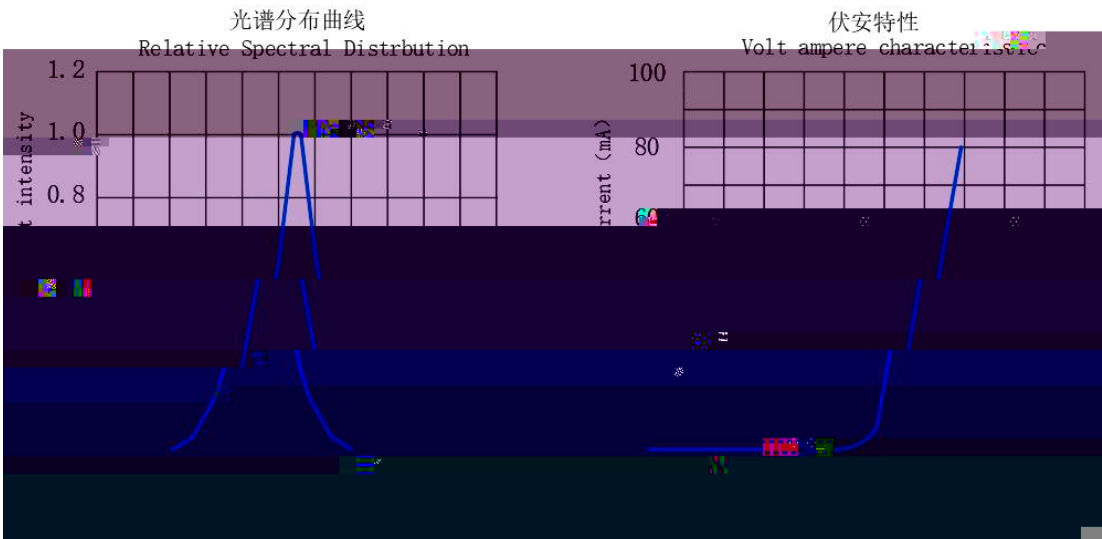


可靠性试验

Reliability Test Items And Conditions


--	--	--

Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
--------------	---------------------	---------	--------	-----

Endurance
test




外形尺寸

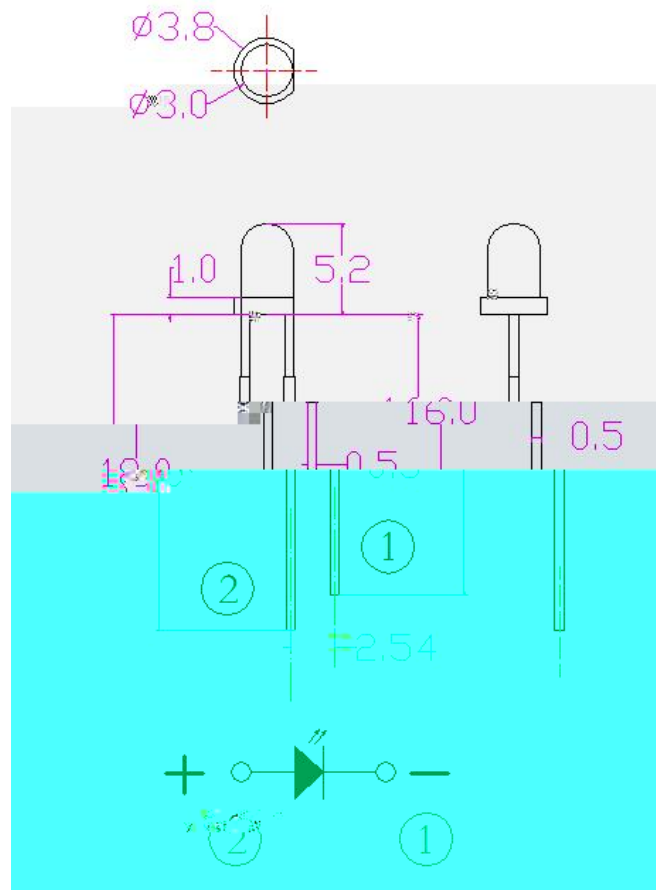


1.

2.

mm .



包装





使用注意事項 ()

LED


LED 30 70% LED

3

LED

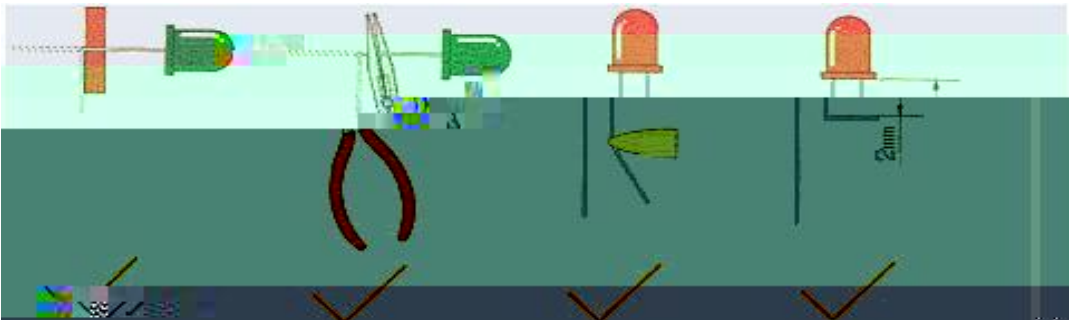

使用注意事項 ()




使用注意事项 ()

8、其他事项:

*

*



*

*

9、眼睛保护忠告:

*

*