


自性参数

Max Continuous Forward Current	IF		



Lum









亮度分档

:

电压分档




典型特性曲线

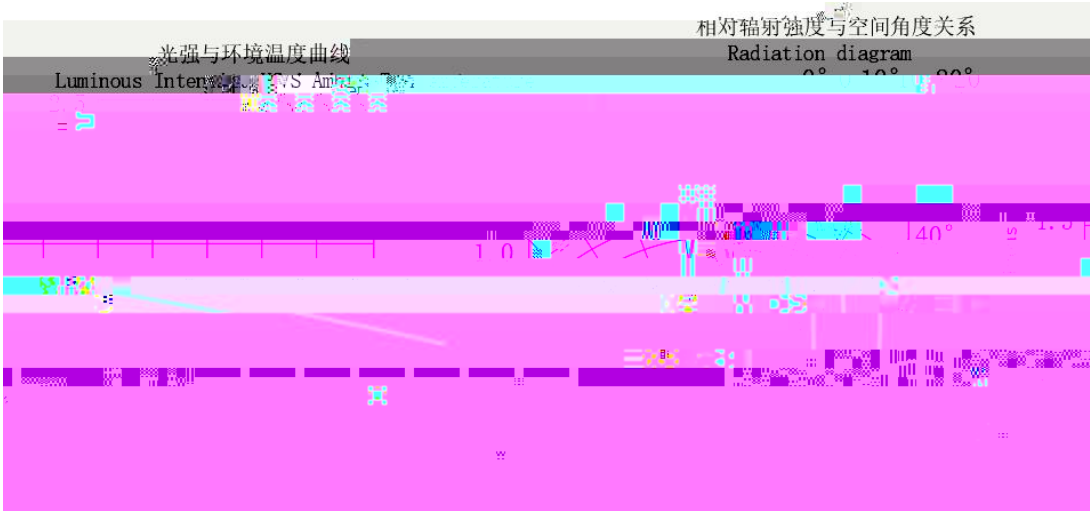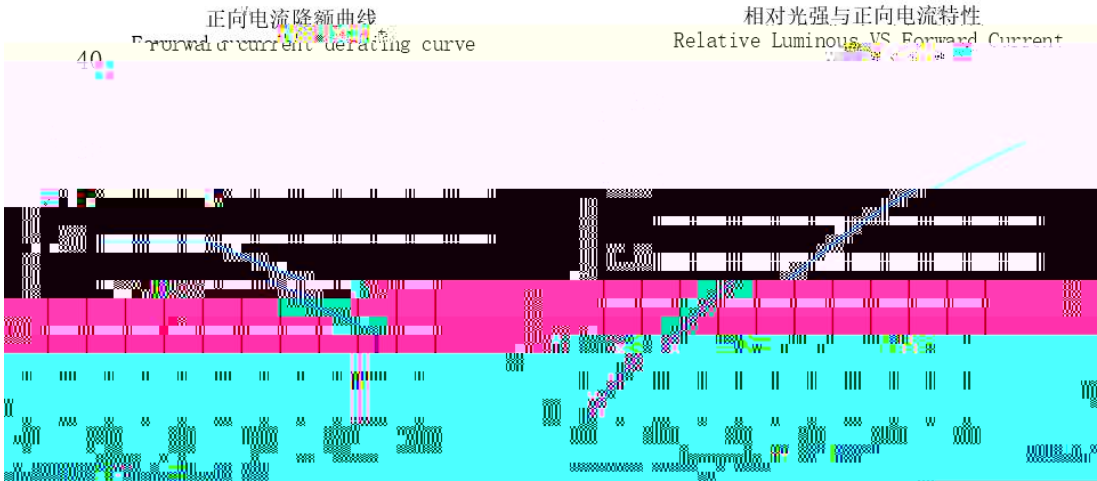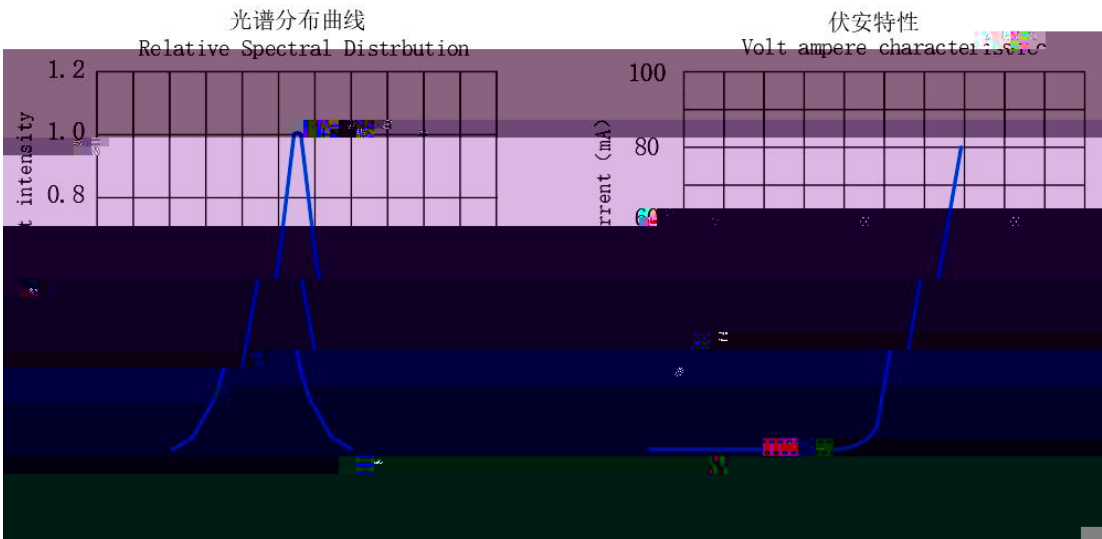

可靠性试验


Reliability Test Items And Conditions

Endurance test	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ± 5 -40 ± 5 30mins 5mins 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ± 5 -45 ± 5 5mins 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0 ° ~ 90 ° ~ 0 °	3times	22 PCS	0/1





Part No. :XL-

包装

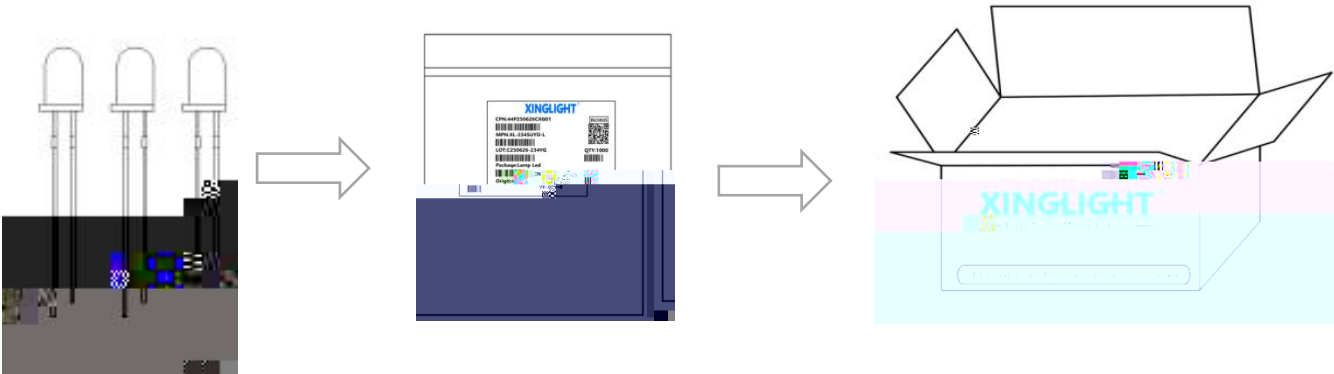

标签说明 Label Expantion

- CPN：批号/档位
- LOT：日期/封装颜色
- MPN：型号
- VF：电压代码
- WL：波长代码
- IV：亮度代码
- ORIGIN：产地
- QTY：数量
- PACKAQE：封装

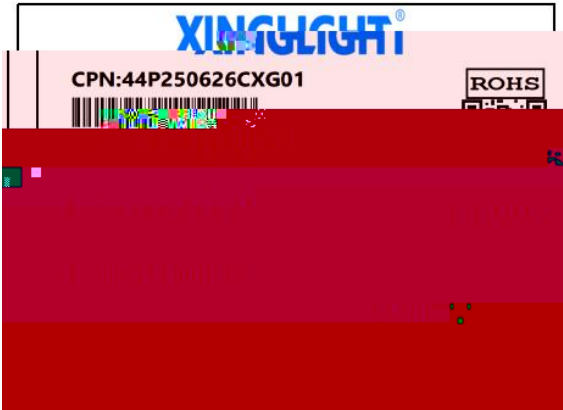



使用注意事項 ()

LED

LED 30 70% LED

3

LED

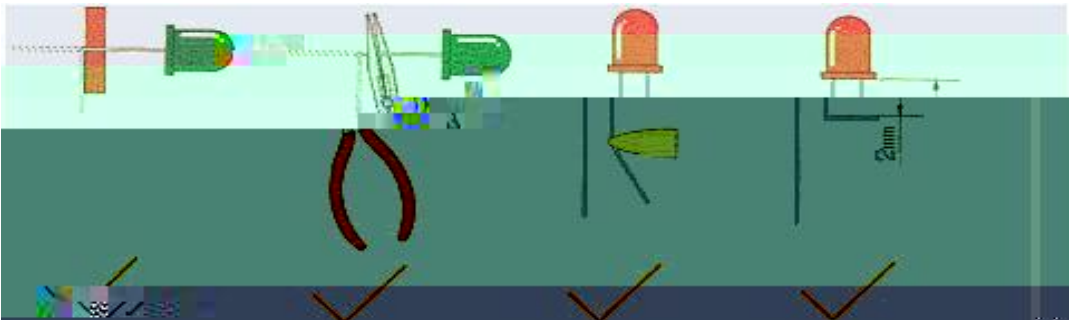

使用注意事項

LED

LED

LED

LED

