


XL-DZ304SURSYGW/3

技术数据表 Technical Data Sheet

F3MM 白半红蓝绿四色单灯三孔灯座

特点 (characteristic) :



目录

Contents


Electrical Characteristics.....3

Typical Characteristic Curves.....6

Outline Dimensions.....9

Packaging..... 10

Precautions.....11




自性参数

Electrical Characteristics



Absolute Maximum Ratings Ta=25

Parameter	Symbol	Value		Unit



Initial Electrical Optical Characteristics Ta=25

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Test Conditions
-----------	--------	------	------	------	-------	-----------------




亮度分档:
Brightness grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions





电压分档:
Voltage grading:

波长分档:
Wavelength grading:




典型特性曲线

Typical Characteristics Curves

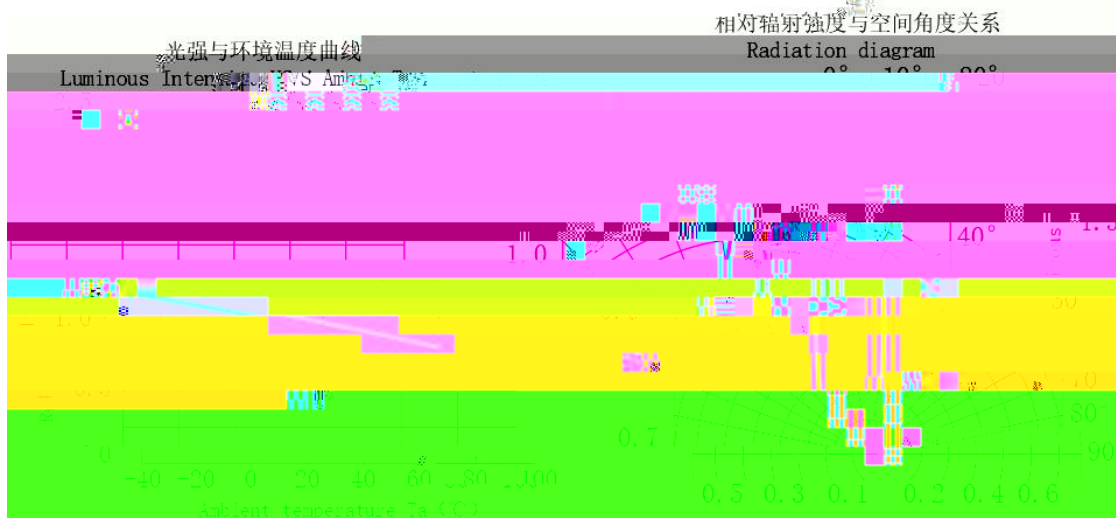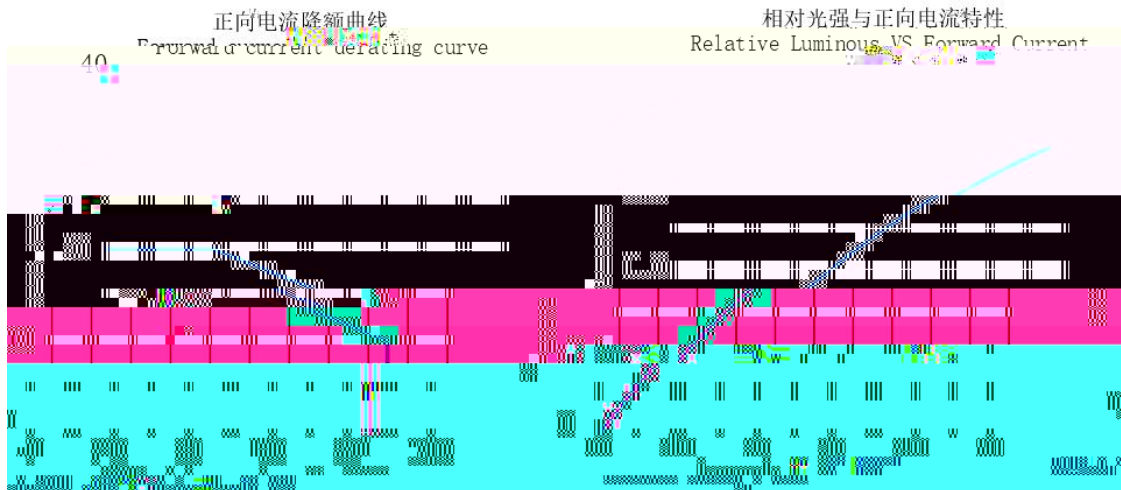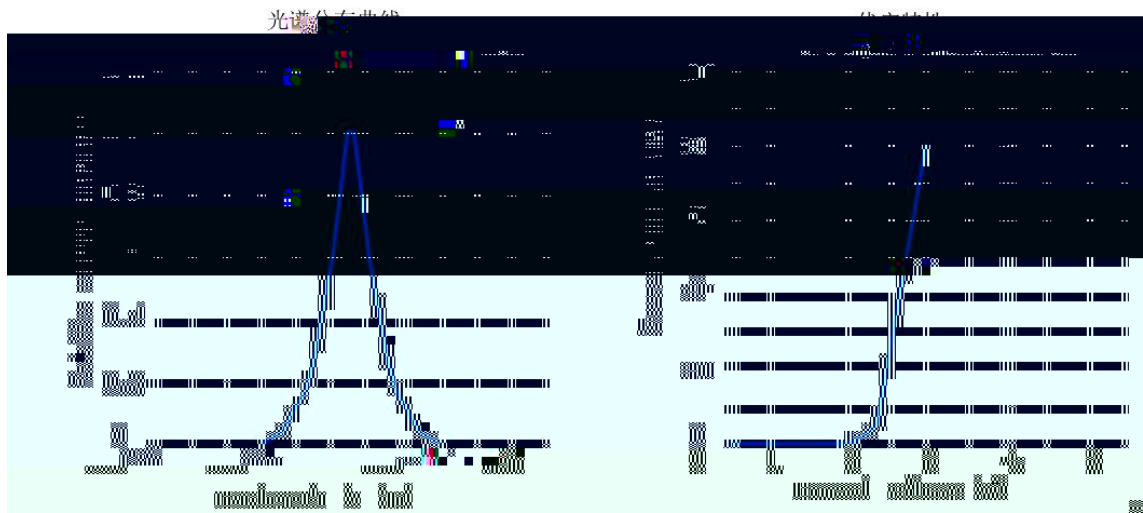




:



可靠性试验



Reliability Test Items And Conditions

--	--




外形尺寸

Outline Dimension

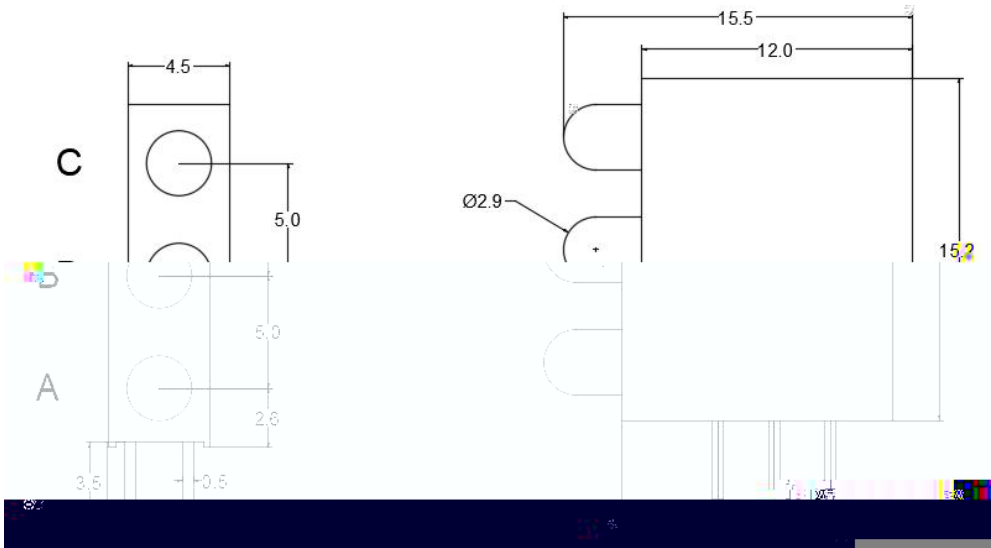

包装

Packaging

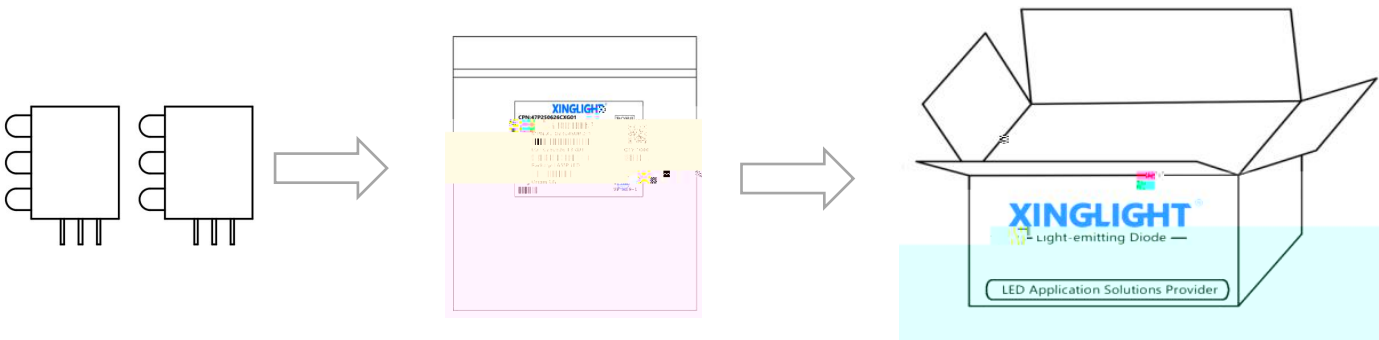

标签说明 Label Expantion

CPN: 批号/档位	LOT: 日期/封装颜色
MPN: 型号	VF: 电压代码
WL: 波长代码	IV: 亮度代码
ORIGIN: 产地	QTY: 数量
PACKAQE: 封装	



使用注意事項 ()


Precautions (1)

1、貯蔵:

Storage

2、静电:

Static Electricity



使用注意事項 ()

設計建議

Design Consideration

H

)

G

Q

D


VH

PH

,FZ

R

W



使用注意事項 ()

4、其他事項:

Others