

XL-B324SURUBC F3



特点（ ）：

* L/W/H L

Part No. : XL-

Part No. : XL-

亮度分档

:

代码	最小值	最大值	单位	测试条件
A5	400	500	mcd	IF=20mA
A6	500	700		
A9	1200	1500		
B1	1500	1800		
B2	1800	2100		




电压分档

:

代码	最小值	最大值	单位	测试条件
N12-7	1.8	2.0	V	IF=20mA
N12-8	2.0	2.2		
N12-9	2.2	2.4		
N13-3	2.8	3.0		
N13-4	3.0	3.2		
N13-5	3.2	3.4		

波长分档

:

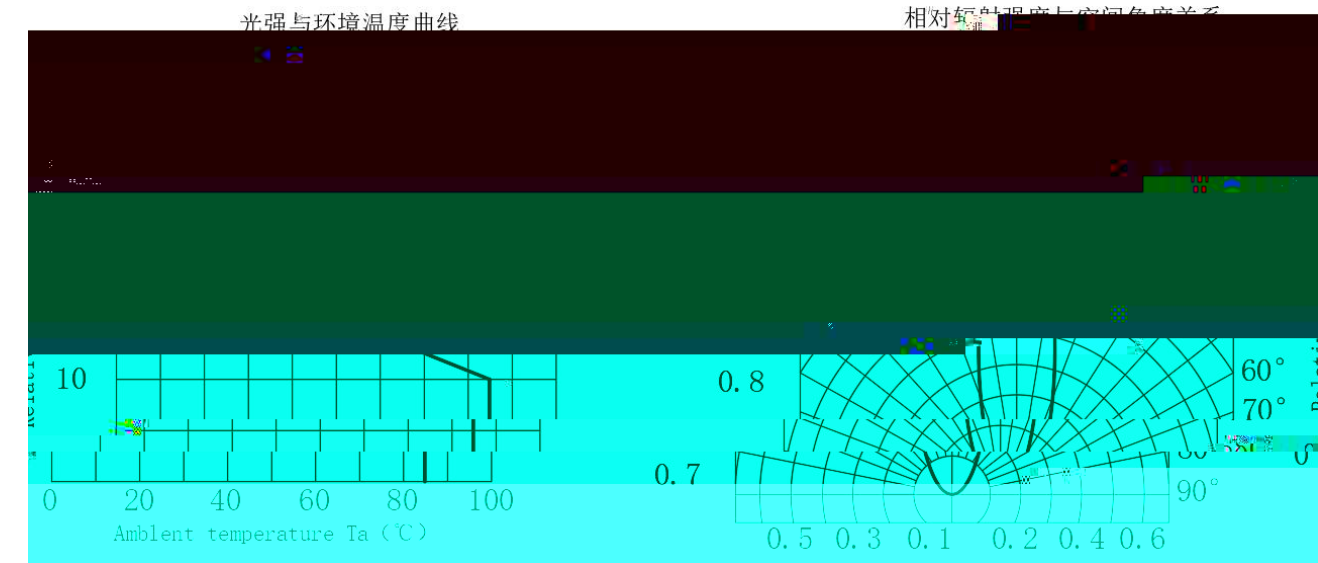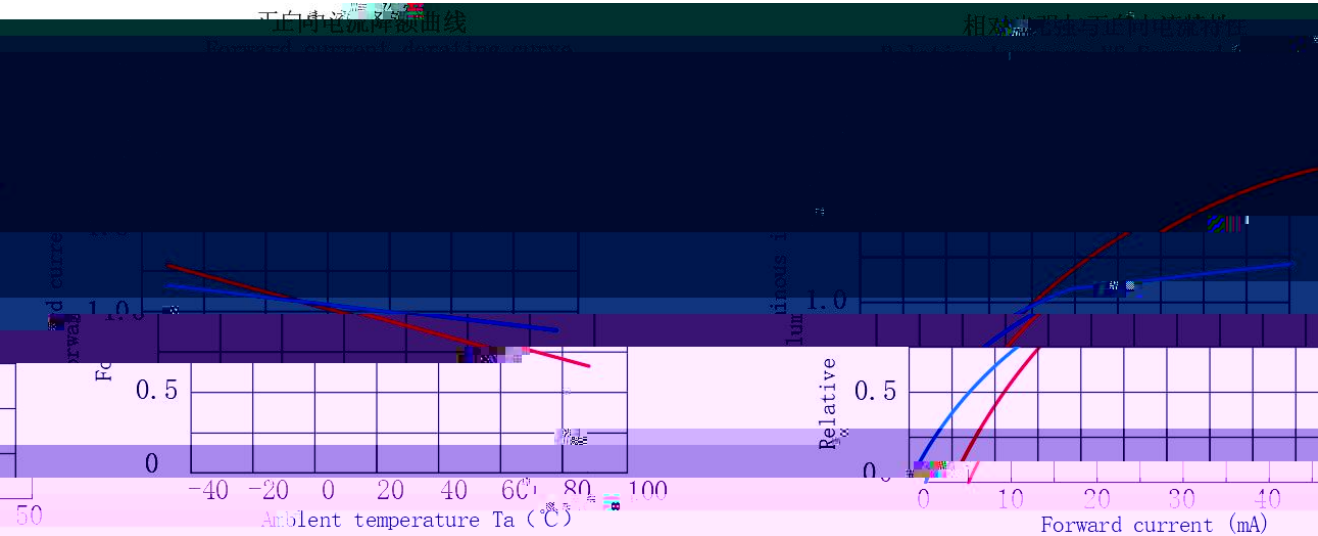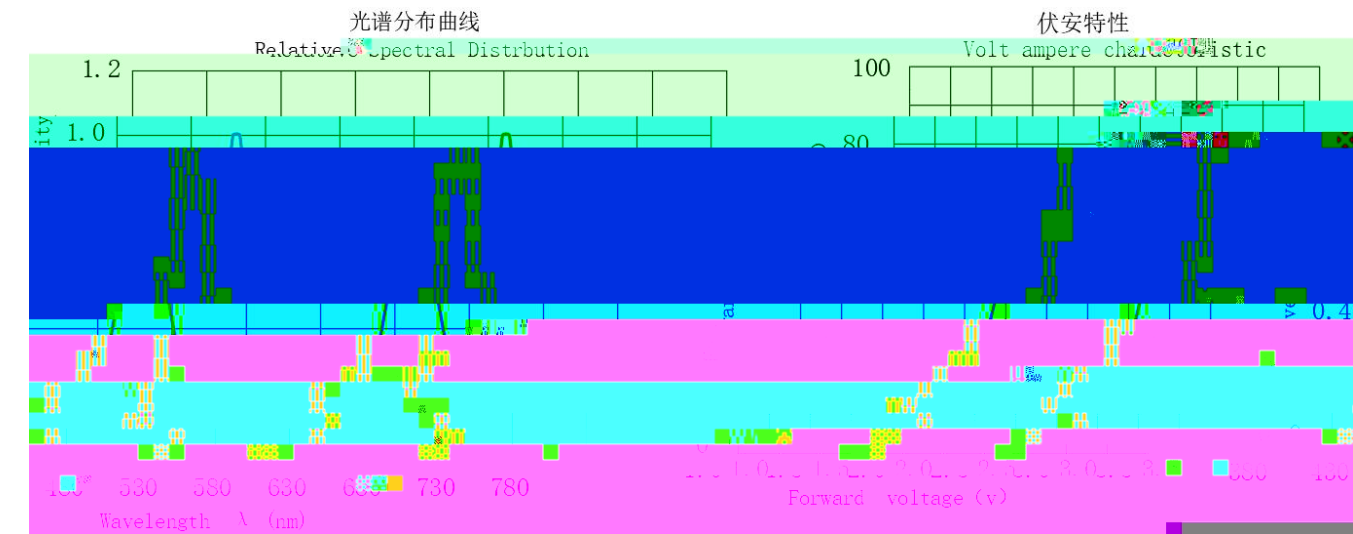

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty
Endurance test	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85±5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1


100 =

1 μ s=10⁻⁶

÷—8 Δ r



外形尺寸

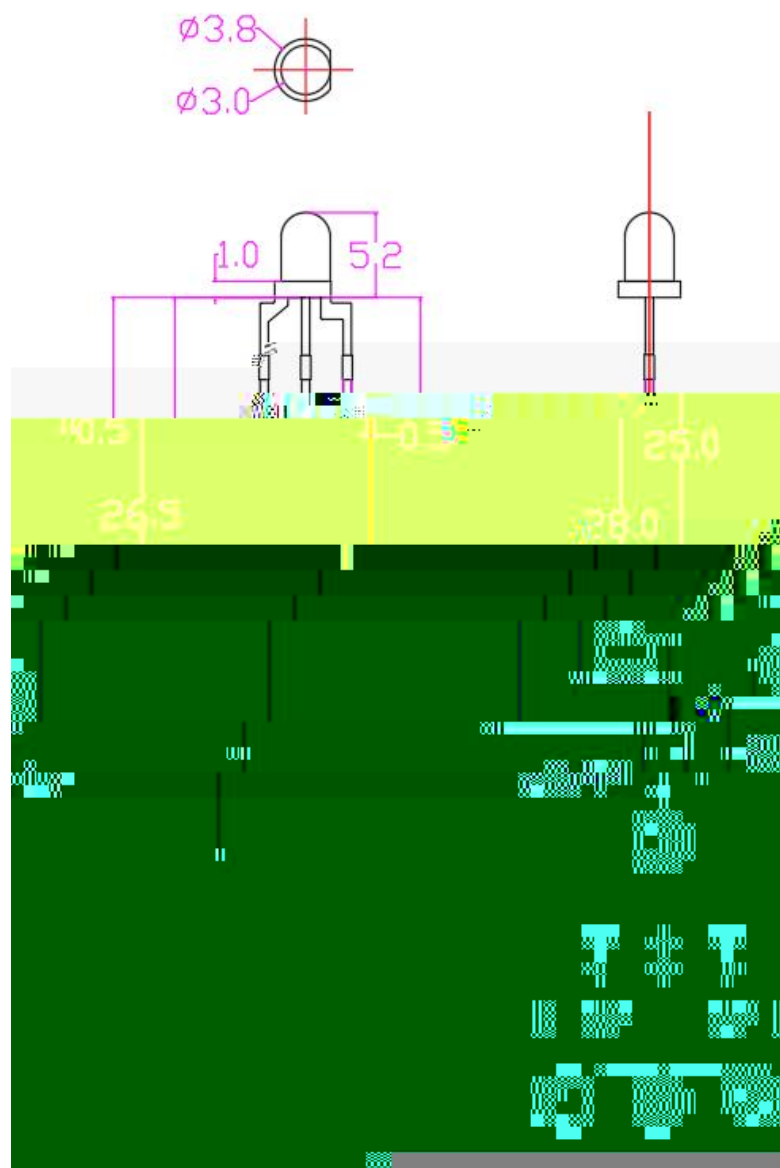

(Note)

1.

Dimensions are in millimeters.


2.

$\pm 0.50\text{mm}$.

Tolerances unless mentioned are $\pm 0.50\text{mm}$.

包装

- *
In Bags
- *
Moisture Proof and Anti-Electrostatic Foil Bag

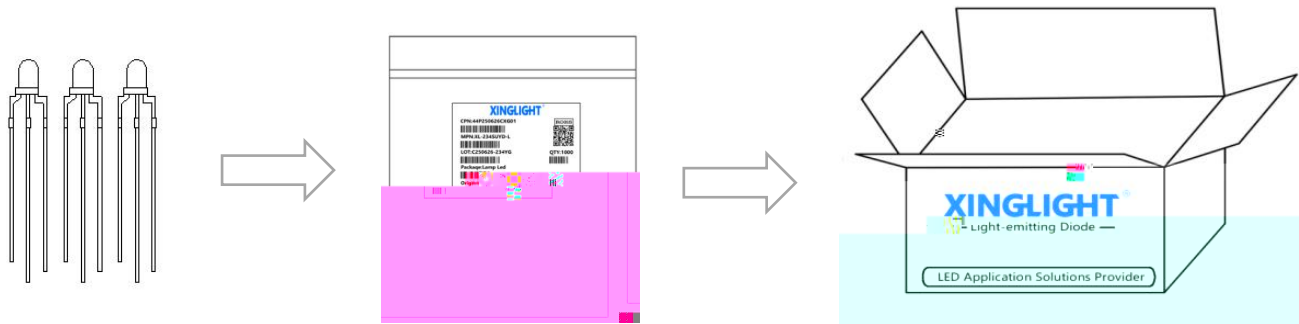

标签说明 Label Expansion


CPN: 批号/档位 LOT: 日期/封装颜色

MPN: 型号 VF: 电压代码

CPN: 44P250626CXG01 LOT: 2018011500

CPN: 44P250626CXG01 LOT: 2018011500

CPN: 44P250626CXG01

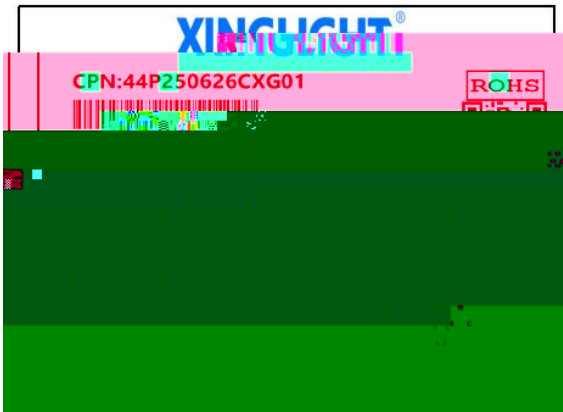

使用注意事項 (1)

1.

LED

LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

使用注意事項 (2)

Precautions (2)


2mm LED
LED
When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.

LED LED A LED LED
In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resi

使用注意事項 (3)

Precautions (3)

4、

