

6070 (3W) 发光二极管

特点：C) :

应用领域 (P) :

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项

Q
B
E
B


3




光电参数 Ta=25 (ta=25)




警告



	LM	IF=350mA




典型特性曲线

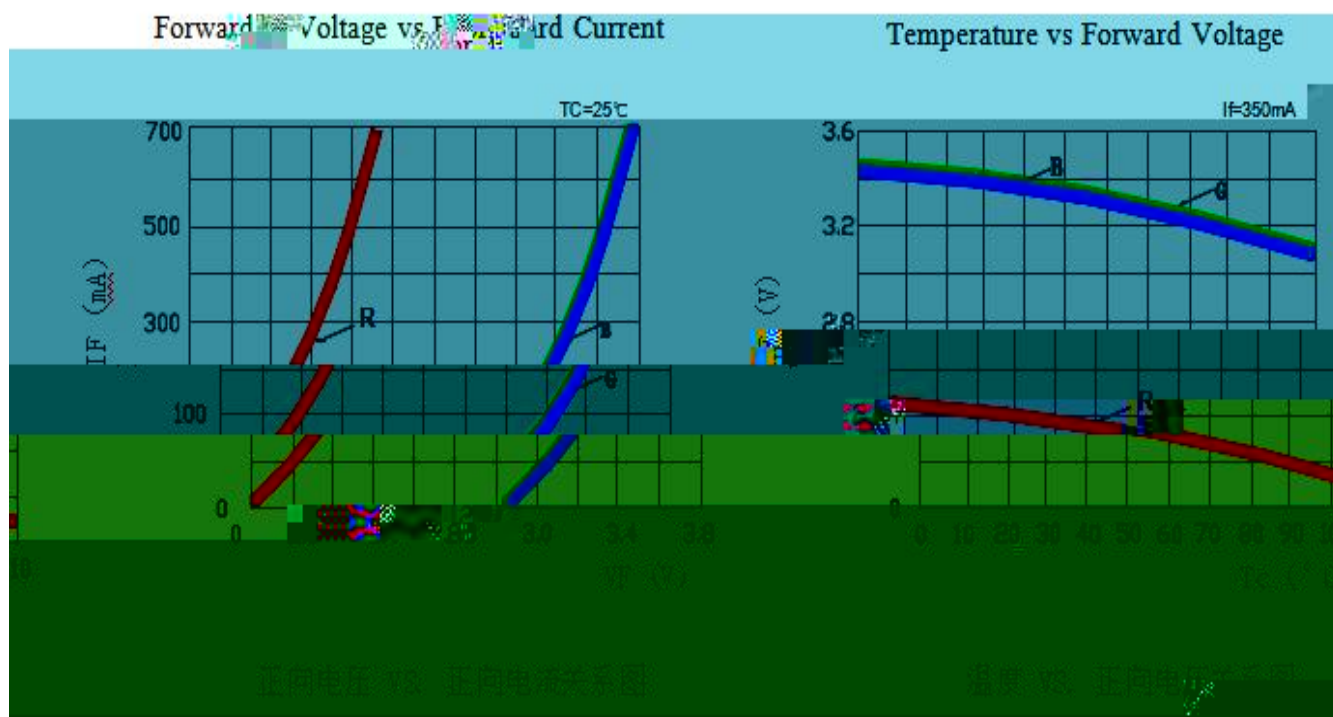

Forward Current vs. Relative Luminous Flux



Temperature vs. Relative Luminous Flux




Part No. :XL-~~HD60725GDC A401~~
~~HD070GDC A401~~



Part No. :XL-HP60725GDC-A401

外形尺寸

Outline Dimension

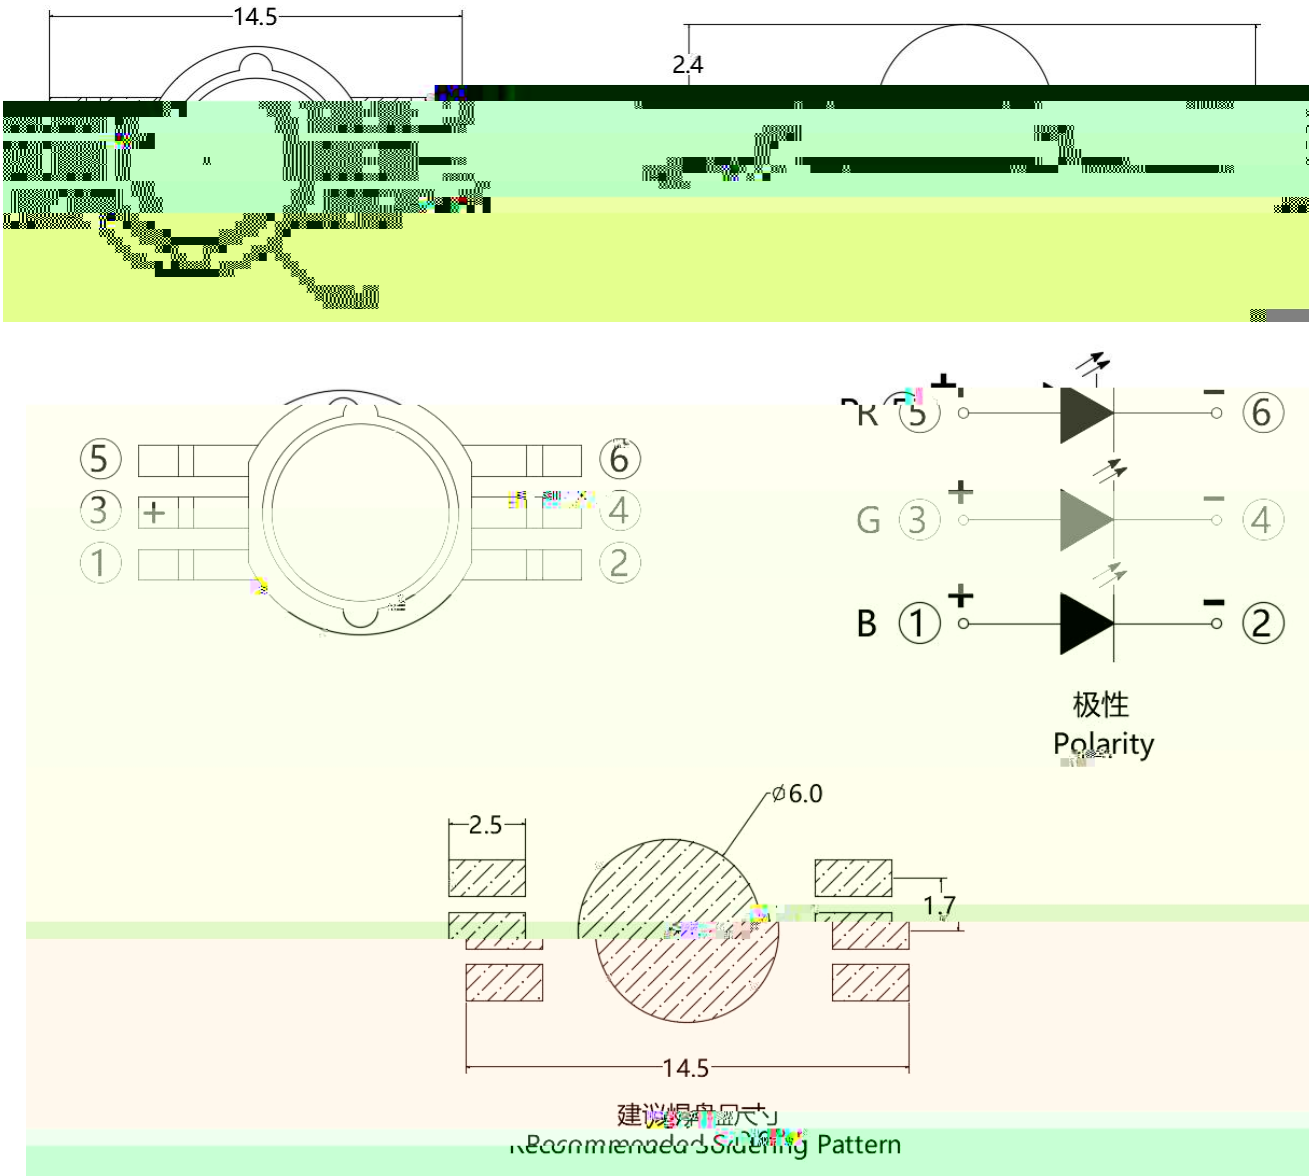

1. mm
- Remarks: All dimensions are in millimeters.
2. $\pm 0.25\text{mm}$
- Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted







使用注意事项 (1)

Precautions (1)






使用注意事项 ()



When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

眼睛保护警告

LED

LED

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

