[00E857VXUXEZ I8 ذ ◦ ת

特点（ ）：

* L/W/H :F5/5.8*5.0*8.7*28mm

Appearance dimension (L / w / h): F5/5.8*5.0*8.7*28mm

* : /

Luminous color and colloid: high brightness red Blue / Aeroso l colloid

* ROHS

Environmental protection pro cts meet 2HS requirements

* MSL :2

Moistu el MSL A levels

* EIA

EIA standard ckaging

* r r

目录

Catalogue

E，！（ … … >9

电性参数

亮度分档

：

代码	最小值	最大值	单位

电压分档

：

波长分档

：

典型特性曲线

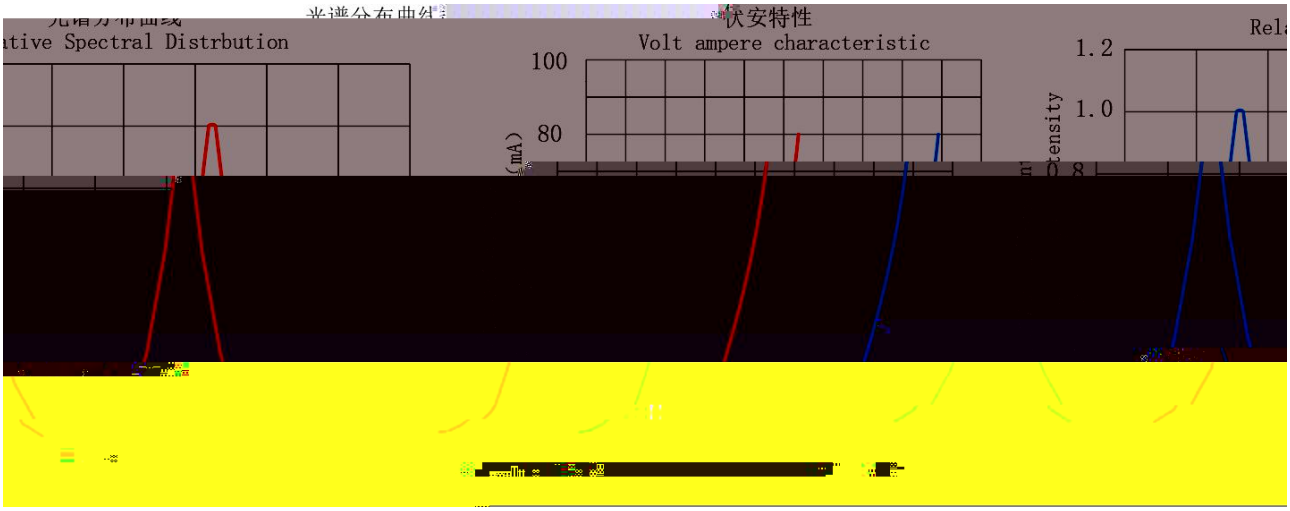

正向电流降额曲线

相对光强与正向电流特性

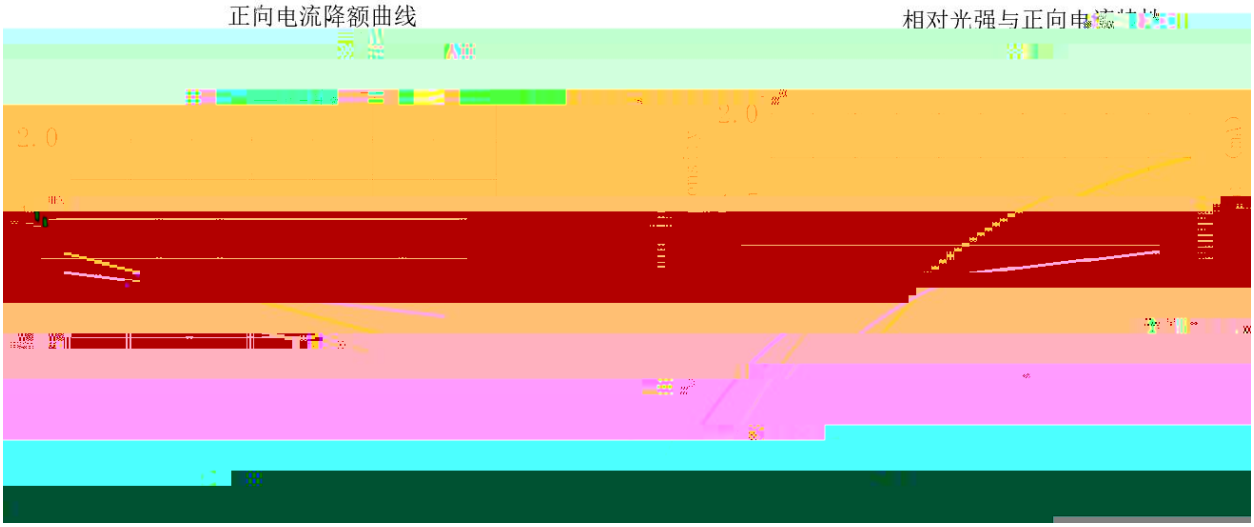

光强与环境温度曲线

相对辐射强度与空间角度关系

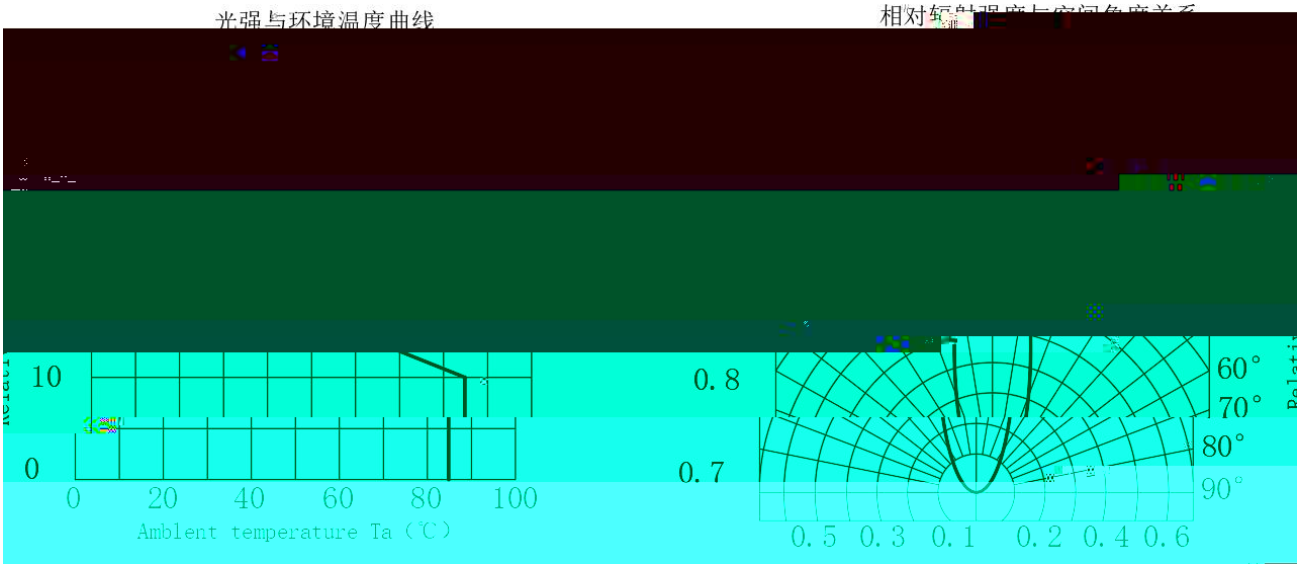

XINGLIGHT®

Part No.: XL-[redacted]

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty
Endurance test					

外形尺寸

(Note)

1.

Dimensions are in millimeters.

2. Ñ0 `Ey D

包装

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag



使用注意事項(1)

1.
LED LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some h

使用注意事项（2）

Precautions (2)

2mm LED
LED

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.

LED LED A LED LED

In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resistance to each LED to ensure the consistent brightness of LED.

使用注意事项（3）

Precautions (3)

4、其他事项：

*