XL-502UYC F5 技术数据表

特点（ ）：

* : F5/5.5*5.0*8.7*18mm
Appearance dimension: F5/5.5*5.0*8.7*18mm
* : /
Luminous color and colloid: yellow brightness White /water colloid
* ROHS
Environmental protection products meet ROHS requirements
* MSL :2
Moisture sensitivity level MSL : 2 levels
* EIA
EIA standard packaging
*
Long operating life
*
High energy efficiency, fast startup
*
Low voltage DC drive

应用领域（ ）：

* ;
Home appliances, digital, communication
*
Automotive Electronics
*
Lighting decoration
*
electronic toy
*
electronic clock
*
Traffic instructions
*
Medical beauty instruments
*
Electronic teaching equipment
*
Urban lighting

目录

Catalogue

电性参数

Luminous Intensity	Iv	900	1300	1800	mcd	IF=20mA
Dominant Wave Length	λd	585	590	595	nm	IF=20mA
Peak Wave Length	λp	/	590	/	nm	IF=20mA
Forward Voltage						

亮度分档

：

代码	最小值

电压分档

：

波长分档

典型特性曲线

光谱分布曲线
Relative Spectral Distribution

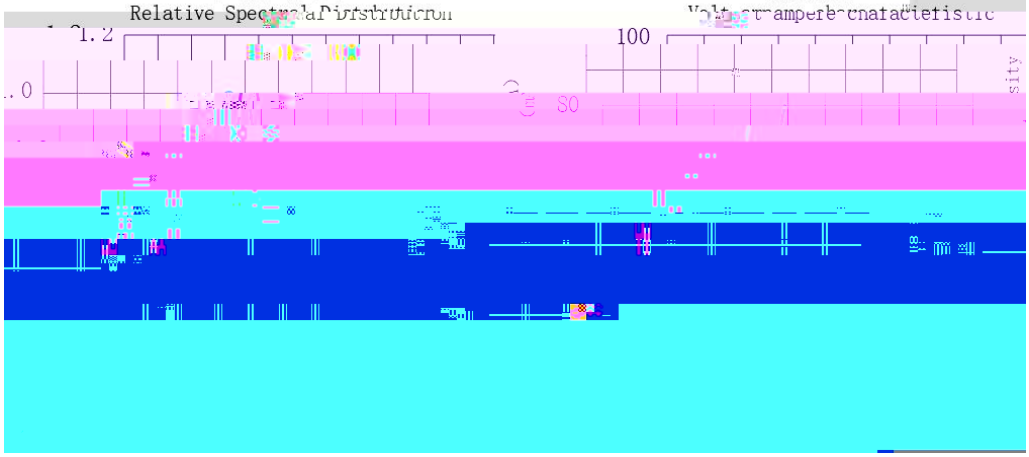

伏安特性

正向电流降额曲线
Forward current derating curve

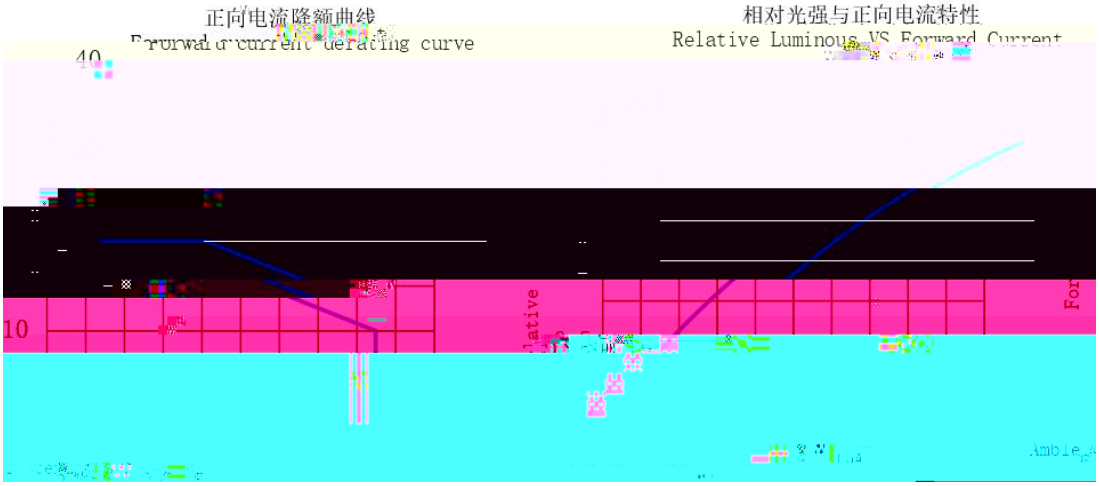

相对光强与正向电流特性
Relative Luminous VS Forward Current

光强与环境温度曲线
Luminous Intensity VS Ambient Temperature

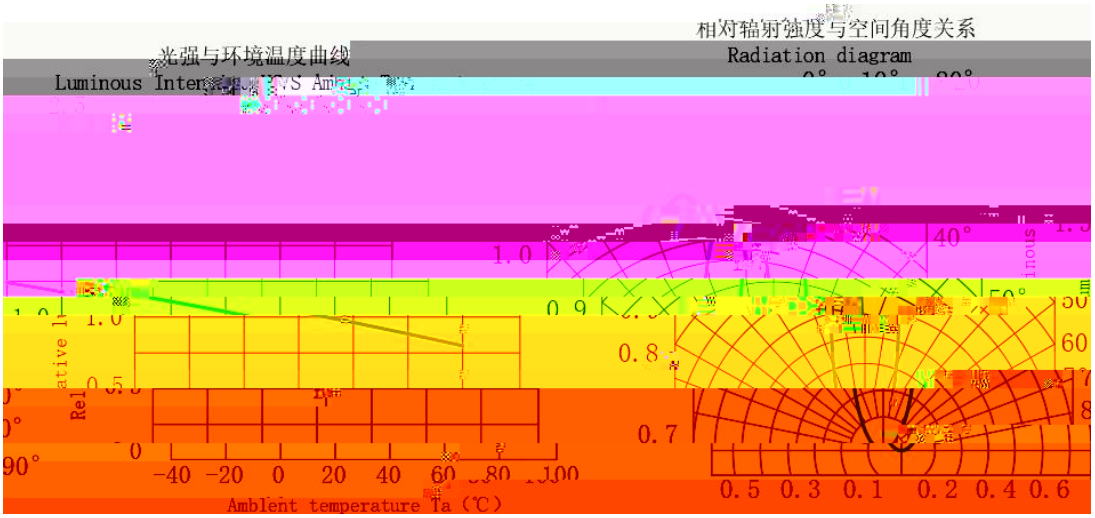

相对辐射强度与空间角度关系
Radiation diagram

±

±

可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	Ta=25 ±5 ,IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85±5 , RH= 85 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85±5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40±5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ±5 30mins 5mins -40 ±5 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ±5 5mins -45 ±5 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0 ° ~ 90 ° ~			

外形尺寸

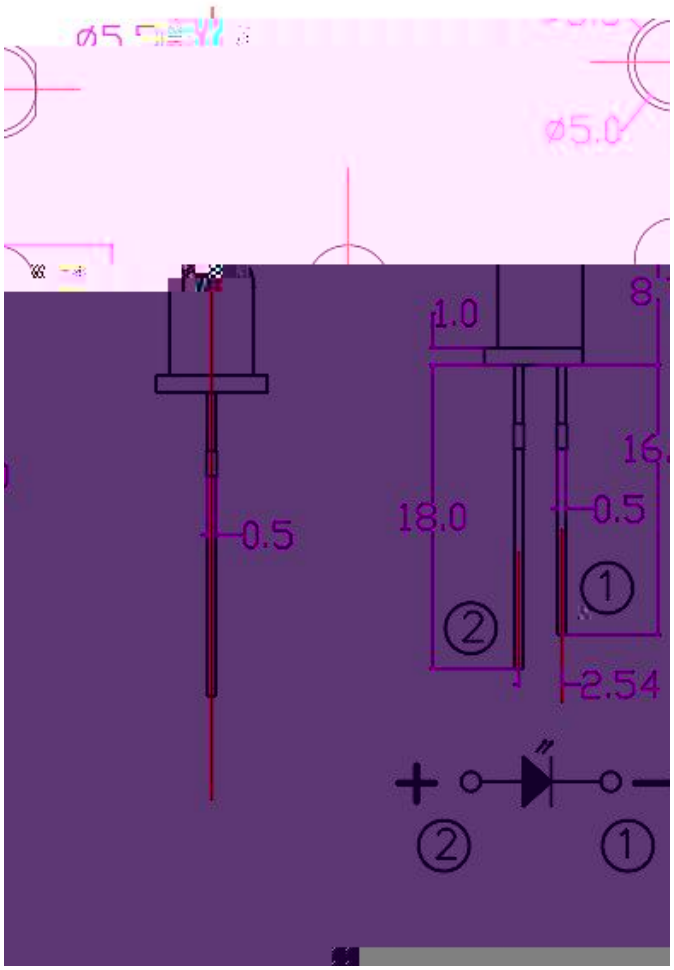

1.

2. mm .

使用注意事项(2)

(2)

LED

LED

使用注意事项（）

（）

8、其他事项：

*

*



*