XL-DZ324SURSYGW/B 技术数据表

F3MM 红普绿双色灯座共阳

特点（ ）：

* :7.0*5.0*6.5mm

Appearance dimension :7.0*5.0*6.5mm

* : /

Luminous color and colloid: Red Green Light /water colloid

* ROHS

Environmental protection products meet ROHS requirements

* MSL :2

Moisture sensitivity level MSL : 2 levels

* EIA

EIA standard packaging

*

Long operating life

*

Reduced maintenance costs

*

High energy efficiency, fast startup

应用领域（product application）

*

Internet of Things

*

medical treatment

*

converter

*

目录

Catalog

电性参数

Max Power Dissipation	PD	R	50	mW
		G	50	
Max Continuous Forward Current	IF	R	20	mA
		G	20	
Peak Forward Current	IFP	R	80	mA
		G	80	
Max Reverse Voltage	VR	5		V
Antistatic ability	ESD	2000		V
Operating Temperature Range	TOPR	-40 ~ +85		
Storage Temperature Range	TSTR	-40 ~ +85		
/ Lead Soldering Temperature/Time	TSOL	260 Ò6S		/S

亮度分档

：

电压分档

典型特性曲线

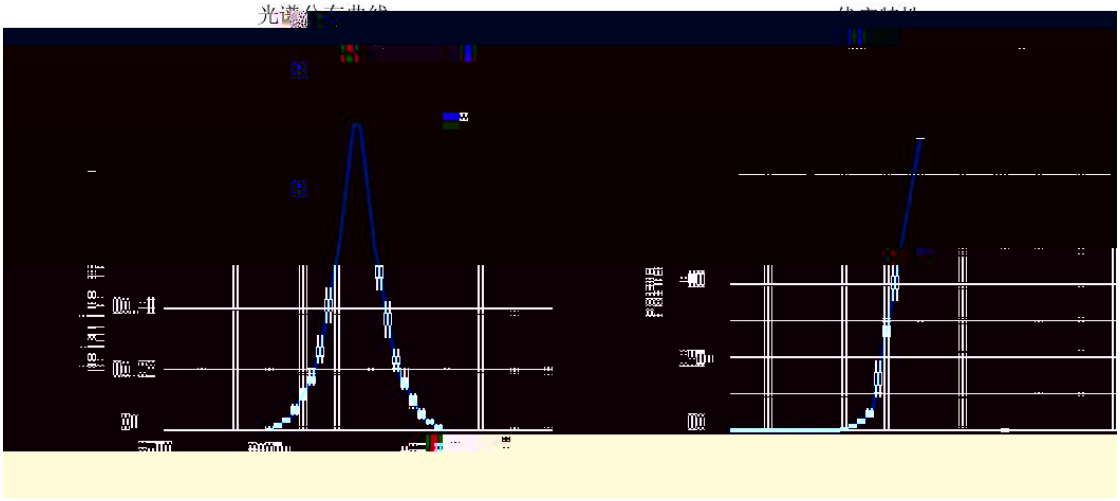

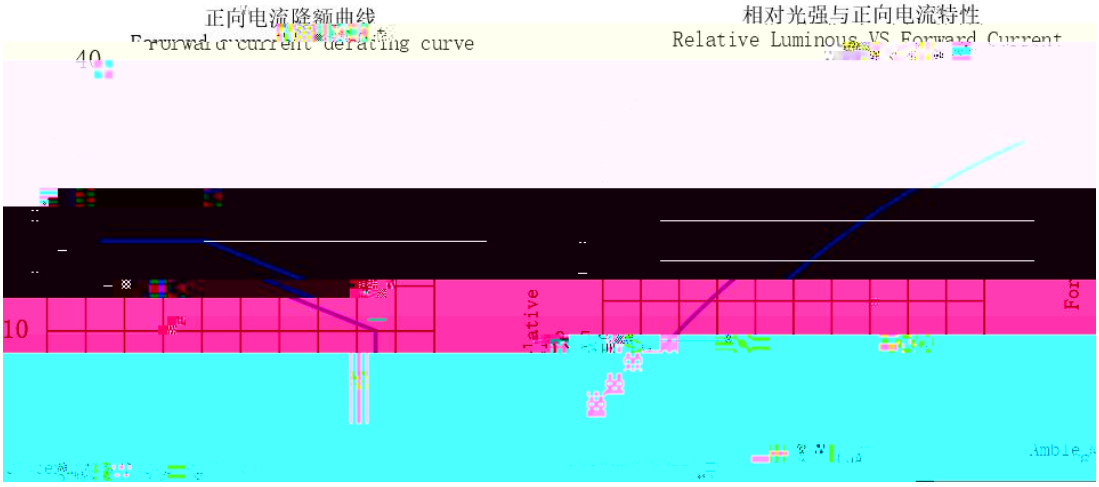

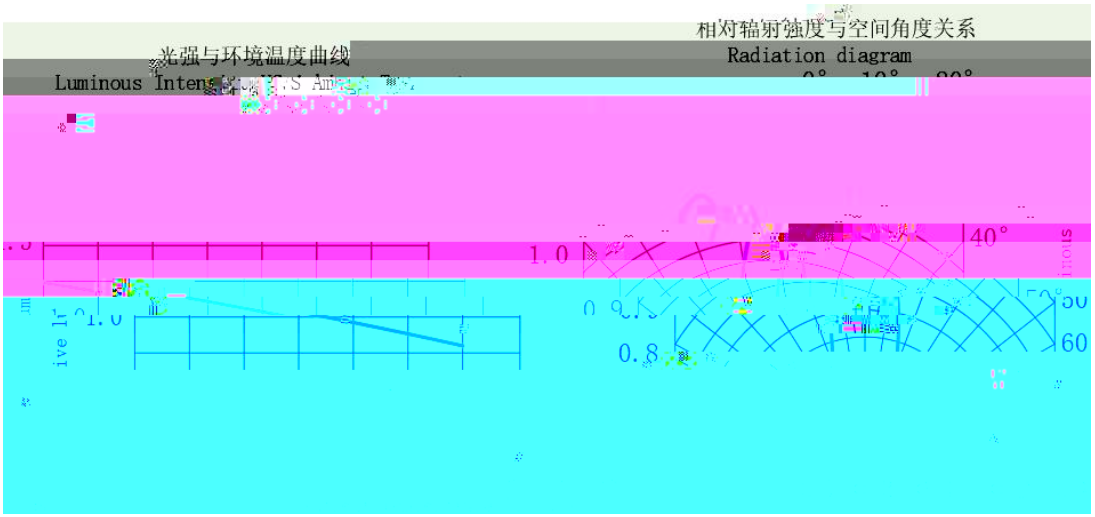

25 + 5 C./Note: If not otherwise indicated, the test environment temperature is 25 + 5 C.

可靠性试验

Reliability Test Item's And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty

外形尺寸

包装



使用注意事项（2）

Precautions (2)

一、设计建议

LED

A LED B

LED V_F LED

I