电性参数

ǎ ^ Ta=25Ņ˜ (

包装（2）

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Anti-Electrostatic Foil Bag

◇ 外包装箱 Cardboard Box

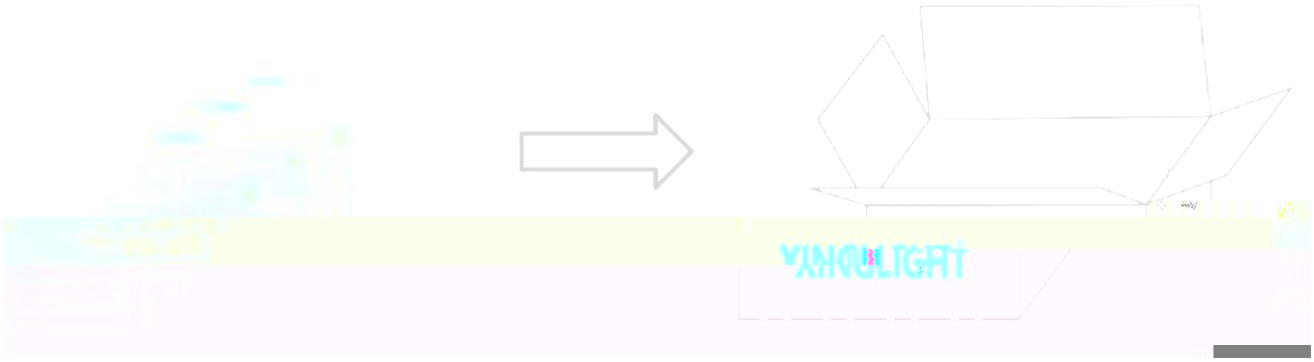

◇ 标签说明 Label Expantion

焊接指导（2）

Guideline for Soldering (2)

ضِ U ą ˘ ضِ Ƀ G 30Ṇ Ð Ѝ 3 № ˘ Ь 50Ṇ Ð Ѝ

30 Â

ą ỉ ɾ ³ ╕ ╠˘ ѽ ą ╕ Ь Ψ LED ė № ᴴ Â

Ӟ ˘ ₩ ᴡ Ь 300W˘ ᑫ ↕˜ LED ᴴ Â

ί ᵣ ’ ѽ Ð ᑫ Ψ LED ᴴ Â

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30Ṇ for 3 min-ή ڪ