XL-DZ304UYD/3 技术数据表

F3MM 超黄发黄三孔灯

特点（ ）：

* : 15.5*4.5*12.0mm

Appearance dimension : 15.5*4.5*12.0mm

* : /

Luminous color and colloid: Yellow Light /Yellow colloid

* ROHS

Environmental protection products meet ROHS requirements

* MSL :2

Moisture sensitivity level MSL : 2 levels

* EIA

EIA standard packaging

*

Long operating life

*

Reduced maintenance costs

*

High energy efficiency, fast startup

应用领域（product application）

*

Internet of Things

*

medical treatment

*

converter

*

Storage servers and communication

* etc

目录

电性参数

Parameter	Symbol

亮度分档

代码	最小值	最大值	单位	测试条件
A4	300	400	mcd	IF=20mA
A5	400	500		
A6	500	700		
A7	700	900		

亮度误差±10% Brightness error ±10%

电压分档

代码	最小值	最大值	单位	测试条件
N12-7	1.8	2.0	V	IF=20mA
N12-8	2.0	2.2		
N12-9	2.2	2.4		

电压误差±0.1V Voltage error 0.1V

波长分档

代码	最小值	最大值	单位	测试条件
HY03	585	587.5	nm	IF=20mA
HY04	587.5	590		
HY05	590	592.5		
HY06	592.5	595		

波长误差±1nm Wavelength error ± 1nm

可靠性试验

Reliability Test Item's And Conditions

Class	Test item	Testing environment	Testing time	

外形尺寸

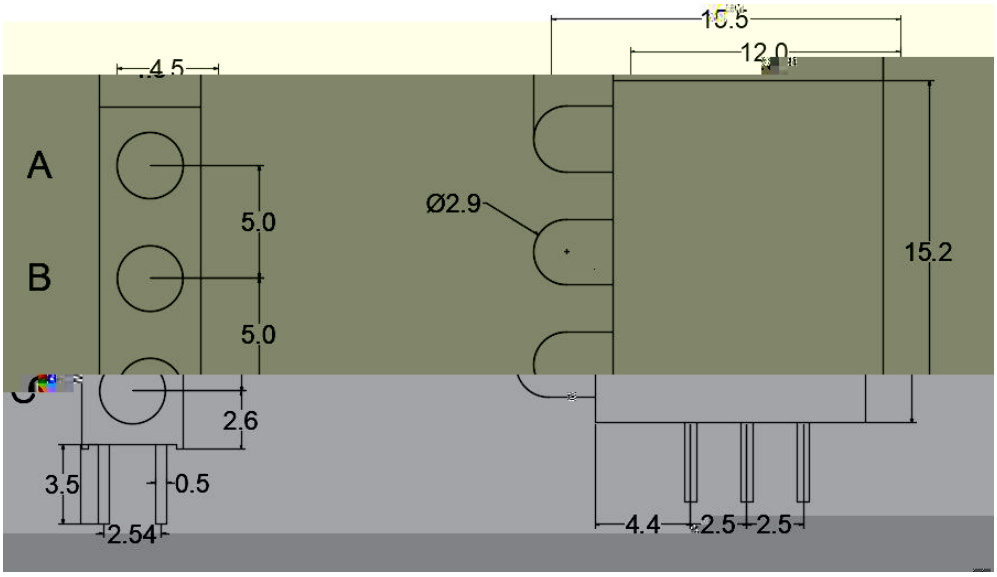

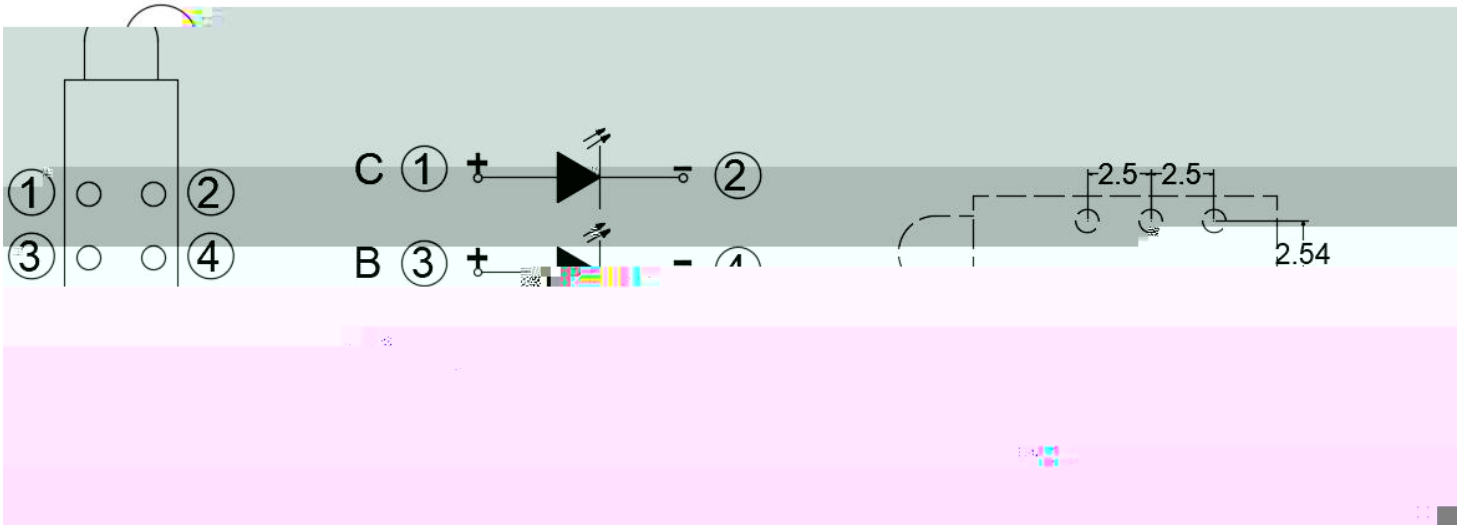

(Note)

1.

Dimensions are in millimeters.

2. Ñ 0.25mm .

Tolerances unless mentioned are Ñ 0.25mm.

包装

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag

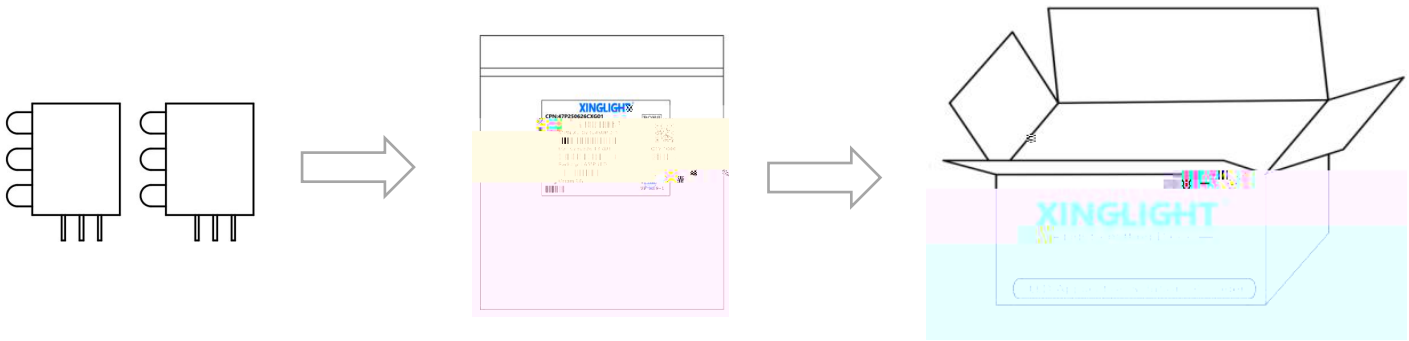

Part

使用注意事項（3）

Precautions (3)

4、其他事項：

*_ ʊ

*When handling the product, touching the encapsulant with bare hands will not one_t œn ynarh T

beb