

目录

Catalogue


Electrical Characteristics.....3

Typical Characteristic Curves.....5

Outline Dimensions.....7

Packaging..... 8


Precautions..... 9



电性参数

Electrical Characteristics

Absolute Maximum Ratings			Ta=25				
Parameter	Symbol		Rating			Unit	
Consumed power	Pd		50			mW	
Max Continuous Forward Current	IF		20			mA	
Peak Forward Current	IFp		80			mA	
Operating ambient temperature	Topr			-40℃ ~ +85℃			
Storage ambient temperature	Tstg			-40℃ ~ +85℃			
Welding conditions	Tsol		reflow soldering		240℃	6s	
			manual welding		300℃	3s	
					2.0mm		
Initial Electrical Optical Characteristics			Ta=25				
Parameter	Symbol	Min.	Typ.	Max.	Unit	Test conditions	
Luminous Intensity	Iv	50	/	300	mcd	I = 20mA	



亮度分档:

Brightness grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions
A1	50	100	mcd	IF=20mA
A2	100	200		
A3	200	300		

电压分档:


Voltage grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions
N12-7	1.8	2.0	V	IF=20mA
N12-8	2.0	2.2		
N12-9	2.2	2.4		

波长分档:




Wave Length grading

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions
HYG01	560	562.5	nm	IF=20mA
HYG02	562.5	565		
HYG03	565	567.5		
HYG04	567.5	570		
HYG05	570	572.5		
HYG06	572.5			




典型特性曲线

Typical Characteristics Curves

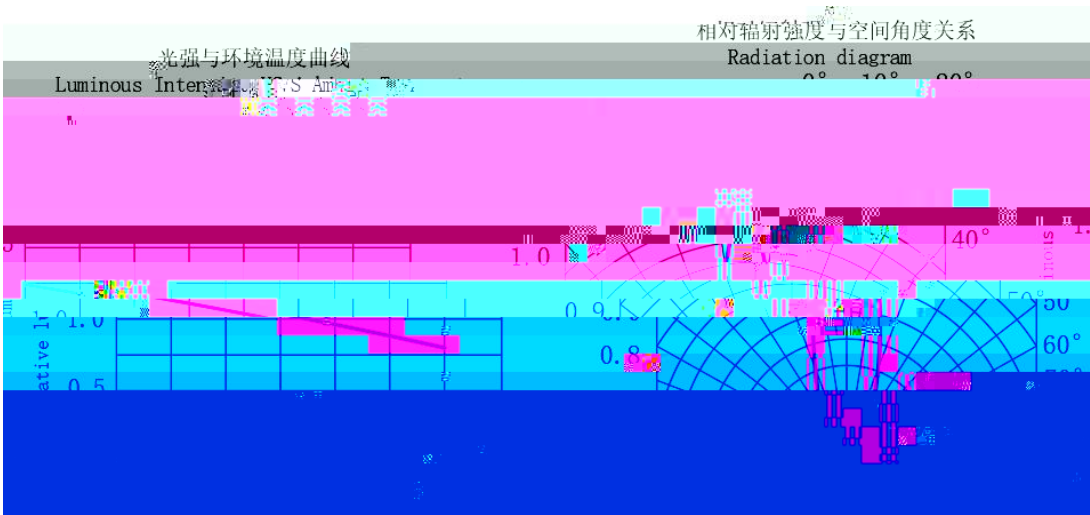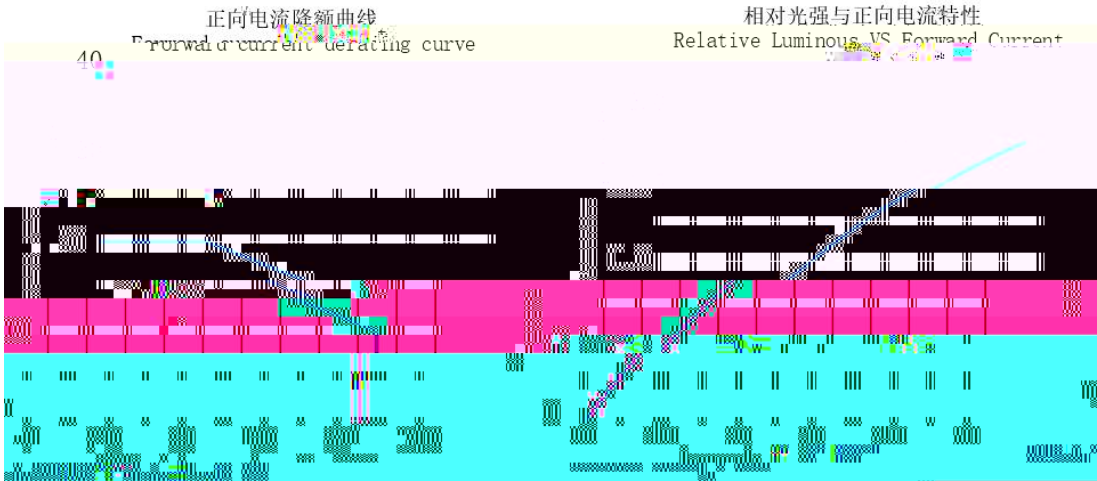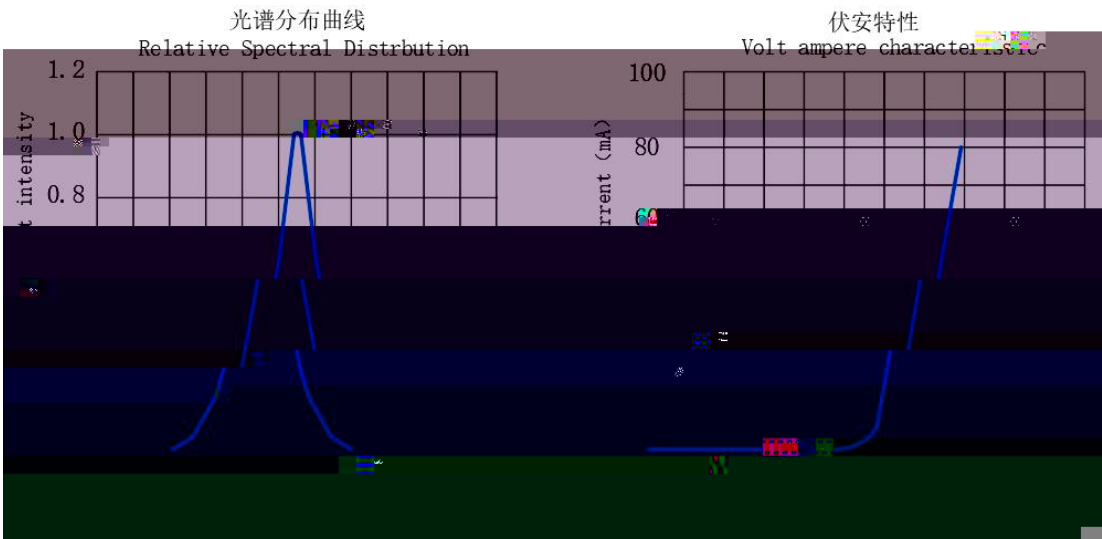


: 25 + 5 C./Note: If not otherwise indicated, the test environment temperature is 25 + 5 C.




可靠性试验

Reliability Test Items And Conditions




外形尺寸

Outline Dimension

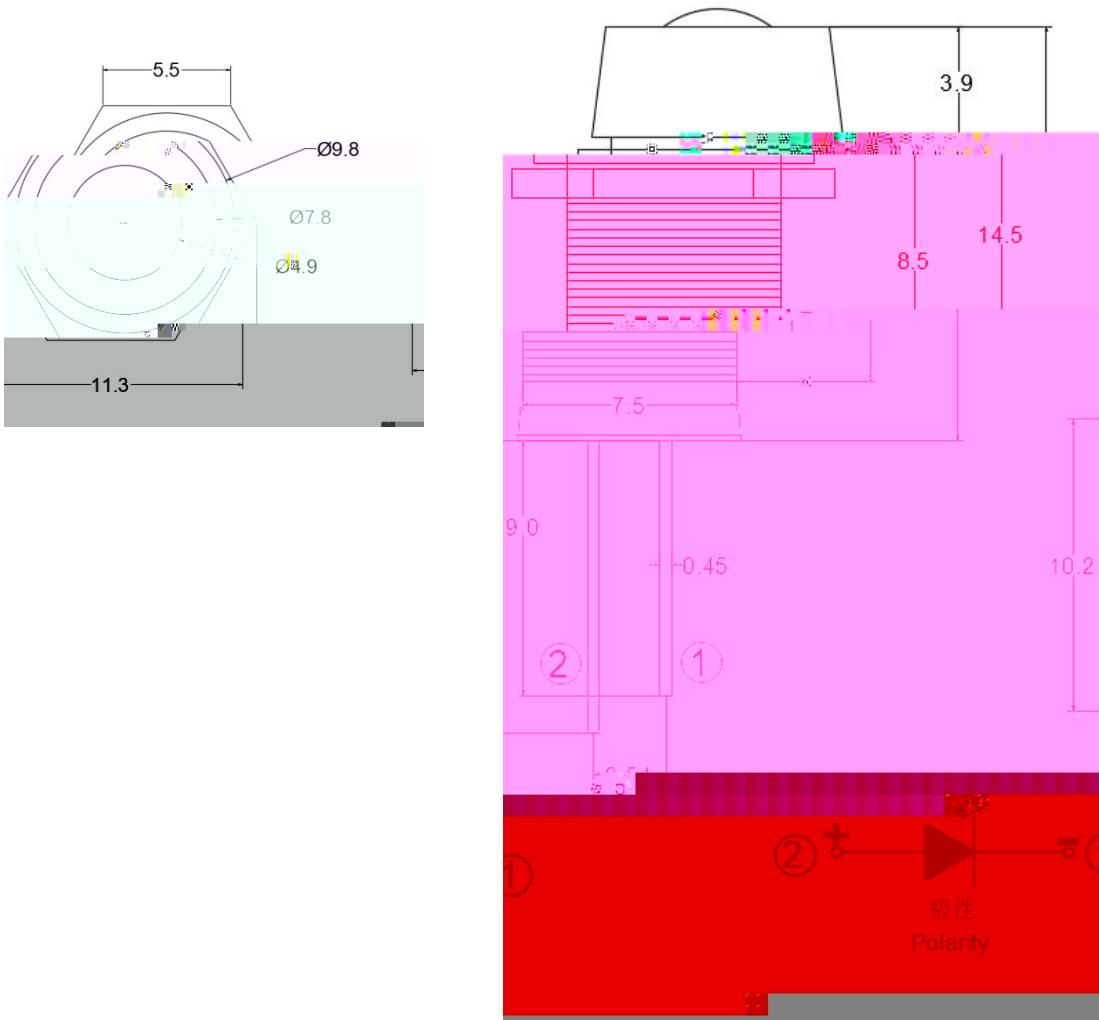

(Note)

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are ± 0.25 mm.





使用注音字母 ()

Precautions (1)

1. **APPLY**

LED

LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

2. Keep in storage

LED

3



使用注意事項 ()

5. Weld

2mm LED

LED

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.




6. Drive way

LED LED A LED LED

In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resistance to each LED to ensure the consistent brightness of LED.

Circuit model A

Circuit model B

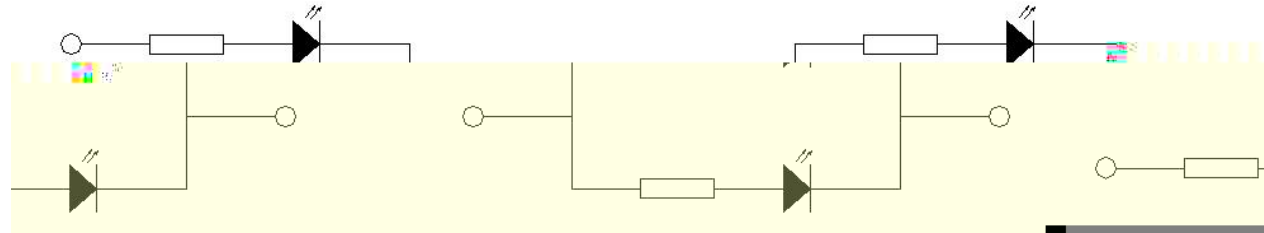

7. Electrostatic protection

LED InGaN

HBM<1000V <100V

High increase of static electricity and current will damage LED. Use antistatic devices such as protective belts and gloves. Note: human discharge mode HBM <1000V; machine discharge mode <100V.

