





电性参数

Ta=25 Absolute Maximum Rating(ta=25)




Consumed power	Pd	R	50	mW
		G	70	
Peak Forward current	IFP	R	80	mA
		G	80	
Forward working current	IF	R	20	mA
		G	20	
Reverse voltage	VR	R	5	V
		G	5	
Antistatic ability	ESD	2000		V
Operating ambient temperature	Topr	-40 ~ +85		
Storage ambient temperature	Tstg	-40 ~ +85 C		
Welding conditions	Tsol	reflow soldering	260°C 6s	
		manual welding	300°C 3s	

* $\leq 0.1\text{ms}$ $\leq 1/10$ * Note: Pulse width $\leq 0.1\text{ms}$, Duty $\leq 1/10$

Part No. :XL-3210SURUGC

典型特性曲线

Typical Characteristics Curves

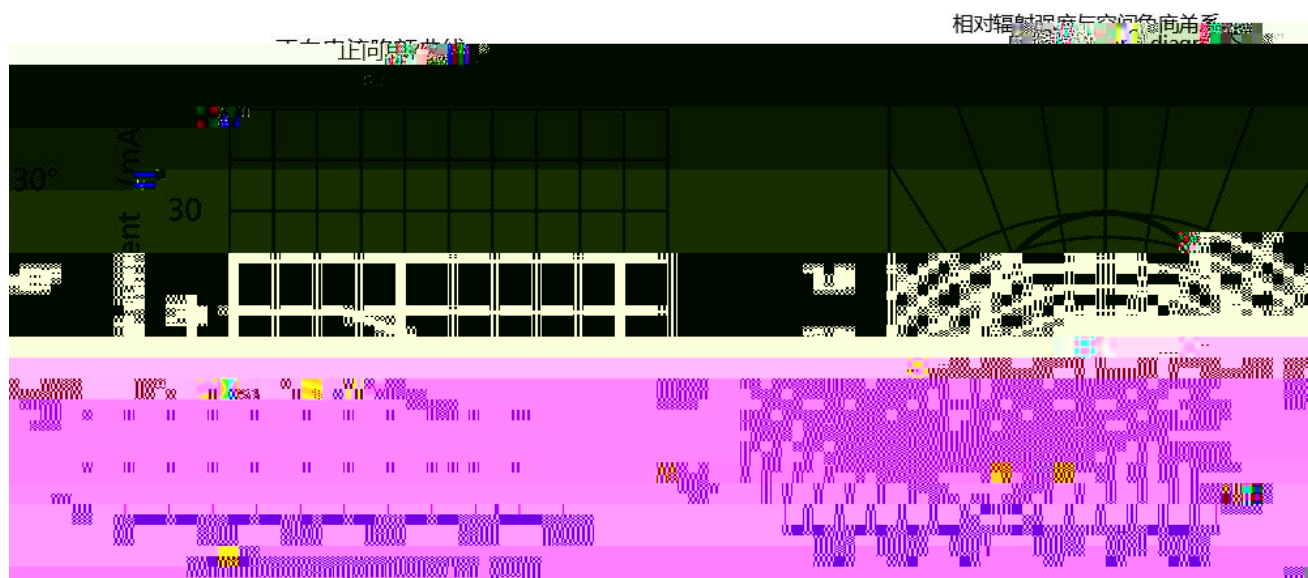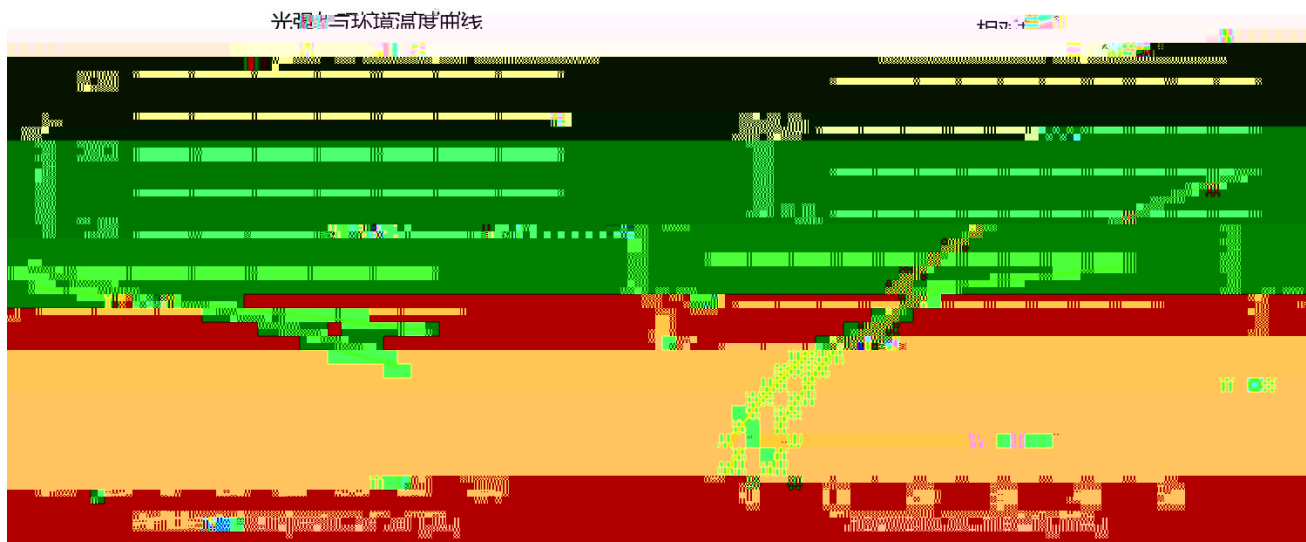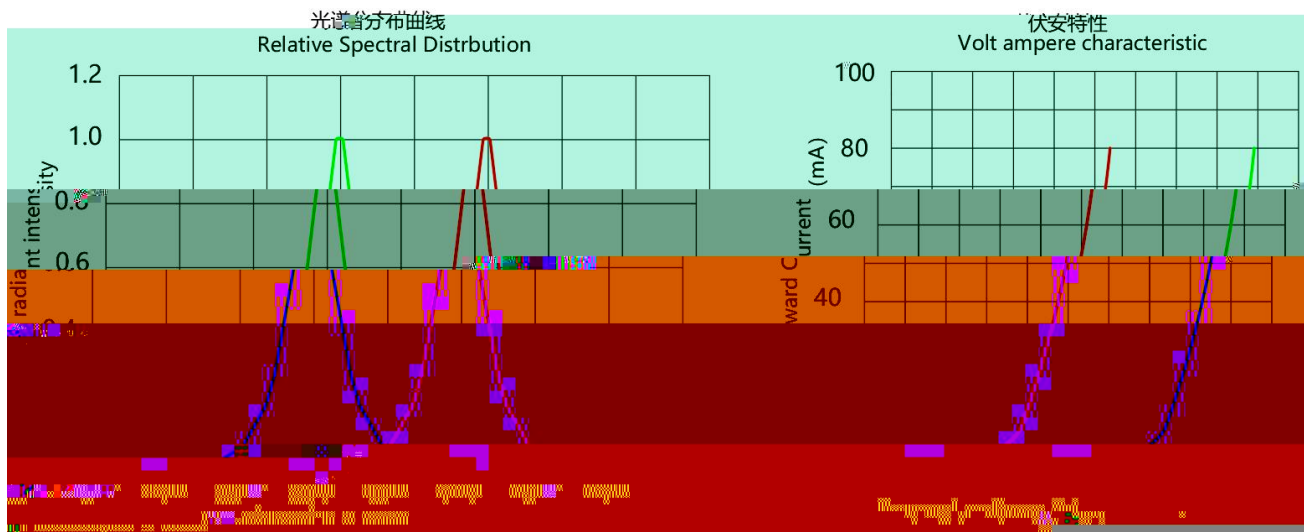

25 ± 5 /Note If not otherwise indicated the test environment temperature is 25 ± 5

Part No. :XL-3210SURUGC



Part No. : XL-3210S-P307











